


# FLOOR DRAIN

Load Rating: Heavy Duty having a Safe Live (Static) Load between 5,000 lbs. (2,250 kg) and 7,499 lbs (3,375 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

FREE AREA  
9.25 SQ IN  
(59.67 SQ CM)

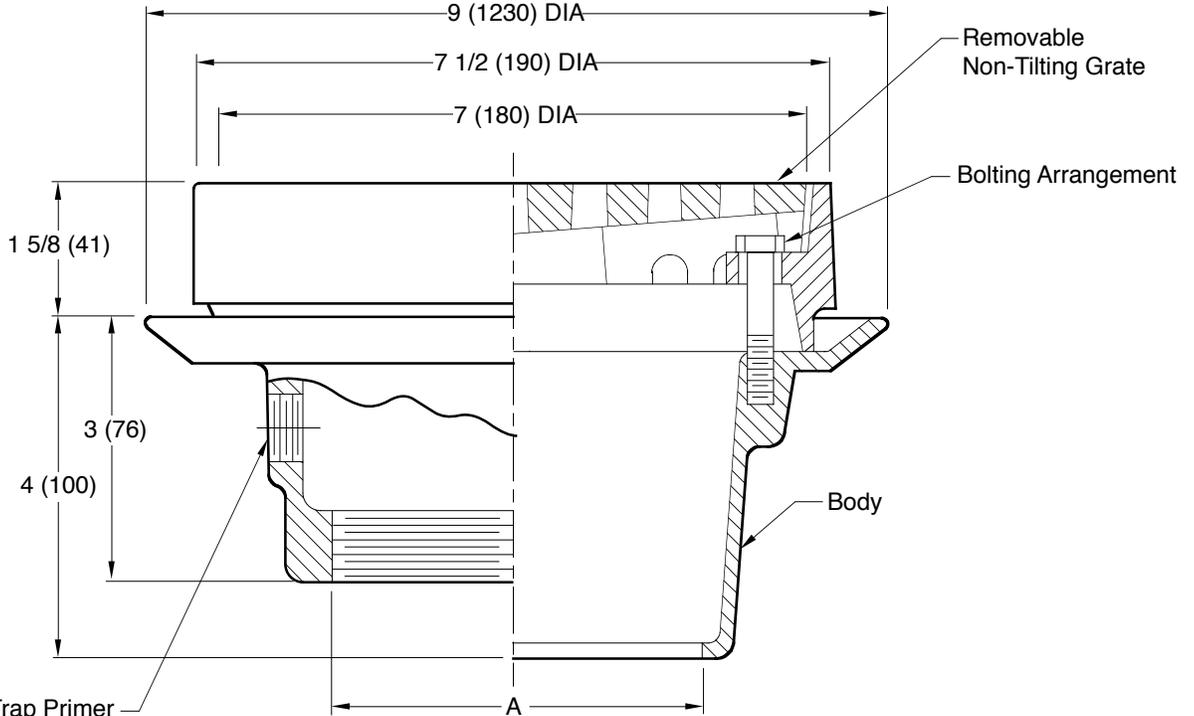

A(Pipe Size) = 02(50), 03(75), or 04(100)

- Fig. 2108C . . . CAULK OUTLET
- Fig. 2108Y . . . NO-HUB OUTLET

**REGULARLY FURNISHED:**  
 Duco Cast Iron Body, Collar and Non-Tilting Slotted ADA Grate.

- VARIATIONS:**
- Flat Bottom Strainer -FBS
  - Trap Primer Connection  
-P050 1/2(13), -P075 3/4(19)
  - T Threaded Outlet
  - Quad Close Trap Seal  
(Specify Fig. 2692)
  - L Speedi-Set® Service Weight Outlet
  - LXH Speedi-Set® Extra Heavy Outlet

- OPTIONAL MATERIALS:**
- All Galvanized -G
  - Nickel Bronze Top -NB
  - Polished Bronze Top -PB

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER **S2108**  
 SIZE **A**  
 SCALE: **NONE**  
 DATE: **12-16-88**  
 APPROVED BY: **TDavis**  
 CHECKED BY: **CR**  
 DRAWN BY: **WAS**  
**2108**  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE  
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

K	3-10-23	Added ® to "Speedi-Set"	KK	CL	WEIGHT	VOLUME	FIGURE NUMBER
J	1-23-23	Added ADA	KK	JT	POUNDS	CUBIC FEET	2108
H	12-8-22	Removed Seepage Openings	KK	JT			
G	5-10-22	Added Load Rating	KK	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			