



**Whitehall  
 Built-In  
 Bedside Patient  
 Care Unit  
 (formerly referred to  
 as Swivette)**

Includes Models  
**4020, 4022, 4025**



4020-L

Fixture May Show Some Available Options

**Unit** is intended for a Built-In application where face of Cabinet is flush with face of finish wall.

**Important:** For freestanding units that are intended Less Countertop, refer to standard 4010 series submittal option -LCT Less Countertop and Lavy.

**Cabinet** interior surfaces are stainless steel. Interior has a removable stainless steel floor to conceal frame anchors. Specify cabinet material and color selection.

**Toilet** is stainless steel, siphon jet type with white plastic seat and self-sustaining check hinge. Door linkage swivels the toilet into the room when cabinet door is opened. The toilet is locked in place when open and must be unlatched to close.

**Hydraulic Flush Valve** is furnished standard with a 1-3/4" diameter, hydraulically actuated, remote pushbutton. Minimum required flow pressure is 25 PSI with a minimum water consumption of 1.28 GPF.

**Swivel Assembly** is cast iron with a sanitary white powder coat finish, and has a positive watertight, chemical-resistant seal. Swivel assembly requires floor anchoring (hardware provided). **Toilets will withstand a 2,500 pound static vertical load.**

**Floor Anchors** are seismic rated for CBC category IV structures.

**Metal Template** is provided for ease of installation.

**Optional Bedpan Washer** mounts in lieu of the storage compartment and includes a handheld bedpan washer with volume control, positive shut-off and stainless steel hose. **An elevated pressure type vacuum breaker by others is recommended with this selection to prevent backflow or siphonage from occurring and possibly contaminating the water supply. Consult local codes for back flow prevention device requirements.**

**GUIDE SPECIFICATION**

Provide and install Whitehall Built-In Patient Care Unit (specify model number and options). Cabinet frame shall be heliarc welded, type 304 stainless steel, and shall not require wall support. Door on toilet side shall be linked to toilet, so that when door is opened or closed, the toilet will swivel accordingly. Door on lavatory side shall be provided with a toilet paper holder. Doors shall support a 250 pound static, vertical load. Front panel shall hinge open for access to valves and piping. Storage compartment shall be provided above the toilet. Cabinet shall provide front toe space. Toilet shall be stainless steel, elongated, siphon jet type, and shall flush in any position along the arc of movement. Trap shall pass a 2-1/8" ball. Toilet shall withstand loadings of 2,500 pounds without permanent damage. Toilet seat shall have self-sustaining check hinge.


[LINK to IAPMO Pivoting Water Closet Certification](#)

Please visit [www.whitehallmfg.com](http://www.whitehallmfg.com) for most current specifications.




Complies with the following standards:



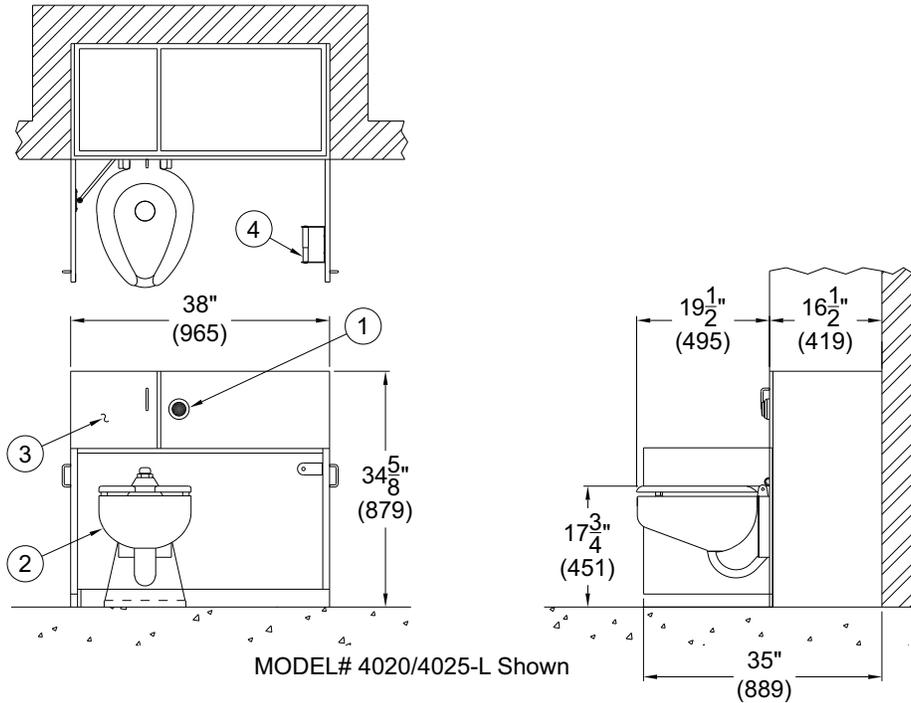

**NOTES:**

- 1. Flush Valve Pushbutton
- 2. Stainless Steel Toilet
- 3. Storage Compartment
- 4. Toilet Tissue Holder

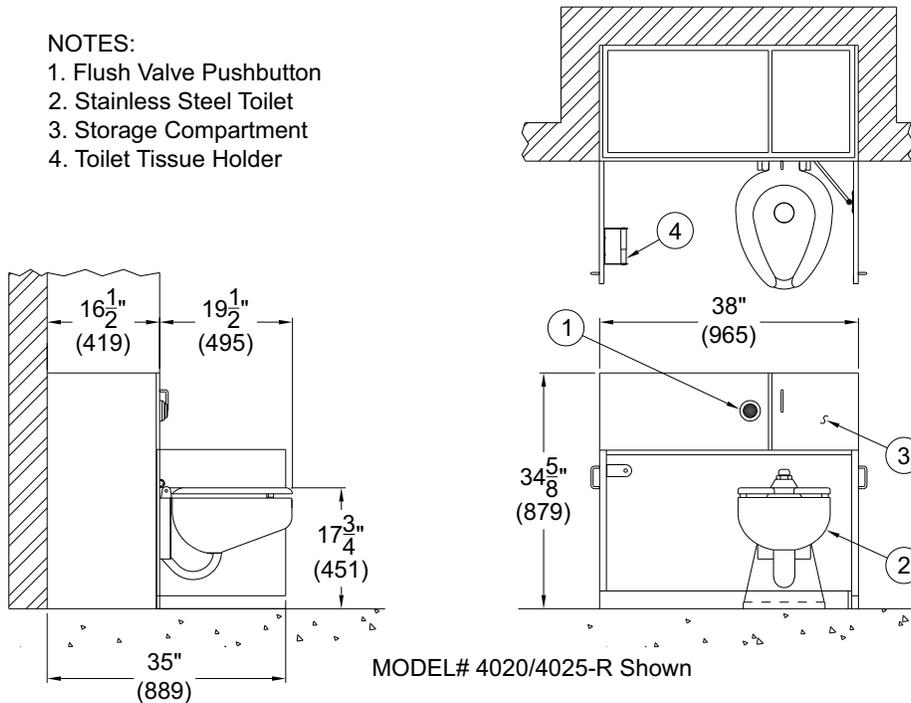

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or suspended data © Whitehall Manufacturing, Member of Morris Group International. Please visit [www.whitehallmfg.com](http://www.whitehallmfg.com) for most current specifications.



**MODEL NUMBER AND OPTIONS SELECTION**

**BASE MODEL NUMBER - BUILT-IN (Must Specify)**

- 4020 Built-In, Back Wall Waste Outlet
- 4022 Built-In, Side Wall Waste Outlet \*\*
- 4025 Built-In, Floor Waste Outlet

**\*\*Note:** Side wall waste outlet ONLY available same side as Toilet Orientation and requires coordinated Cabinet Orientation; EX: 4022-R is Right Side Wall Waste Outlet.

**TOILET ORIENTATION (Must Specify)**

- L Left Hand Toilet       -R Right Hand Toilet

**Notes:** L (Left) or R (Right) indicates Toilet location while in opened position when facing the Fixture.

**FLUSH VALVE SELECTION (Must Specify Gallons Per Flush)**

- 1.28 GPF (High Efficiency)
- 1.6 GPF (EPA Standard\*\*\*)
- 3.5 GPF (Verify Local Codes\*\*\*)

**STORAGE COMPARTMENT OPTIONS (BEDPAN WASHER, DIALYSIS BOX)**

- BW Stainless Steel Bedpan Washer (Built-In)
- DB1 Hemo-Dialysis Box, Single Valve - PVC Ball Valve
- DB1SV Hemo-Dialysis Box, Single Valve - S/S Ball Valve
- DB2 Hemo-Dialysis Box, Dual Valve - PVC Ball Valves
- DB2SV Hemo-Dialysis Box, Dual Valve - S/S Ball Valves
- SS Stainless Steel Storage Shelf within Compartment

**TOILET PAPER DISPENSER OPTIONS**

- EP Exposed Paper Holder (Standard with -FCI option)
- PHE Enclosed (Concealed) Paper Holder

(\*\*\*NOTE: Not available in California)

**CABINET COLOR SELECTION (Must Specify)**

- OCP Color Polyethylene Panels  
Color: \_\_\_\_\_  
(Refer to [POLY LINK](#) for available colors)
- LCC High Pressure Laminate  
Specify Laminate Manufacturer and Color  
Color: \_\_\_\_\_

**TOILET OPTIONS**

- BL Bedpan Lugs
- EGE Enviro-Glaze Color (Toilet Exterior Only)  
Specify: \_\_\_\_\_  
(Refer to [EG LINK](#) for available colors)
- FCI Infectious Control Toilet Flush (Closed Position)  
(NOTE: Provided with -EP Exposed Paper Holder)
- WO3 3" Toilet P-Trap (Requires 3.5 GPF Flush Valve)

**PRODUCT OPTIONS**

- SUG Swing-Up Wall Mounted Grab Bar (Non-ADA)

Options Promote Infectious Disease Control

WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**SELECTION SUMMARY & APPROVAL FOR MANUFACTURING**

Model Number & Options \_\_\_\_\_ Quantity \_\_\_\_\_  
 Company \_\_\_\_\_ Date \_\_\_\_\_  
 Contact \_\_\_\_\_ Title \_\_\_\_\_  
 Approval for Manufacturing/Signature \_\_\_\_\_

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or superseded data © Whitehall Manufacturing, Member of Morris Group International. Please visit [www.whitehallmfg.com](http://www.whitehallmfg.com) for most current specifications.