

# ROOF DRAINS

## SPECIAL ROOF APPLICATIONS

DRAWING NUMBER  
**S1037**

SIZE  
**A**

SCALE:  
**NONE**

DATE:  
**10-8-87**

APPROVED BY:  
**CR**

CHECKED BY:  
**BS**


DRAWN BY:  
**EMB**

**1037**

FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

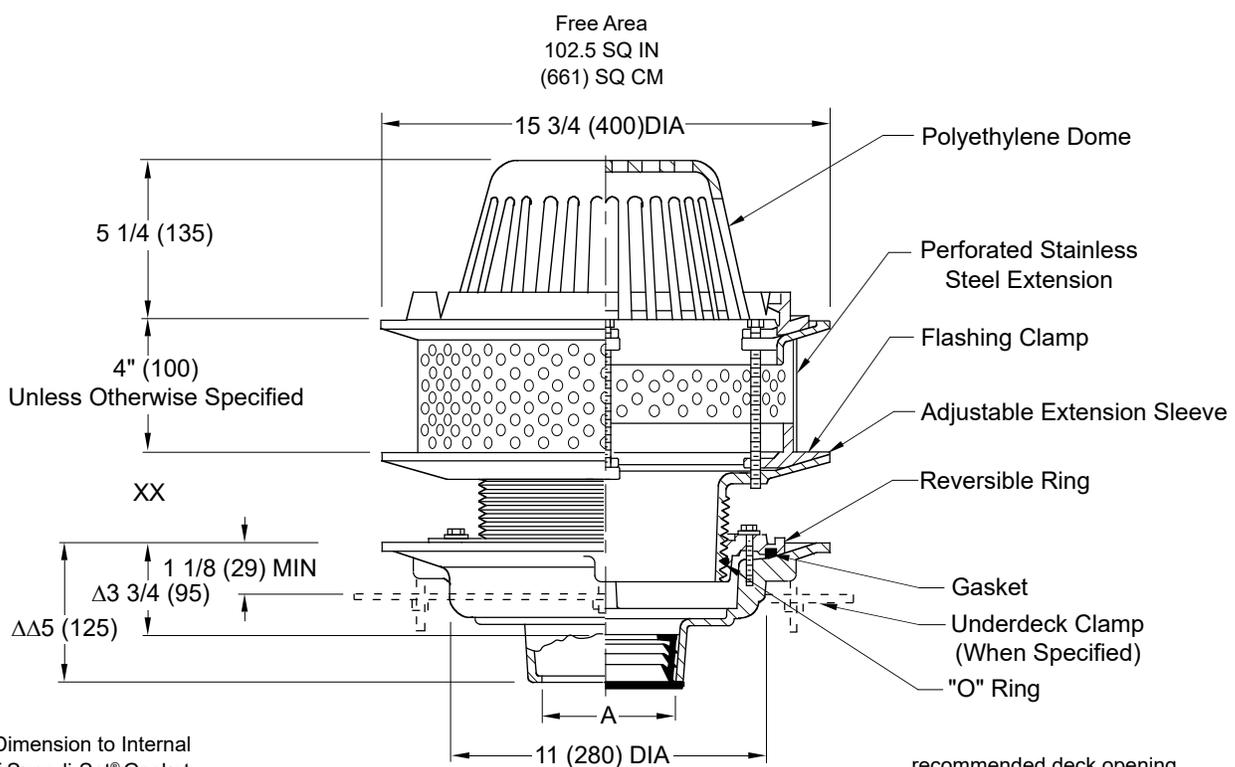

ΔThis Dimension to Internal Stop of Speedi-Set® Gasket.  
 ΔΔSame for caulk, NO-HUB and Speedi-Set®, 3 3/4 (95) for Threaded.  
**NOTE:** Dimensions shown in parentheses are in millimeters.

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

Fig. 1037C . . . CAULK OUTLET  
 Fig. 1037Y . . . NO-HUB OUTLET

recommended deck opening	
with suffix -R	17 (430) DIA
less suffix -R	14 (355) DIA

	XX	MIN	MAX
Low Position	1 1/4 (32)	2 1/2 (64)	
High Position	2 1/4 (57)	4 (100)	

**REGULARLY FURNISHED:**  
 Duco Cast Iron Body with Adjustable Extension Sleeve, Perforated Stainless Steel Extension, Combined Flashing Clamp and Gravel Stop, and Polyethylene Dome

- VARIATIONS:**
- Expansion Joint (Specify Fig. 1710) (Fig. 1010 only)
  - Higher Gravel Stop (Specify Height) -HGS
  - "L" Shaped Underdeck Clamp -CL
  - L Speedi-Set® Service Weight  
02(50), 03(80), and 04"(100) sizes only (Fig. 1010 only)
  - LXH Speedi-Set® Extra Heavy  
02(50), 03(80), and 04"(100) sizes only (Fig. 1010 only)
  - Sump Receiver -R
  - Underdeck Clamp -C
  - Vandal Proof Dome -U
  - T Threaded Outlet
  - Solid Extension

- OPTIONAL MATERIALS:**
- ▲  Aluminum Dome -AD
  - ▲  Cast Iron Dome -CID
  - ▲  Galvanized Cast Iron -G
  - ▲  Rough Bronze Dome -RBD

▲Optional domes' free area are as follows:  
 Aluminum 98 (632)  
 Cast Iron 80 (516)  
 Bronze 95 (613)

REV.	DATE	DESCRIPTION	BY	CKD. BY
J	9-27-23	Removed Function	HS	CL
H	3-8-23	Added @ to "Speedi-Set"	KK	CL
T	7-30-19	Removed NOTE	MW	CL
	9-17-15	Added Flow Rate Note	TBW	BW

WEIGHT POUNDS	VOLUME CUBIC FEET
------------------	----------------------

**FIGURE NUMBER**  
**1037**