

K

**SMITH® JAY R. SMITH MFG. CO.®**  
 MEMBER OF MORRIS GROUP INTERNATIONAL  
 POST OFFICE BOX 3237  
 MONTGOMERY, ALABAMA 36109-0237 (USA)  
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



LOCATION

DRAWING NUMBER  
S1357

SIZE  
A

SCALE:  
NONE

DATE:  
2-2-82

APPROVED BY:  
JM

CHECKED BY:  
JM

DRAWN BY:  
KG

1357


FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

# ROOF DRAIN

## FOR INSULATED "BUILT-UP" MEMBRANE ROOFS

Free Area  
 41.5 SQ IN  
 (268) SQ CM

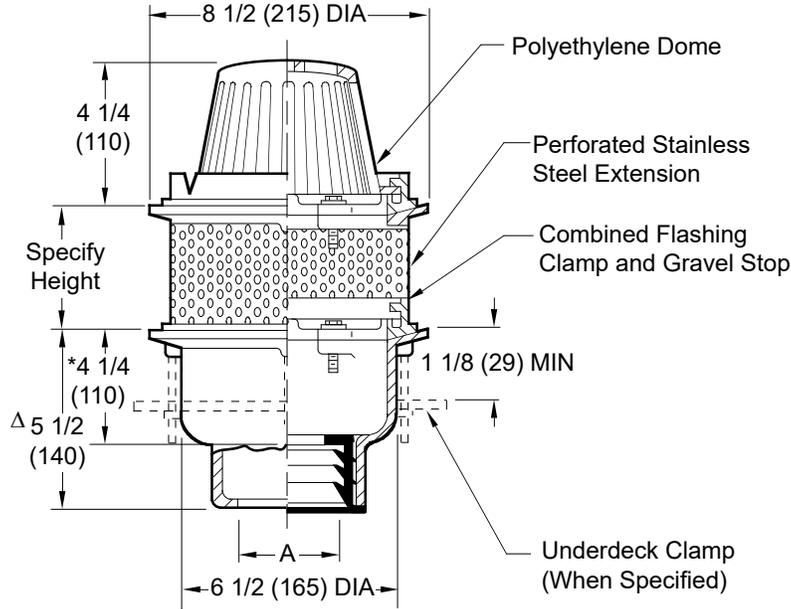

- Fig. 1357C . . . . . CAULK OUTLET
- Fig. 1357Y . . . . . NO-HUB OUTLET

A (Pipe Size) = 02(50), 03(75) or 04(100)

recommended deck opening

with suffix -R	9(230) DIA
less suffix -R	7 3/4(195) DIA

\*This Dimension to Internal Stop of Speedi-Set® Gasket.  
 Δ Same for Caulk, NO-HUB and Speedi-Set®, 4 1/4(110) for Threaded.

### REGULARLY FURNISHED:

Duco Cast Iron Body with Combined Flashing Clamp, Perforated Stainless Steel Extension and Gravel Stop with Polyethylene Dome.

### VARIATIONS:

- Expansion Joint (Specify Fig. 1710)
- 2"(51) High Water Dam -WD
- "L" Shaped Underdeck Clamp -CL
- L Speedi-Set® Service Weight
- LXH Speedi-Set® Extra Heavy
- Sump Receiver -R
- Underdeck Clamp -C
- Vandal Proof Dome -U
- T Threaded Outlet

### OPTIONAL MATERIALS:

- Aluminum Dome -AD
- Cast Iron Dome -CID
- Galvanized Cast Iron -G
- Rough Bronze Dome -RBD

NOTE: Dimensions shown in parentheses are in millimeters.

K	9-28-23	Removed Function	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER <b>1357</b>
J	3-8-23	Added @ to "Speedi-Set"	KK	CL			
H	7-30-19	Removed NOTE	MW	CL			
G	11-13-15	Added Flow Rate Note	TBW	BW			
REV.	DATE	DESCRIPTION	BY	CKD. BY			