

## HWS Wash Fountain (Corner Unit)



**Model Shown: 8984-3C**

Satin Finish Stainless Steel Three Station Corner Wash Fountain

- **Wall Mounted Corner Wash Fountain**
- **Heavy 16-Gage Stainless Steel Construction**
- **Satin Finish (Entire Unit) is Standard**  
Optional Finishes include White Gloss and Black Matte Powdercoat
- **Three-Station Configuration**
- **Sensor Operated Vandal-Resistant Spray Nozzles**
- **Thermostatic Mixing Valve is supplied**
- **Codes/Standards Applicable - ANSI, ADA, & UFAS**
- **Greenguard Gold Certified For Low Emissions**

| DESCRIPTION   | MODEL/OPTION #   |
|---|--|
| <b>FINISH</b> - Required Selection  |  |
| <b>INIT.</b>  |  |
| <b>WALL MOUNTED THREE-STATION CORNER WASH FOUNTAIN</b>                            |  |
| <input type="checkbox"/> <b>Satin Finish</b> (standard)                           | 8984-3C  |
| <input type="checkbox"/> <b>White Gloss Powdercoat</b>                            | 8984-3C-EG10   |
| <input type="checkbox"/> <b>Black Matte Powdercoat</b>                            | 8984-3C-EG22   |
| <b>OPTIONS</b>  |  |
| <b>INIT.</b>  |  |
|  | <input type="checkbox"/> <b>Liquid/Lotion Soap Dispenser</b> -DV |
| <b>APPROVAL FOR MANUFACTURE</b>   |  |
| COMPANY: _____  |  |
| PROJECT NAME: _____   |  |
| SIGNEE'S NAME WRITTEN CLEARLY: _____  |  |
| DATE _____  |  |
| AUTHORIZED SIGNATURE: _____   |  |

Stainless Steel Wash Fountain is Recyclable



**⚠** WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**NEO-METRO® by ACORN®**

A Member of Morris Group International

## HWS Wash Fountain (Corner Unit)

### Product Specification...

**Bowl and Sprayhead** are type 304 Satin Finish stainless steel. Bowl is 37" wide, and has an integral backsplash and sprayhead. Heavy-duty S-clips securely anchor the backsplash to the wall. Sprayhead is 15" diameter x 5-1/4" high.

**Contoured Housing** is fabricated of 16 gage, type 304 Satin Finish stainless steel. One piece housing and flush mounted access cover allow for easier installation and servicing of unit.

 **ADA Compliance.** Units with rim height of 34" conform to ANSI, UFAS and ADA requirements for accessibility. Compliance is subject to the interpretation and requirements of the local code authority.

**Soap/Toiletary Tray** on top of sprayhead is standard. There are additional self-draining, air-circulating soap dishes on each side of the bowl.

**Sectional Control** is standard. One sensor actuates one station. The corner unit is only available with three stations..

**Electronic Sensor Operation** includes individual solenoid valves activated by infrared sensors. A low voltage transformer is provided.



**Spray Nozzles** are vandal-resistant and provide a concentrated 0.5 GPM spray at each station.

**Hot & Cold Supplies** are blended in a thermostatic mixing valve furnished with checkstops, strainers and flexible supply connections. A minimum of 30 PSI supply pressure is required.

**Waste Connection** is a 1-1/2" OD x 4" tailpiece.

**-DV** Pump Type Soap Dispenser is available for liquid or lotion type soaps. Dispensers are mounted below the sprayhead with a easily refillable concealed reservoir.

**-HTR** Electric Instantaneous Water Heater is available. The heater is place in the trap cover. (Additional specification are required)

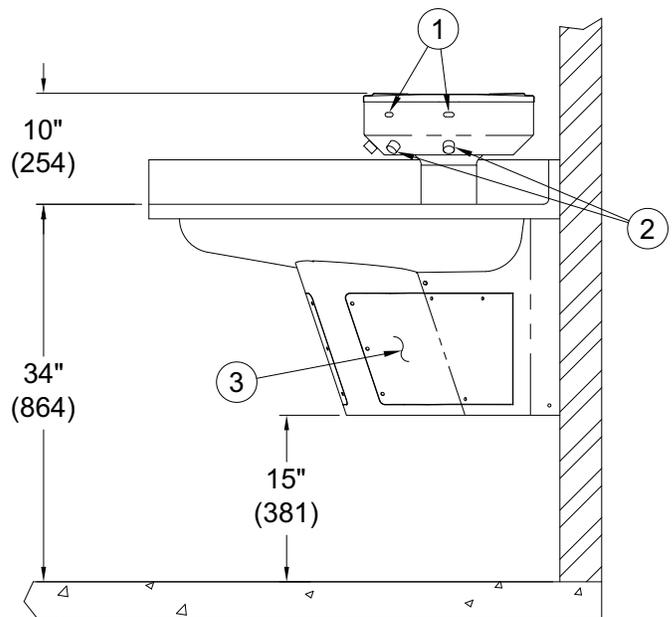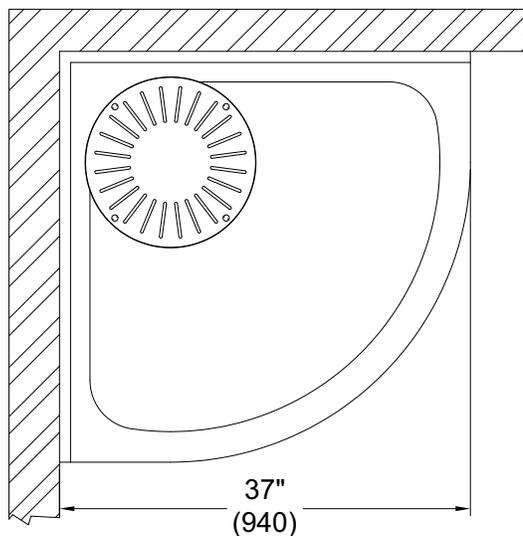

**NOTES:**

1. Sensor Eye

2. Spray Nozzle

3. Hinged Access Panel

Neo-Metro assumes no responsibility for use of void or suspended data. All dimensions are nominal and subject to manufacturer change without notice.

**INSTALLATION INSTRUCTIONS ARE AVAILABLE**