

springH2O[®]
BOTTLE FILLERS BY MURDOCK[®]

BF15S Bottle Filler

PUSHBUTTON OPERATED VANDAL RESISTANT
WALL MOUNTED STAINLESS STEEL
BOTTLE FILLER

STANDARD FEATURES

- Heavy Gauge Type 304 Stainless Steel Construction
- Vandal Resistant Seamless Stainless Steel Alcove
- ADA Compliant
- Pushbutton Operation
- Laminar Flow Nozzle 1.2 GPM (4.54 l/min) at 70 PSI
- Fold Down Housing for Easy Maintenance Access
- Lead-Free

SUGGESTED SPECIFICATIONS

Pushbutton Operated, Vandal Resistant, Stainless Steel, Wall Mounted Bottle Filler shall be Murdock[®] model BF15S. Bottle Filling unit shall include Pushbutton Operated activation. Bottle Filler shall provide 1.2 GPM (4.54 l/min) flow rate with a Laminar Flow Spout to minimize splashing. When installed properly, the Bottle Filler complies with ADA forward and side reach requirements. Bottle Filler Housing construction to be heavy gauge, type 304 stainless steel with exposed surfaces polished to a #4 satin finish. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately. Optional WF3000 PFAS Water Filter shall have 3000 gallon capacity with 3rd Party Certification for Lead, Bacteria, Chlorine, Microplastics, and NSF/ANSI for Cyst and total PFAS reduction.

ADA Compliant when installed correctly. Refer to 2010 ADA Standards for Accessible Design for complete Installation Requirements particularly if located on an Accessible Route or Circulation Path. Compliance is subject to the Interpretation and Requirements of the Local Code Authority.



Model BF15S Shown

U.S. Patent D1,062,348 S

"RATED FOR INDOOR OR OUTDOOR USE"

Refer to Installation instructions for complete details.

MODEL:

- BF15S Pushbutton Operated Stainless Steel Wall Mount Bottle Filler

OPTIONS: (Additional costs may apply)

- EG22 Enviro-Glaze[®] Matte Black Powder Coat

ACCESSORIES: (Additional costs may be incurred)

- LOGO Customer Specified Logo / Graphics
- WF3000 3000-gallon PFAS Water Filter ¹
NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics
- A9100080-A 8 GPH Remote Water Chiller ¹
(Recommended to be within 10 Feet of Fixture)

NOTES:

1 - Refer to Supplemental Submittal Sheet for Complete Details.

Complies with the following standards:



Federal Public Law 111-380 (No Lead)



NSF/ANSI/CAN 61

NSF/ANSI/CAN 61: Q ≤ 1


NSF/ANSI/CAN 61 Compliant including lower lead leaching criteria.

[3000 Gallon PFAS Filter Certifications](#)

[Product Warranty](#)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

BF15S Bottle Filler
PUSHBUTTON OPERATED VANDAL RESISTANT
WALL MOUNTED STAINLESS STEEL
BOTTLE FILLER

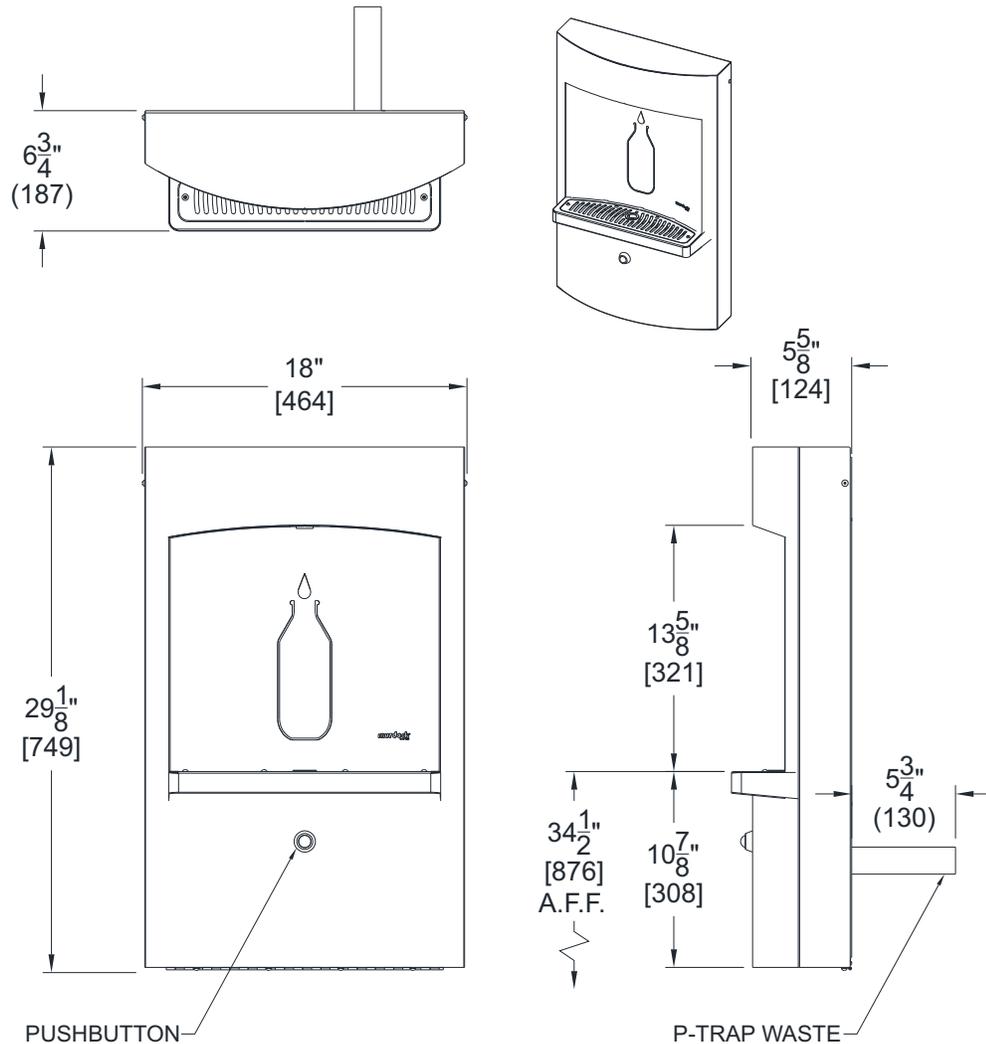

1. DIMENSIONS SHOWN AS INCHES [MM].

IMPORTANT: Dimensions are shown for reference only. Refer to product Installation Manual for complete details prior to Rough-in.

SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock[®] assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock[®] Mfg., Member of Morris Group International[®]. Please visit www.murdockmfg.com for most current specifications.