

H

SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



LOCATION

DRAWING NUMBER
S9340

SIZE
A

SCALE:
NONE

DATE:
11-12-84

APPROVED BY:
TD


CHECKED BY:
VGD

DRAWN BY:
PJ

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

DRAIN FOR FLOATING (ISOLATED) FLOOR SYSTEMS

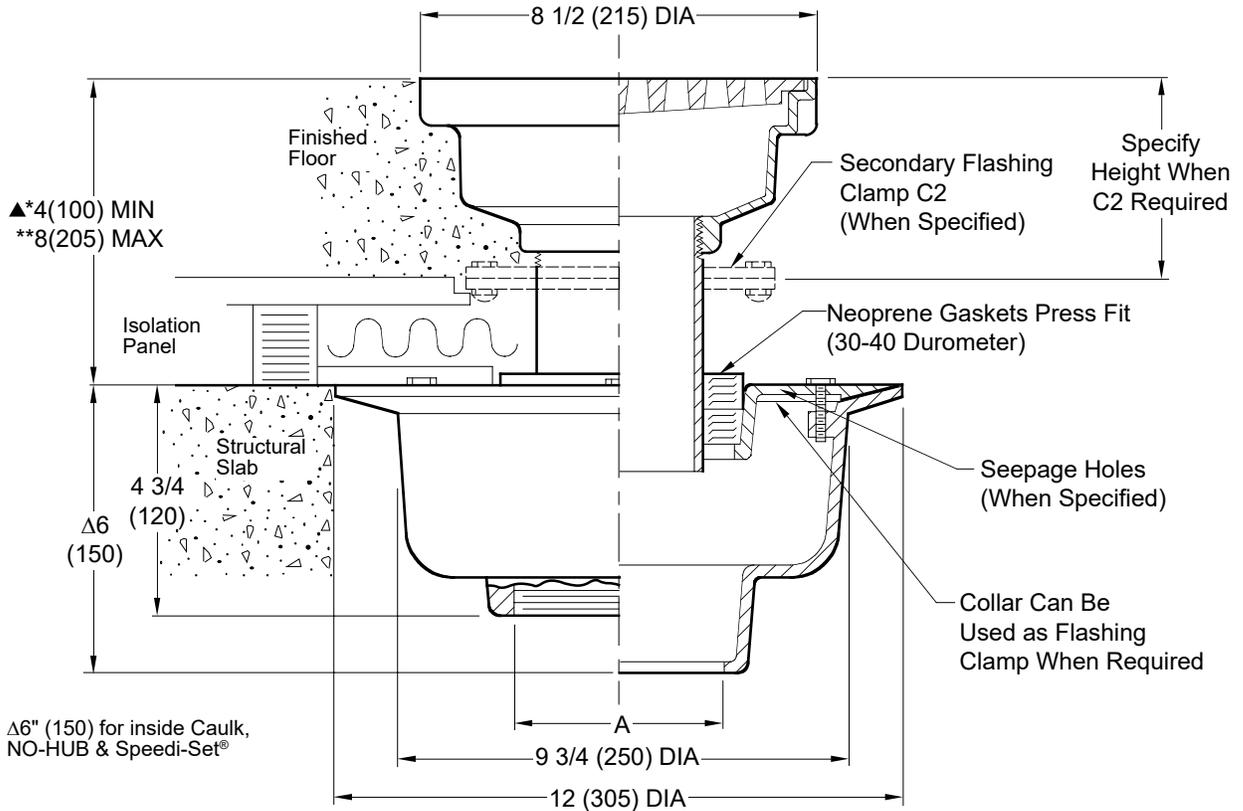

NOTE: *Add 1/4" (6) for Nickel Bronze or Polished Bronze Top.
 **If greater dimension than shown from lower flange to top is required specify a longer nipple.
 ▲ Nipple may require cutting to achieve minimum dimension.

A (Pipe Size) = 02(50), 03(75), 04(100)

- Fig. 9340C . . . CAULK OUTLET
- Fig. 9340T . . . THREADED OUTLET
- Fig. 9340Y . . . NO-HUB OUTLET

REGULARLY FURNISHED:

Duco Cast Iron Lower Body and Flashing Collar, Adjustable Nipple, Upper Body, Grate and Neoprene Isolation Gaskets.

VARIATIONS:

- Safe-Set Sediment Bucket -B (Fig. 9341)
- Secondary Flashing Clamp -C2
- Seepage Holes (in collar) -WSH
- Sump Receiver Plate -R
- Underdeck Clamp -C
- L Speedi-Set® Service Weight
02(50), 03(75) & 04"(100) sizes only
- LXH Speedi-Set® Extra Heavy
02(50), 03(75) & 04"(100) sizes only
- Vandal Proof Grate -U
- Tractor Grate -TG

OPTIONAL MATERIALS:

- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB
- Ductile Iron Grate -M

NOTE: Dimensions shown in parentheses are in millimeters.

9340

FIGURE NUMBER

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
	11-15-23 3-16-23 05/31/00 5-15-00	Removed Function Revised Var., Opt. Mat., & Added ® Changed Metric Equivalents Added note	HS KK JJ SA	CL CL BS BS			9340