


**PROMENADE DECK DRAIN FOR INSULATED ROOF DECKS**

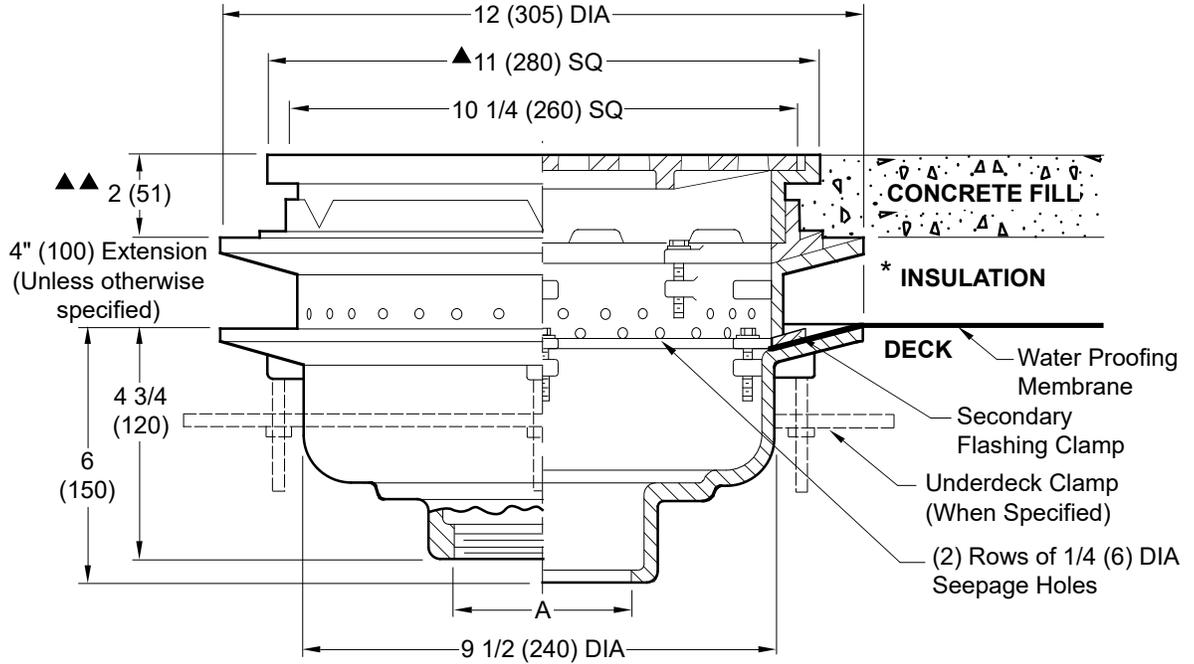

A (Pipe Size) = 02(50),03(75),04(100),05(125) & 06(150)

- Fig. 1459C ..... CAULK OUTLET
- Fig. 1459Y ..... NO-HUB OUTLET
- Fig. 1459T ..... THREADED OUTLET

- ▲ Add 1/4"(6) when bronze top is specified.
- ▲▲ Add 1/8"(3) when bronze top is specified.

recommended deck opening	
with suffix -R	13 (330) DIA
less suffix -R	11 (280) DIA

**REGULARLY FURNISHED:**  
 Duco Cast Iron Body and 4" (100) Extension with Secondary Flashing Clamp and Seepage Openings with Secured Square Hole ADA Grate.

- VARIATIONS:**
- Expansion Joint (Specify Fig. 1710)
  - Extension (Specify Height) -E
  - "L" Shaped Underdeck Clamp -CL
  - L Speedi-Set® Service Weight  
02(50), 03(75) & 04"(100) sizes only
  - LXH Speedi-Set® Extra Heavy  
02(50), 03(75) & 04"(100) sizes only
  - Sump Receiver -R
  - Underdeck Clamp -C
  - Vandal Proof Grate -U
  - S.S. Perforated Extension
  - Roof Deck Plate -RDP
  - Heel Proof Grate -HP

- OPTIONAL MATERIALS:**
- Ductile Iron Grate -M
  - Galvanized Cast Iron -G
  - Nickel Bronze Top -NB
  - Polished Bronze Top -PB

\* On some systems this layer includes a layer of pea gravel and a layer of insulation.

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S1459  
 SIZE A  
 SCALE: NONE  
 DATE: 2-2-82  
 APPROVED BY: JM  
 CHECKED BY: JM  
 DRAWN BY: KG  
 FIGURE NUMBER 1459  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE  
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
	4-1-24 3-8-23 1-19-23 7-21-21	Revised Variations Added @ to "Speedi-Set" Updated Reg. Furnished Added Fig. # 1459T	HS KK KK KK	CL CL CL CL			<b>1459</b>