

F



JAY R. SMITH MFG. CO.
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



MEMBER OF:

LOCATION


DRAWING NUMBER
SDX1080SIZE
ASCALE:
NONEDATE:
2-2-87APPROVED BY:
JDCHECKED BY:
VGDDRAWN BY:
WAS

DX1080

FIGURE
NUMBERWE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

SPECIAL PURPOSE ROOF DRAINS

WATER COLLAR TYPE

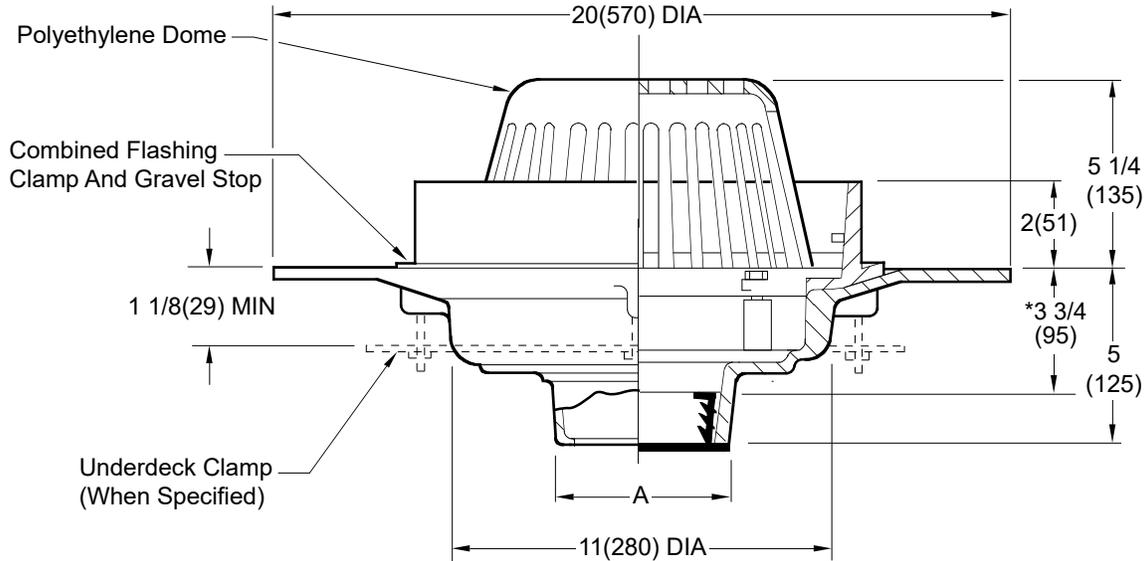

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125), 06(150) or 08(200)

*This dimension to internal stop of Speedi-Set® Gasket

Fig. DX1080C CAULK OUTLET
 Fig. DX1080Y NO-HUB OUTLET

REGULARLY FURNISHED:

Duco Cast Iron Body with Wide Flange, Combined Flashing Clamp and Water Dam with Polyethylene Dome.

VARIATIONS:

- Expansion Joint (Specify Fig. 1710)
- Extension (Specify Height) -E
- "L" Shaped Underdeck Clamp -CL
- 2 1/2(64), 3(75) or 4"(100) Water Dams Available -WDL
- Speedi-Set® Service Weight 02(50), 03(75) & 04"(100) sizes only
- LXH Speedi-Set® Extra Heavy 02(50), 03(75) & 04"(100) sizes only
- Secondary Flashing Clamp -C2
- Underdeck Clamp -C

OPTIONAL MATERIALS:

- ▲ Aluminum Dome -AD
- ▲ Cast Iron Dome -CID
- ▲ Galvanized Cast Iron -G
- ▲ Rough Bronze Dome -RBD

▲ Optional domes' free area are as follows:

Aluminum 98 (632)
 Cast Iron 80 (516)
 Bronze 95 (613)

NOTE: Recommended deck opening 14 3/4"(375)

NOTE: Dimensions shown in parentheses are in millimeters

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
F	9-29-23	Removed Function	HS	CL			DX1080
E	3-9-23	Added @ to "Speedi-Set"	KK	CL			
D	7-30-19	Removed NOTE	MW	CL			
C	12-16-15	Added Flow Rate Note	TBW	BW			



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov