



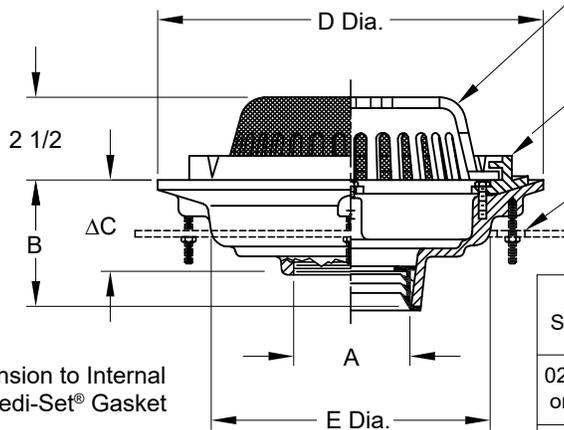

LOCATION

# SPECIAL PURPOSE ROOF DRAIN

## LOW PROFILE DOME

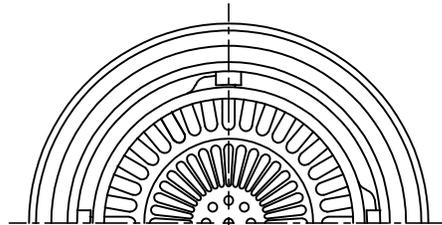

Cast Iron Low Dome with Stainless Steel Mesh Dome Cover

Combined Flashing Clamp and Gravel Stop

Underdeck Clamp (When Specified)

Δ This Dimension to Internal Stop of Speedi-Set® Gasket

A SIZE	B CAULK, NO-HUB, & SPEEDI-SET®	THREADED	C	D DIA.	E DIA.	FREE AREA SQ. IN.
02, 03 or 04	5	3 3/4	3 3/4	15 1/4	11	40
05 or 06	5	3 3/4	3 3/4	15 1/4	11	40

- Fig. 1010C(-LPDM) . . . . . CAULK OUTLET
- Fig. 1010Y(-LPDM) . . . . . NO-HUB OUTLET
- Fig. 1010T(-LPDM) . . . . . THREADED OUTLET

**REGULARLY FURNISHED:**

Duco Cast Iron Body, Combined Flashing Clamp and Gravel Stop with Cast Iron 2 1/2" High Low Profile Dome with Stainless Steel Mesh Dome Cover.

**VARIATIONS:**

- L Speedi-Set® Service Weight Outlet Conn. (02, 03, & 04 Sizes Only)
- LXH Speedi-Set® Extra Heavy Duty Outlet Conn. (02, 03, & 04 Sizes Only)
- Sump Receiver -R
- Underdeck Clamp -C
- Vandal Proof Dome -U
- Extension (Specify Height) -E
- Secondary Flashing Clamp -C2
- Adjustable Extension -AE
- Roof Deck Plate -RDP

**OPTIONAL MATERIALS:**

- Galvanized Cast Iron Body and Collar -G
- Galvanized Cast Iron Dome -CIDG

DRAWING NUMBER  
s1010-LPDM

SIZE  
A

SCALE:  
NONE

DATE:  
11-3-21

APPROVED BY:  
CR

CHECKED BY:  
CR

DRAWN BY:  
KK

**1010-LPDM**

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

FIGURE NUMBER	C B A	3-25-24 9-27-23 2-23-23	Revised Variations, Fig. Opts. Removed Function Added @ to "Speedi-Set"	HS HS KK	CL CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER <b>1010-LPDM</b>
REV.	DATE	DESCRIPTION	BY	CKD. BY				