



## Corterra™ Shower Base Shower Base Fixtures



CSBS-36-3F

Fixture May Show Some Available Options

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

## Corterra™ Shower Base Fixtures

**Shower Base** is an attractive, easy to maintain, spacious shower receptacle with non-slip, Matte finish floor. Shower Base is cUPC certified by IAPMO R&T and complies to ASTM F 462-79 (R-2007) entitled, "Standard Consumer Safety Specification for Slip-Resistant Bathing Facilities". It is designed for durability and ease of installation. **ACORN CORTERRA™** shower bases provide flexibility in configuration and size as required by the design of the building and the specific installation. Custom sizes and colors are also available.

**Integral Threshold** provides an attractive entry into the shower. The 3" wide threshold allows installation of a shower door. The three non-threshold sides have integral tiling flanges which extend above the base shoulders.

**ADA Shower Bases** shall have an open entry for wheelchair accessibility for both 36" seat type shower stall and 30" x 60" roll-in type stalls. Shower bases are intended to be recessed flush with the finished floor. A floor drain, provided by others, is recommended near the shower entrance.

**Construction** shall be of Corterra™ cast polyester resin with integral tiling flanges.

**Drain** includes a removable trough style grate that is secured by phillips screws. Drain also includes a 2" no-caulk shower drain. The shower base has coved corners and is pitched to the drain outlet to provide positive drainage.

### GUIDE SPECIFICATION

Provide and install an **ACORN Corterra™ Shower Base** (specify model number and options). Shower Base shall be made of Corterra™ cast polyester resin with a Matte finish floor. No air holes or pits shall be allowed on the finished surface. Base shall have coved corners and be pitched to the drain outlet for positive drainage. Drain shall have a removable stainless steel strainer and provide for an inside caulked connection to a 2" pipe. Shower Base shall be cUPC certified and meet ASTM F 462-79 (R-2007) requirements. The manufacturer will provide to the installer the necessary installation instruction.

# Corterra™: Shower Base Series



## BASE MODEL


### TYPE & SIZE (Must Specify)

- CSBS-36-3F** 36" Corterra™ Shower Base, Square
- CSBS-42-3F** 42" Corterra™ Shower Base, Square
- CSBR-4234-3F** 42" x 34" Corterra™ Shower Base, Rectangle
- CSBADA-36-3F** 36" ADA Corterra™ Shower Base, Square
- CSBRADA-6030-3F** 60" x 30" ADA Corterra™ Shower Base, Rectangular Roll-In Type

## SUFFIX OPTIONS

- AMA Anti-Microbial Additive
- OCC Optional Corterra™ Colors, Specify \_\_\_\_\_

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

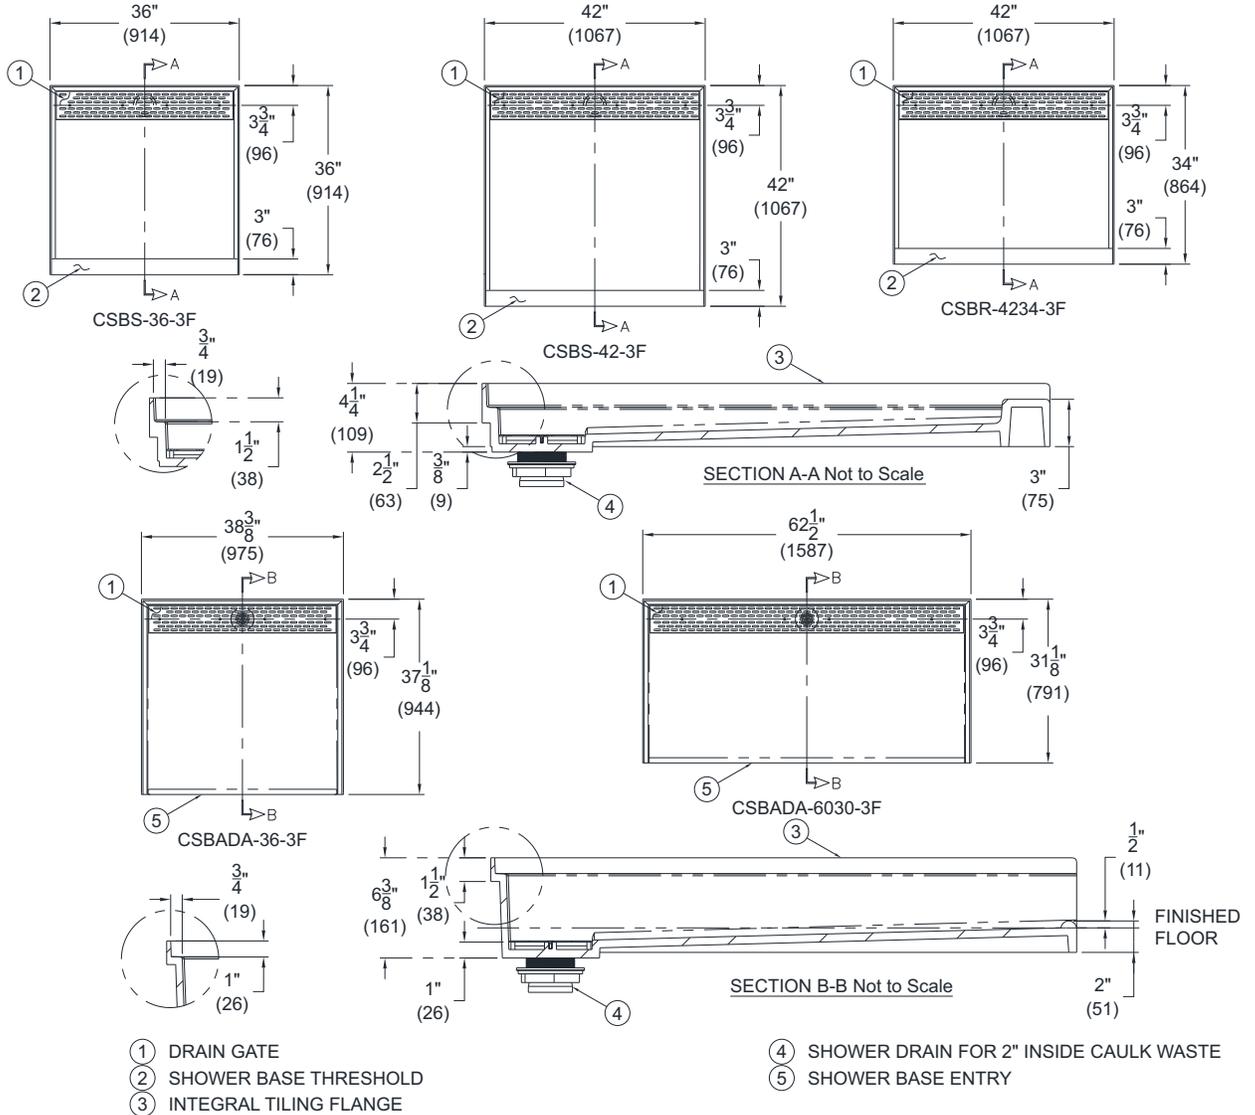

SHOWER BASE TO BE RECESSED.  
CHECK LOCAL AUTHORITY FOR CODE AND  
INSTALLATION REQUIREMENTS.

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**Important:** Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions.  
Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2003 Acorn Engineering Company

<p style="text-align: center;">Selection Summary</p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>
--	--