



Whitehall Ligature Resistant Sensor Operated Faucet

Model WH3376-WSF-SO
 & WH3376-WSF-SO-BAT



U.S. DESIGN PATENT D704,8065

WH3376-WSF-SO

Fixture May Show Some Available Options

Ligature Resistant Sensor Operated Faucet

The Ligature Resistant Sensor Operated Faucet is designed and developed to retrofit existing lavatories or it can be specified for new design on decks with a thickness of 1-1/4" maximum. The Ligature Resistant Faucet is arranged to be mounted to the deck of the lavatory. Faucet assembly requires (3) 1-5/16" to 1-1/2" diameter holes on 6" or 8" centerset. Conical Faucet body is chrome plated brass, includes a multi-stream, non-aerated spray nozzle insert and provides vandal and Ligature Resistance. Includes a 0.35 GPM vandal resistant flow nozzle.

Valve is a electronic valve with sensor operation. Valve includes 9VDC Sensor that will keep the solenoid open, allowing water to flow until the object is removed from sensor range. If an object is positioned in a manner that it is under constant detection the sensor will turn off the solenoid after 20 seconds. A 120VAC/9VDC plug-in transformer or a 6 AAA Battery Pack provided. Batteries are not included.

Auto-Purge Sensor function is provided to ensure fresh water supply for hand washing by activating Faucet for 10 second duration 24 hours after last activation (standard Factory setting). Optional -AP Remote Controller also allows for additional Purge Cycle and Sensor range adjustments ([LINK](#)).

Optional -WHST70-12 Mixing Valve is ASSE 1070 compliant and delivers tempered water flow by compensating for pressure and temperature fluctuations. Valve is to be field set to 105 Fahrenheit and includes strainers and integral checks. Operating range is 30 to 100 psi.

Fixture is ADA Compliant. Unit conforms with ADA requirements for accessibility when installed correctly. Compliance is subject to the interpretation and requirements of the local code authority.

(Note: Nozzle with a 0.5 GPM Flow may be Purchased Separately using PN 2998-110-000; Not intended for use with Whitehall® Basins due to incompatible Spray Arc.)

GUIDE SPECIFICATION

Provide and install Ligature Resistant Faucet Components (specify model number and options). Faucet valve shall be electronic, sensor operation. Assembly shall include 0.35 GPM flow control, 9VDC sensor and faucet connections.



Please visit www.whitehallmfg.com for most current specifications.



Recyclable Product



Water Conserving Product

Complies with the following standards:



Federal Public Law 111-380 (No Lead)




MODEL NUMBER AND OPTIONS SELECTION:

BASE MODEL NUMBER

- WH3376-WSF-SO Ligature Resistant Sensor Operated Faucet w/ Electronic Valve, Single Temp
- WH3376-WSF-SO-BAT Ligature Resistant Battery Powered Sensor Operated Faucet w/ Electronic Valve, Single Temp (Batteries not included)

OPTIONS:

- AP Auto-Purge Sensor Function Remote Controller [\(LINK\)](#)
- WHST70-12 ASSE 1070 Compliant Hot & Cold, Temperature / Pressure Balancing Mixing Valve

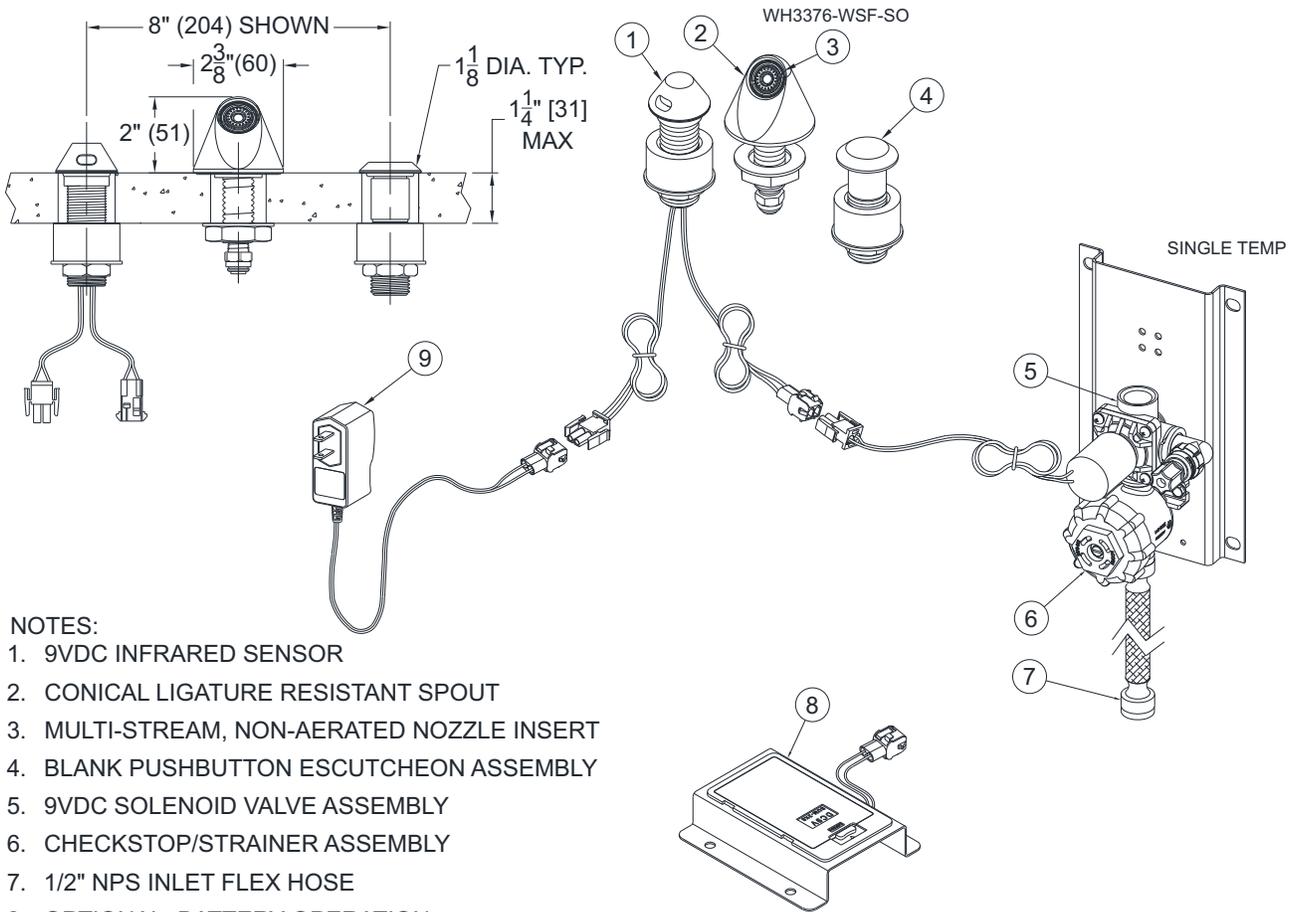

NOTES:

1. 9VDC INFRARED SENSOR
2. CONICAL LIGATURE RESISTANT SPOUT
3. MULTI-STREAM, NON-AERATED NOZZLE INSERT
4. BLANK PUSHBUTTON ESCUTCHEON ASSEMBLY
5. 9VDC SOLENOID VALVE ASSEMBLY
6. CHECKSTOP/STRAINER ASSEMBLY
7. 1/2" NPS INLET FLEX HOSE
8. OPTIONAL -BATTERY OPERATION INCLUDES BATTERY PACK AND BRACKET
9. 9VDC PLUG-IN TRANSFORMER

**OPTIONAL -BAT BATTERY
 OPERATION DETAIL**
 (Batteries not included)

DISCLAIMER:

This product is designed to decrease the probability that it may be utilized as an apparatus for ligature. It is not a replacement for professionals who are trained in the proper evaluation, management and supervision of persons at risk of suicide.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
 Company _____ Date _____
 Contact _____ Title _____
 Approval for Manufacturing/Signature _____

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or superseded data. Whitehall Manufacturing, Member of Morris Group International. Please visit www.whitehallmfg.com for most current specifications.