


**GENERAL PURPOSE ROOF DRAIN**

**8 1/2" DIAMETER - LOW PROFILE DOME**

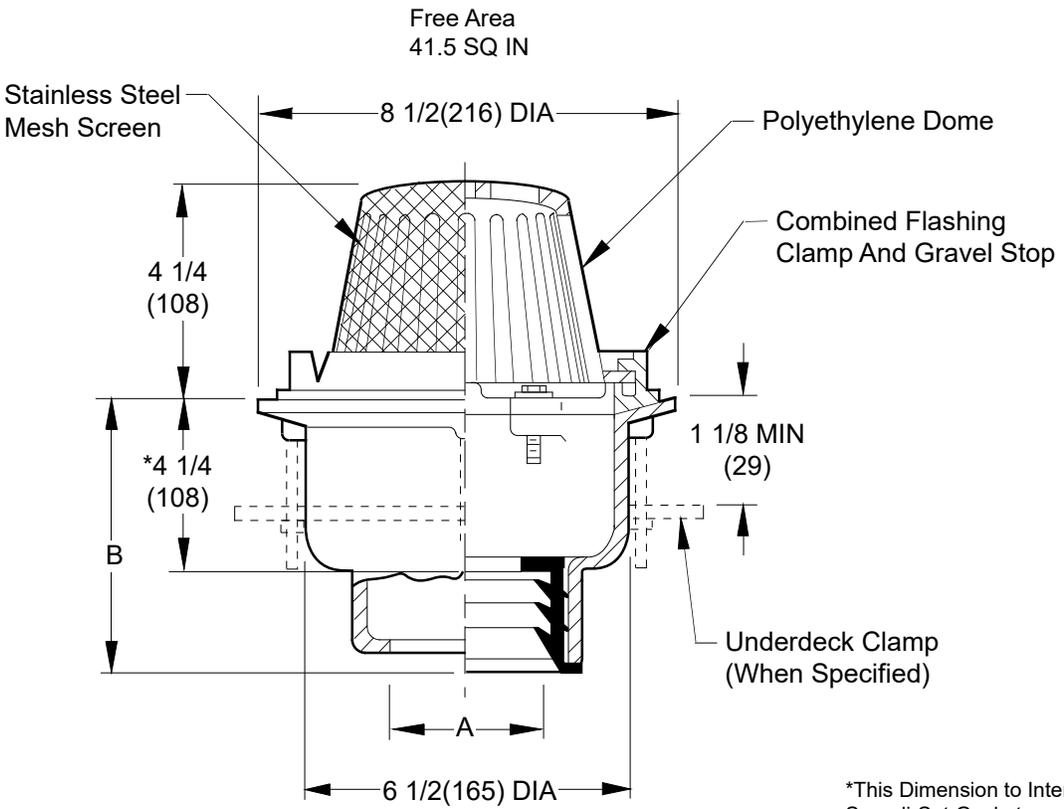

\*This Dimension to Internal Stop of Speedi-Set Gasket.

- Fig. 1330C. . . . .CAULK REGULAR
- Fig. 1330Y. . . . .NO-HUB

**REGULARLY FURNISHED:**  
 Duco Cast Iron Body with Combined Flashing Clamp and Gravel Stop with Polyethylene Dome with Stainless Steel Mesh Screen.

- VARIATIONS:**
- Underdeck Clamp -C
  - Secondary Flashing Clamp -C2
  - Extension (Specify Height)
  - Sump Receiver -R
  - Expansion Joint (Specify Fig. 1710)
  - 2" High Solid Water Dam
  - Vandal Proof Dome -U
  - L Speedi-Set Service Weight (2, 3 & 4" sizes only)
  - LXH Speedi-Set Extra Heavy (2, 3 & 4" sizes only)
  - T Threaded Outlet
  - C Inside Caulk Outlet
  - Y NO-HUB Outlet
  - "L" Shaped Underdeck Clamp -CL
  - Q SS Mesh Over Dome

- OPTIONAL MATERIALS:**
- Galvanized Cast Iron -G
  - Cast Iron Dome -CID
  - Rough Bronze Dome -RBD
  - Aluminum Dome -A

A SIZE	02	03	04
B	5 1/2 For Caulk, NO-HUB and Speedi-Set.		
	4 1/4 for Threaded.		

recommended deck opening	
with suffix -R	9 Dia.
less suffix -R	7 3/4 Dia.

DRAWING NUMBER  
**S1330-Q-Y-CAN**

SIZE  
**A**

SCALE:  
**NONE**

DATE:  
**3-18-93**

APPROVED BY:

CHECKED BY:

DRAWN BY:  
**CMB**

**1330-Q-Y-CAN**

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
B	10-12-23	Removed Function	HS	CL			<b>1330-Q-Y-CAN</b>
A	4-12-16	Removed AWS	TBW	TWK			