


FLOOR DRAINS
WITH 8 1/2" (215) ROUND TOPS AND SEDIMENT BUCKETS

"SAFE-SET®" BUCKET

Load Rating: Light Duty having a Safe Live (Static) Load less than 2,000 lbs. (900 kg) per ASME A112.6.3 Floor Drain Standard.
 For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

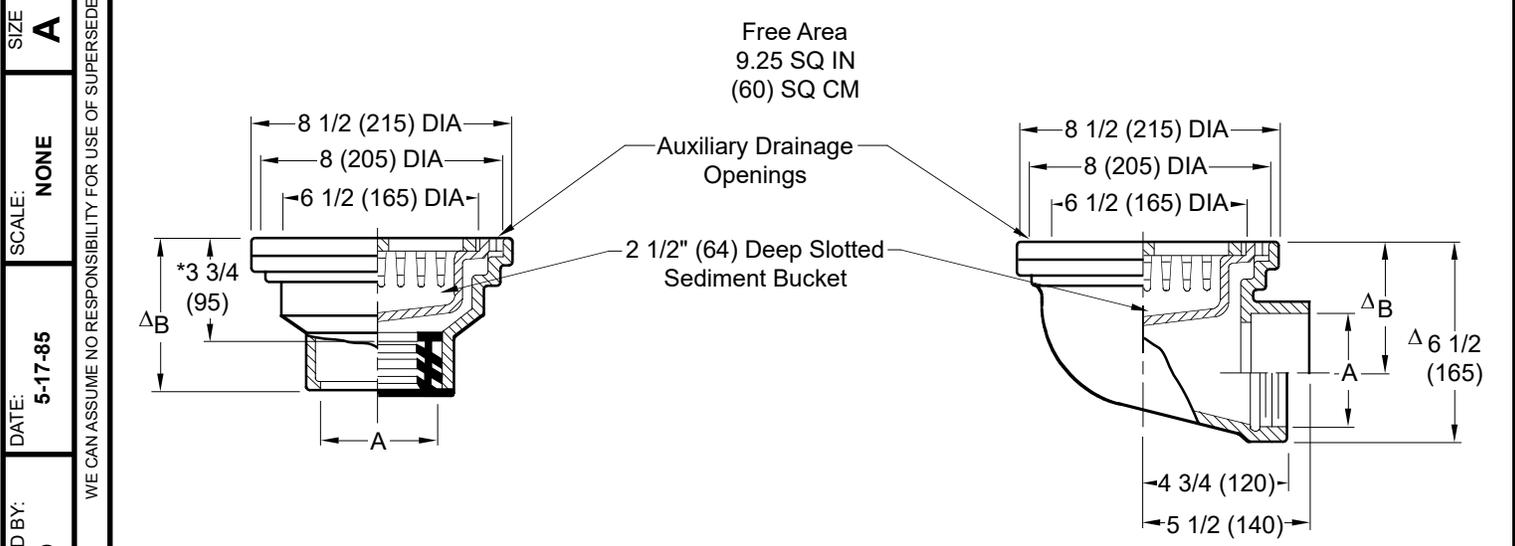

<input type="checkbox"/> Fig. 2210C. . . . CAULK OUTLET <input type="checkbox"/> Fig. 2210Y. . . . NO-HUB OUTLET	<input type="checkbox"/> Fig. 2215C. . . . CAULK OUTLET <input type="checkbox"/> Fig. 2215T. . . . THREADED OUTLET
---	---

A SIZE	02 (50)	03 (75)	04 (100)
B	5 (125) for Caulk, NO-HUB and Speedi-Set® 3 1/2 (89) for Threaded		

A SIZE	02 (50)	03 (75)	04 (100)
B	4 3/4 (120)	4 1/4 (110)	3 3/4 (95)

- | | | |
|---|--|---|
| <p>REGULARLY FURNISHED:
 Duco Cast Iron Body with Cast Iron ADA Grate and Sediment Bucket.</p> <p>*This Dimension to Internal Stop of Speedi-Set® Gasket.
 Δ Add 1/4" (6) when bronze top is specified</p> | <p>VARIATIONS:</p> <ul style="list-style-type: none"> <input type="checkbox"/> Dome Grate -D <input type="checkbox"/> Hinged Grate -H <input type="checkbox"/> L Speedi-Set® Service Weight (Fig. 2210 only) <input type="checkbox"/> LXH Speedi-Set® Extra Heavy (Fig. 2210 only) <input type="checkbox"/> NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2215 only) <input type="checkbox"/> Square Top -S <input type="checkbox"/> Trap Primer Connection -P050 1/2" (13) & -P075 3/4" (19) <input type="checkbox"/> Vandal Proof Grate -U <input type="checkbox"/> Wide Flange Deck Drain (Specify Fig. DX2565) <input type="checkbox"/> T Threaded Outlet <input type="checkbox"/> Quad Close Trap Seal (Specify Fig. 2692) (Fig. 2210 Only) | <p>OPTIONAL MATERIALS:</p> <ul style="list-style-type: none"> <input type="checkbox"/> Ductile Iron Bucket and Grate -MGB <input type="checkbox"/> Galvanized Cast Iron -G <input type="checkbox"/> Nickel Bronze Top -NB <input type="checkbox"/> Polished Bronze Top -PB |
|---|--|---|

NOTE: Dimensions shown in parentheses are in millimeters.

FIGURE NUMBER	2210, 2215	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>L</td><td>8-10-23</td><td rowspan="4">Removed Function Added "®" to "Speedi-Set" Added ADA Added Load Rating</td> <td>HS</td><td>CL</td> </tr> <tr> <td>K</td><td>2-23-23</td> <td>KK</td><td>CL</td> </tr> <tr> <td>J</td><td>1-23-23</td> <td>KK</td><td>JT</td> </tr> <tr> <td>H</td><td>7-22-19</td> <td>MW</td><td>JM</td> </tr> </table>	L	8-10-23	Removed Function Added "®" to "Speedi-Set" Added ADA Added Load Rating	HS	CL	K	2-23-23	KK	CL	J	1-23-23	KK	JT	H	7-22-19	MW	JM	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2210, 2215
L	8-10-23	Removed Function Added "®" to "Speedi-Set" Added ADA Added Load Rating	HS	CL																		
K	2-23-23		KK	CL																		
J	1-23-23		KK	JT																		
H	7-22-19		MW	JM																		
REV.	DATE	DESCRIPTION	BY	CKD. BY																		