

B DRAWING NUMBER SP500GT-CSA SER  
 SIZE A  
 SCALE: NONE  
 DATE: 8/8/16  
 APPROVED BY: SJM  
 CHECKED BY: JMC  
 DRAWN BY: TBW  
 FIGURE NUMBER P500GT-CSA SER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

# GREASE INTERCEPTOR

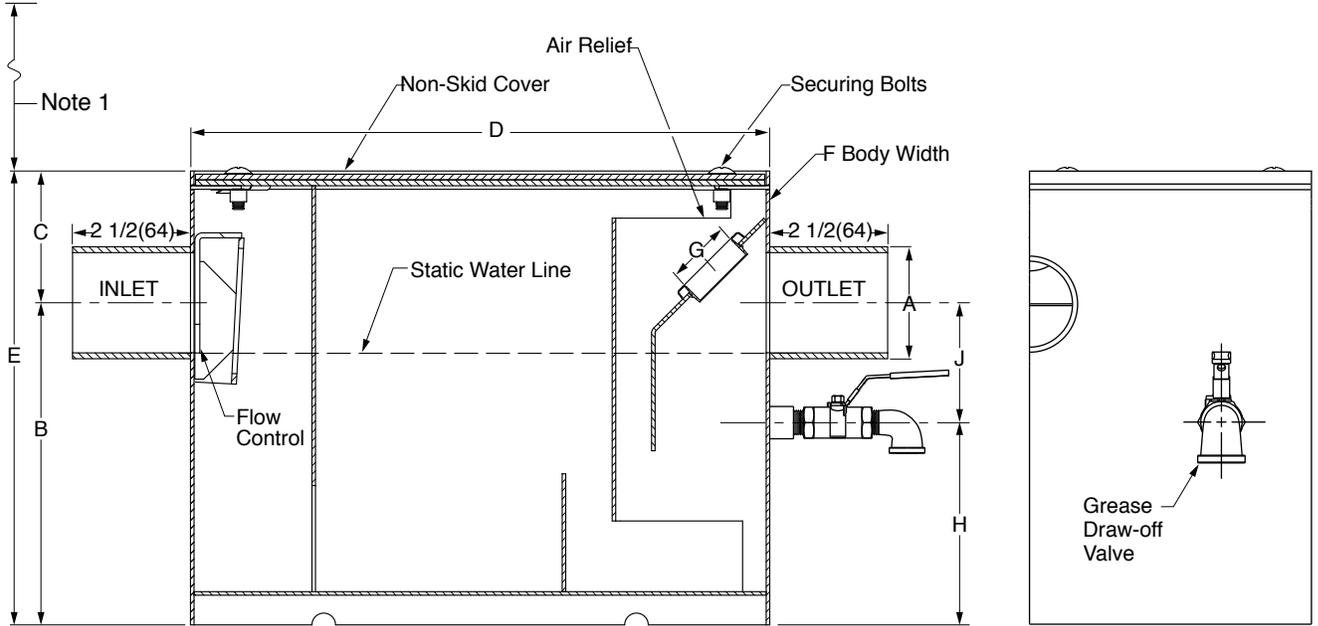


FIG. NO.	GPM FLOW RATE (L/M)	GREASE CAP LBS (KG)	A	B	C	D	E	F (WIDTH)	G (Plug Size)	H	J
P500GT-004	4(15)	8(3.6)	02(50)	6 7/8(175)	2 3/4(70)	12 1/4(311)	9 5/8(245)	13(330)	1 1/2(38)	4 7/8(124)	2(50)
P500GT-007	7(26)	14(6)	02(50)	7 3/4(195)	3 1/4(83)	13 5/8(346)	11(280)	14 1/2(368)	1 1/2(38)	5 3/4(146)	2(50)
P500GT-010	10(38)	20(9)	02(50)	8 3/4(220)	3 5/8(92)	15(381)	12 3/8(315)	15 3/4(400)	1 1/2(38)	6 1/4(159)	2 1/2(64)
P500GT-015	15(57)	30(13.6)	02(50)	11 1/4(285)	3 1/2(89)	17 3/8(441)	14 3/4(375)	18 1/4(464)	1 1/2(38)	8 3/4(220)	2 1/2(64)
P500GT-020	20(75)	40(18)	03(75)	12 3/4(325)	4(100)	19 3/8(492)	16 3/4(425)	20 1/4(514)	1 1/2(38)	9 3/4(250)	3(75)
P500GT-025	25(95)	50(22.6)	03(75)	14 1/4(360)	4 1/8(105)	21(533)	18 3/8(468)	21 3/4(552)	1 1/2(38)	11 1/4(285)	3(75)
P500GT-035	35(132)	70(32)	03(75)	14 1/2(370)	4 1/2(114)	22 3/8(568)	19(485)	23 1/4(591)	1 1/2(38)	11 1/2(292)	3(75)
P500GT-050	50(189)	100(45)	03(75)	14 1/2(370)	5 1/4(135)	31 5/8(803)	19 3/4(500)	23 1/4(591)	1 1/2(38)	11 1/2(292)	3(75)
LOW TYPE											
P500GT-L20	20(75)	40(18)	03(75)	7(180)	3 3/4(95)	39 1/2(1003)	10 1/2(265)	20 3/4(527)	1 1/2(38)	4 1/2(114)	2 1/2(64)
P500GT-L35	35(132)	70(32)	03(75)	7(180)	4 3/4(120)	52 1/2(1327)	11 3/4(300)	26 3/4(679)	1 1/2(38)	4(100)	3(75)
P500GT-L50	50(189)	100(45)	03(75)	10(254)	5 15/16(151)	50 1/2(1288)	15 15/16(404)	26 3/4(679)	1 1/2(38)	7(178)	3(75)

**REGULARLY FURNISHED:**  
 All Steel Coal Tar Epoxy Coated  
 Inside and Outside with Cover,  
 NO-HUB Connections, Grease  
 Draw-Off Valve and Internal  
 Flow Control.

**VARIATIONS:**  
 Threaded Inlet/Outlet - T  
 Fabricated Steel Extension - E  
 (Note 1)

**NOTES:**

- 4" MINIMUM EXTENSION.** Always specify extension height from top of interceptor to top of extension using suffix number for extension. EX: Fig. P500GT-020 with 12"(305) extension, specify P500GT-020-E12.
- It is the responsibility of the installer to check all parts (internal and external) to verify they are in their proper operating order and location.
- Dimensions shown in parentheses are in millimeters unless otherwise noted.



Fig. P500GT-007 thru P500GT-050

(7 GPM-50 GPM)  
 P500GTL - 20, 35, 50

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
B	5-7-19	Revised Variations	TBW	TWK			P500GT-CSA SER
A	12-4-17	Rev. Note, Table, Added PDI	TBW	SJM			