




Whitehall Solid Surface Corner Sink

Model 4161



Please visit www.whitehallmfg.com
for most current specifications.

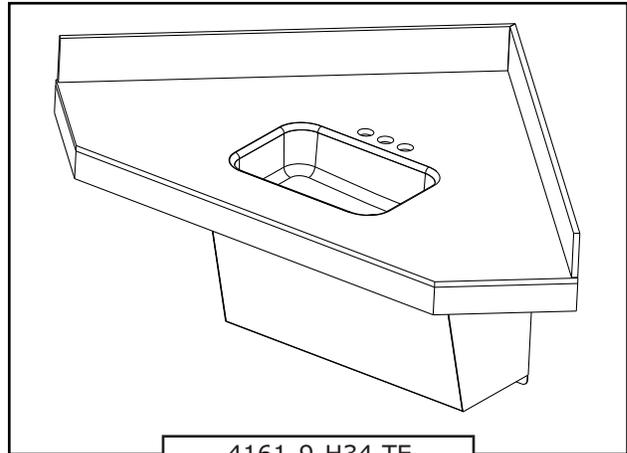

4161-9-H34-TE

Fixture May Show Some Available Options

Solid Surface Corner Sink is intended for general use by medical staff, patients and food handlers. Optional Lead-Free Gooseneck faucet includes Laminar Flow nozzle with an integral 1.2 GPM flow restrictor. Left and Right Backsplashes are shipped loose for assembly in the field. Sink is designed to include an angled internal slope to defuse outlet water and minimize splash. Outside rim is angled downward to prevent pooling water. Fixture includes an offset drain to prevent water from discharging directly into waste.

Fixture is made of Corterra[®] a non-porous solid surface polymer resin with the feel of commercial-grade designer basins and includes an additive SteriTouch[®], that provides antimicrobial protection. Fixture is easy to mount and install onto a finished wall from the front. Unit is certified to IAPMO Z124/CSA B45.5.

Optional Trap Cover is made of type 304 stainless steel and allows easy access to p-trap and other plumbing components.

Waste Connection is 1-1/4" NPS grid strainer with close elbow and 1-1/4" O.D. tailpiece.

GUIDE SPECIFICATION

Provide Whitehall ADA/OBC Infection Prevention Sink (specify model number and options). Fixture shall be fabricated of Corterra[®] non-porous solid surface polymer resin with SteriTouch[®] anti-microbial protection. Sink shall have a deep internal sloping basin and a daisy pattern strainer with grid strainer elbow.

MATERIAL CERTIFICATION

Material of construction, Corterra[™] is flame spread and smoke developed rated "Class A" per the following standards:

- ASTM E84-10
- UL 723
- ANSI/NFPA No. 255
- UBC No. 8-1

Material also complies with Canadian requirements CAN/ULC-S102 for flame spread and smoke developed.

Material of Construction's physical properties in compliance with:

- CSA B45.5/IAPMO Z124
- ANSI/ICPA SS-1

Please visit www.whitehallmfg.com
for most current specifications.



Member of
U.S. Green
Building
Council



Recyclable
Product

SteriTouch[®]

Complies
with the
following
standards:





BASE MODEL NUMBER

-4161 ADA/OBC Compliant Infection Prevention Sink


INFECTION PREVENTION FAUCETS

- 9 Without Valve (Specify Drilling)
 - H1 Single Hole Centered
 - H34 Three Holes 4" Centerset (1-5/16" diameter holes)
- CSG Centerset with Lead-Free Gooseneck Spout, Wrist Blade Handles and Laminar Flow Spout
- SO Sensor Operated Deck Mounted Spout
- SO-BAT Sensor Operated Deck Mounted Spout - Battery Powered (batteries not included)


PRODUCT OPTIONS

- HTR Chromomite Instantaneous Water Heater (For Remote Location) (Refer to Chromomite Labs at <http://chronomite.com> for applications and field installation)
- TE Trap Enclosure
- MXT ASSE 1070 Compliant Temperature/Pressure Balancing Mixing Valve
- TPT Tubular P-Trap

Please visit www.whitehallmfg.com for most current specifications.

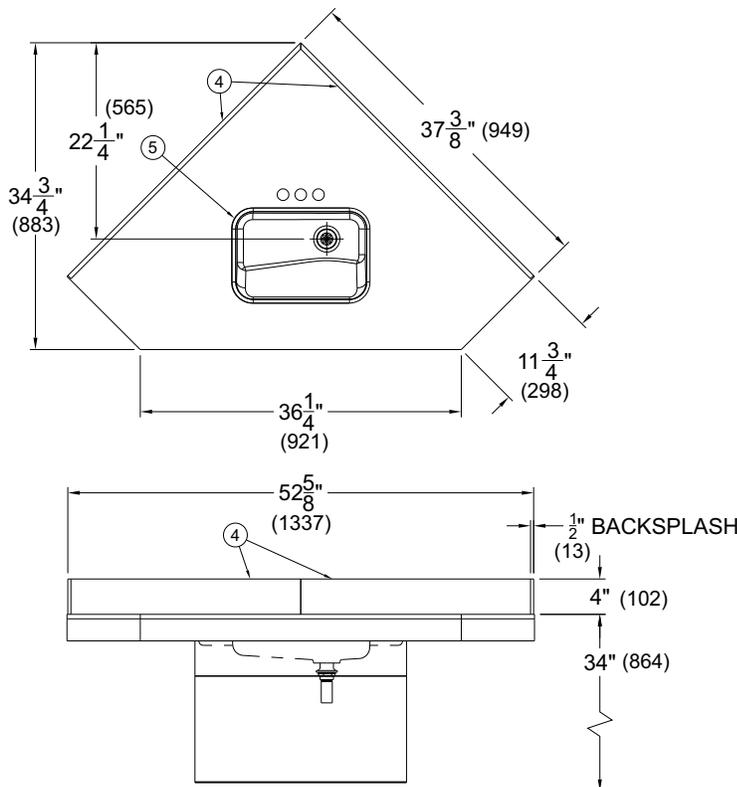

- ① MOUNTING ANGLES
- ② GRID STRAINER AND TAILPIECE PROVIDED
- ③ OPTIONAL -TE STAINLESS STEEL TRAP COVER
- ④ BACKSPASHES - SHIPPED LOOSE FOR FIELD INSTALLATION
- ⑤ 10" ID x 14-1/2" ID INTEGRAL BASIN

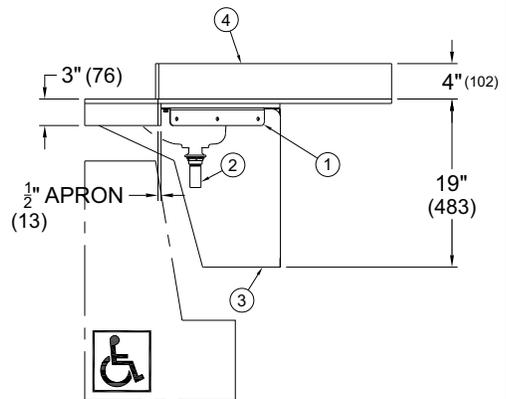

SteriTouch

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or superseded data © Whitehall Manufacturing, Member of Morris Group International. Please visit www.whitehallmfg.com for most current specifications.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
 Company _____ Date _____
 Contact _____ Title _____
 Approval for Manufacturing/Signature _____