



90° SIDE OUTLETS
STAINLESS STEEL - CARBON STEEL

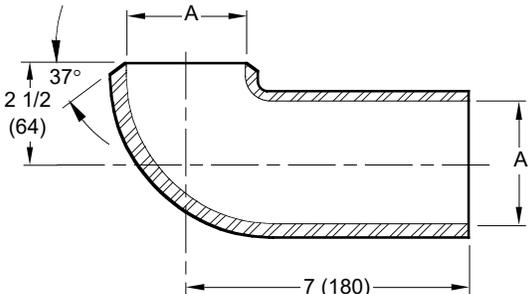



Butt Weld Outlet

Schedule 40 Regularly Furnished

A (Pipe Size) = 02(50), 03(75) or 04(100)

Fig. 9759S SPIGOT OUTLET

REGULARLY FURNISHED:
CF8 (Equivalent to Type 304) Rough Finish Stainless Steel Elbow with Butt Weld Inlet Connection and Plain End Spigot Outlet.

VARIATIONS:
 BW Butt Weld Outlet (Specify Schedule -S05, -S10, -S40 or -S80)

OPTIONAL MATERIALS:
 A-27 Carbon Steel -A27
 CF8M (Equivalent to Type 316) Stainless Steel -316

Design Pressures and Temperatures

1. With proper outlet connection, shall be watertight up to 10 ft. of water column (4.34 psig).
2. When exposed to effluent appropriate for drain material, the drain shall withstand effluent temperatures of 180 degrees F at ambient pressure.

NOTE: Dimensions shown in parentheses are in millimeters.

FIGURE NUMBER	9759	REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
									9759

G F E D 10-16-24 8-28-23 10-18-11 4-28-06 Revised Variations Removed Function Added Note Revised Variations HS HS TBW RN JT CL CL CL CL WEIGHT POUNDS VOLUME CUBIC FEET