


# HOSE VALVES

**BENT NOSE WITH FLANGE**

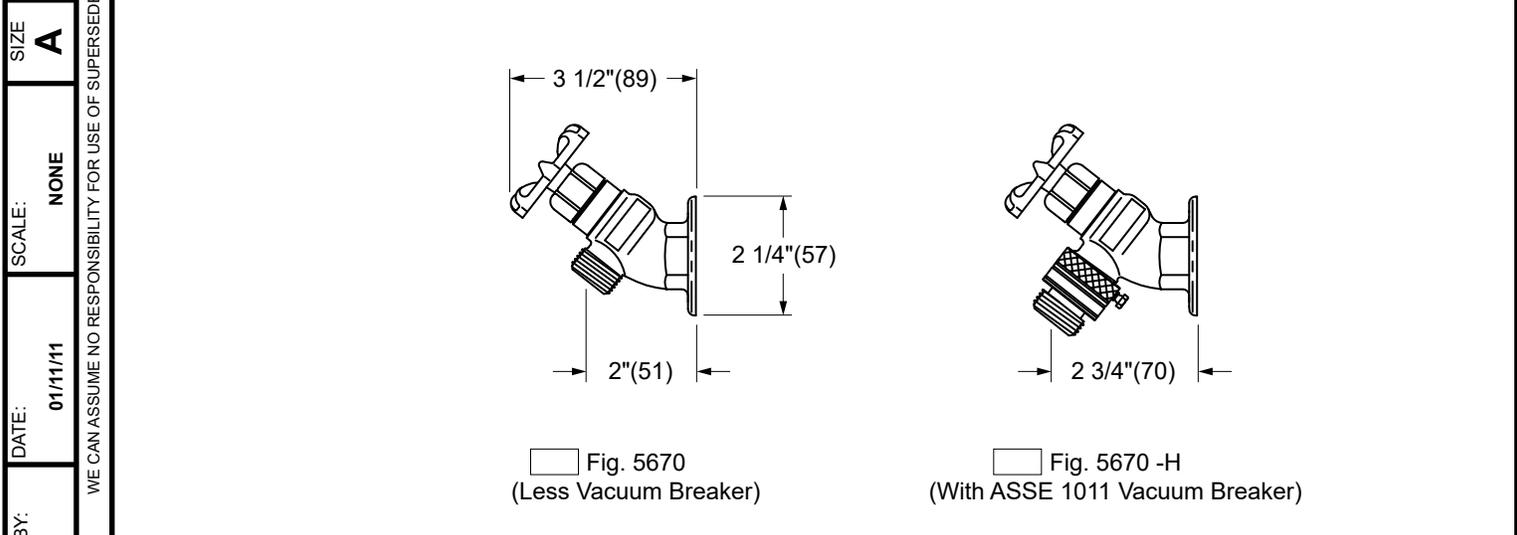

- NOTES:**
1. The AB100, AB1953, California Lead Law, and NSF/ANSI Standard 61 - Drinking Water Components are not applicable to Jay R. Smith hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
  2. Dimensions shown in parentheses are in millimeters.
  3. **FOR IRRIGATION PURPOSES ONLY.**
  4. Temperature Range: 33.0°F to 140.0°F (0.6°C to 60.0°C).

<p><b>REGULARLY FURNISHED:</b>          Hose Valves have a Rough Finish Brass Body with Machined Brass Vandal-Resistant Lock Shield Bonnet, Removable Wheel Handle, 3/4"(19) NPT Female Threaded Inlet and 3/4"(19) Hose Connection.</p>	<p><b>OPTIONAL MATERIALS:</b></p> <input type="checkbox"/> Polished Chrome Plated -CP <input type="checkbox"/> Rough Chrome Plated -CR
--	---

**Installer is responsible for providing a 100% watertight positive seal at the hydrant to wall interface. Seal all the flange with an appropriate sealant recommended by a sealant manufacturer. NOTE: Jay R. Smith does not warrant the performance or life expectancy of the sealant material.**

**NOTE:** Dimensions shown in Parentheses are in millimeters.

FIGURE NUMBER	<b>5670</b>	H 2-3-25 G 4-23-24 F 8-4-23 E 3-22-23	Revised Notes Revised Fig. Description Removed Function Revised Note 1	HS HS HS KK	BW CL CL JT	WEIGHT POUNDS	VOLUME CUBIC FEET	<b>FIGURE NUMBER</b> <span style="font-size: 2em;"><b>5670</b></span>
REV.	DATE	DESCRIPTION			BY	CKD. BY		

DRAWING NUMBER s5670  
 SCALE: NONE  
 DATE: 01/11/11  
 APPROVED BY: CL  
 CHECKED BY: CL  
 DRAWN BY: JJ  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE  
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA