



FLOOR DRAINS STAINLESS STEEL - CARBON STEEL

SPECIAL PURPOSE DRAINS INDIRECT WASTE RECEPTORS

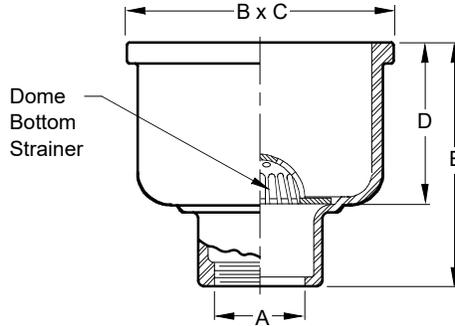

Butt Weld Outlet

Schedule 40 Regularly Furnished

- Fig. 9740C CAULK OUTLET
- Fig. 9740T THREADED OUTLET

PIPE SIZE	A	B	C	D	E
03 (75)	4 (100)	8 (205)	3 (76)	5 1/2 (140)	
03 (75)	6 (150)	12 (305)	7 1/4 (185)	10 1/2 (265)	
04 (100)	6 (150)	12 (305)	7 1/4 (185)	10 1/2 (265)	
06 (150)	6 (150)	12 (305)	7 1/4 (185)	10 1/2 (265)	

REGULARLY FURNISHED:

CF8 (Equivalent to Type 304) Rough Finish Stainless Steel Body with Aluminum Dome Bottom Strainer.

Design Pressures and Temperatures

1. With proper outlet connection, shall be watertight up to 10 ft. of water column (4.34 psig).
2. When exposed to effluent appropriate for drain material, the drain shall withstand effluent temperatures of 180 degrees F at ambient pressure.

VARIATIONS:

- Cast Iron Dome Bottom Strainer -DBS
- Closure Plug and Gasket Available in Stainless Steel -XPSS or Plastic -XPP
- Closure Plug 3/4" (19) Test Plug -TP (Specify Material)
- Seepage Holes -WSH
- Stainless Steel Dome Bottom Strainer -SDBS
- Stainless Steel Flange -F
- Stainless Steel Flange and Flashing Clamp with Seepage Holes -F-C
- BW Butt Weld Outlet (Specify Schedule -S05, -S10, -S40 or -S80)

OPTIONAL MATERIALS:

- A-27 Carbon Steel -A27
- CF8M (Equivalent to Type 316) Stainless Steel -316

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER
S974

SIZE
A

SCALE:
NONE

DATE:
11-12-84

APPROVED BY:
TD

CHECKED BY:
VG

DRAWN BY:
PJ

9740

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 9740
	10-16-24 8-28-23 10-18-11 4-28-06	Revised Variations Removed Function Added Note Revised Variations	HS HS TBW RN	JT CL CL CL			