

H

SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



LOCATION

FLOOR DRAINS

DECONTAMINATION DRAINS


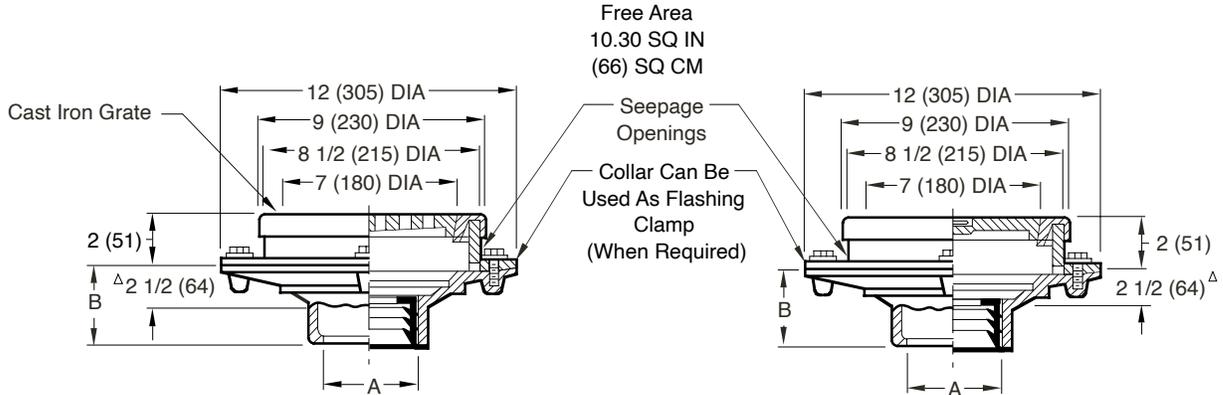


Fig. 9205C CAULK OUTLET
 Fig. 9205Y NO-HUB OUTLET

A SIZE	02(50), 03(75) & 04(100)
B	3 3/4 (95) for Caulk, NO-HUB and Speedi-Set®. 2 (51) for Threaded

NOTE: Dimensions shown in parentheses are in millimeters.

Δ This dimension to Internal Stop of Speedi-Set® Gasket

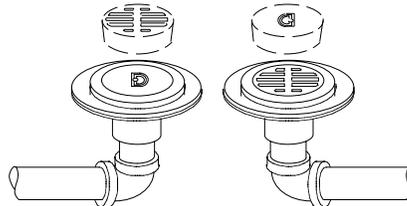

TYPICAL INSTALLATION

Drains are located close to each other for ease of switching grate and plug.

REGULARLY FURNISHED:

Two (2) Duco Cast Iron Bodies with Flashing Collar and Bronze Rim. Cast Iron Grate and Ground Joint Plug.

VARIATIONS:

- Engraved in Rims
- "SANITARY" and "CONTAMINATED"
- L Speedi-Set® Service Weight
- LXH Speedi-Set® Extra Heavy
- T Threaded Outlet

OPTIONAL MATERIALS:

- Acid Resistant Coated -ARC
- Bronze Grate and Plug -RB
- Galvanized Cast Iron -G
- Ductile Iron Grate and Plug -M

DRAWING NUMBER
S9205

SIZE
A

SCALE:
NONE

DATE:
8-12-93

APPROVED BY:

CHECKED BY:

DRAWN BY:
TWK

9205

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							9205