



**NOTES:**

- 1. STAINLESS STEEL FRAME
- 2. STAINLESS STEEL DOOR PAN
- 3. KEY CYLINDER LOCK
- 4. DOOR STOP
- 5. CONTINUOUS HINGE
- 6. MOUNTING HOLES

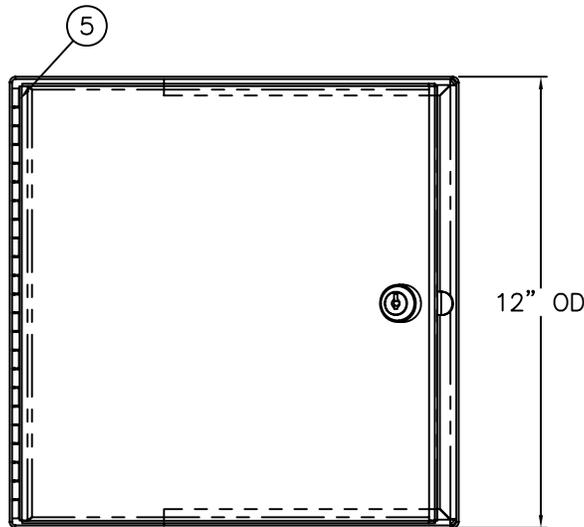

**NOTE:**  
DOOR SWINGS OPEN  
90° MAXIMUM.

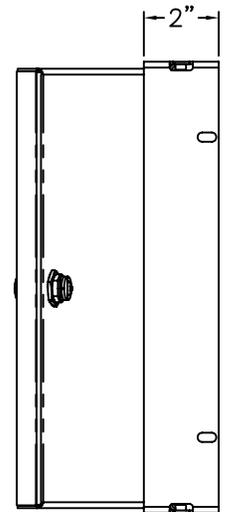

**INSTALLATION INSTRUCTIONS:**

- A- BLOCK-OUT AND FRAME FOR TILE-IN DOOR 1/4" GREATER THAN THE OVERALL DIMENSIONS SHOWN.
- B- OPEN DOOR (2) AND SECURE TO FRAME USING INSTALLER PROVIDED SCREWS OR NAILS FROM THE INSIDE OF ACCESS DOOR FRAME (1). ENSURE THE ACCESS DOOR IS LEVEL AND PLUMB. ACCESS DOOR EDGE SHOULD BE FLUSH WITH FINISHED WALL.
- C- FILL AND FINISH DOOR PAN (2) WITH MATERIAL DESIRED.

 <b>NEO-METRO®</b> P.O. BOX 3527 INDUSTRY, CA. 91744 (800) 591-9050 * (626) 855-4854 FAX (626) 937-4725 WWW.NEO-METRO.COM	<b>TITLE</b> <b>TILE-IN DOOR, AT12X12PC-0001</b>	
	<b>MANUFACTURE DATE</b> <b>APRIL, 2008</b> <b>TO PRESENT</b>	<b>DATE ISSUED</b> <b>04/03/08</b> <b>DATE REVISED</b>