



**Bariatric On-Floor Toilet  
 ADA Compliant  
 Front Mounted**

Model WH2125-A



WH2125-A-W-2-FM-HSBJ-EGE10

Fixture May Show Some Available Options

**Bariatric On-Floor Toilet  
 ADA Compliant**

Fixture is arranged to be installed on a finished wall optionally from the front. Unit is fabricated of 14 gage, type 304 stainless steel and is seamless welded construction. Fixture (less -HSBJ Hinged Seat option) shall withstand loads up to 2,000 lbs. with no measurable deflection and loads up to 5,000 lbs. with no permanent damage. Toilet includes punching for hinged seat as standard. Optional -HSBJ Big John® Hinged Toilet Seat is rated at 1,200 lbs.

**Fixture exterior and Bowl interior** has a #4 polished satin finish.

**Optional -EGE Enviro-Glaze color finishes** are available to powder coat exterior of Bowl and highly recommended to ensure Patient comfort (Specify).

**Housing includes** side Access Panels to facilitate installation of fixture and Hinged Seat by others. Toilet complies with ADA requirements for accessibility. Compliance is subject to the interpretation and requirements of the local code authority.

**Toilet** is optionally available in both Floor Outlet or Wall Outlet with elongated Bowl and an overall depth of 29". Fixtures are manufactured to comply with ASME A112.19.3 and CSA B45.4 standards. Toilet requires a minimum of 25 PSI flow pressure and uses a minimum water consumption of 1.28 GPF. Trap will pass a 2-1/8" ball and is fully enclosed with a minimum 3-1/2" seal.

**Installation** intended for -FM front mounting from the fixture side of the wall.

**Wall Outlet** configurations with Front Mounting (-FM) include a wall waste outlet with a 7-1/2" Dia. Recessed Gasket Flange.

**Floor Outlet** configurations include a floor waste outlet with a 7-1/2" Dia. Recessed Gasket Flange.

**Flush Valve** supply is additionally available for exposed or concealed Flush Valve styles in 1.28 GPF, 1.6 GPF, or 3.5 GPF and with 1-1/2" NPT connection.

**GUIDE SPECIFICATION**

Provide and install Whitehall Bariatric ADA Compliant Toilet (specify model number and options). Unit shall conform to ADA requirements. Fixture shall be fabricated from 14 gage, type 304 stainless steel. Construction shall be seamless welded and exposed surfaces shall have a satin finish. Toilet shall have an elongated Bowl with a self-draining Flushing Rim and punching for Seat by others. Toilet shall be ASME A112.19.3 and CSA B45.4 compliant. Toilet requires a minimum of 25 PSI flow pressure and uses a minimum water consumption of 1.28 GPF. Fully enclosed Toilet Trap shall have a minimum 3-1/2" seal that shall pass a 2-1/8" diameter ball.

Please visit [www.whitehallmfg.com](http://www.whitehallmfg.com) for most current specifications.



Recyclable Product



Water Conserving Product

Complies with the following standards:





**WALL THICKNESS AND TYPE**

Thickness \_\_\_\_\_ Type \_\_\_\_\_

**MODEL NUMBER AND OPTIONS SELECTION**

**BASE MODEL NUMBER**

WH2125-A Bariatric Toilet ADA Compliant

**SUPPLY (Must Specify)**

- T Top (Exposed)
- W Wall (Concealed)

**FIXTURE MOUNTING AND WASTE (Must Specify)**

- 2 On-Floor, Wall Outlet
- 3 On-Floor, Floor Outlet

**INSTALLATION**

-FM Front Mount

**FLUSH VALVE GPF's (Must Specify)**

- 1.28 GPF (WaterSense Certified)
- 1.6 GPF (Federal EPA Standard)
- 3.5 GPF (Verify with Local Code Authority)

**FLUSHING INLET LOCATION (Must Specify for -W Wall (Concealed) Supply)**

- LFV Flush Valve Left
- RFV Flush Valve Right (Shown)

**FLUSH VALVE OPTIONS (Must Specify)**

**\*SEE WHITEHALL SUPPLEMENTARY MATERIAL FOR FLUSH VALVE COVERS AND BOXES\***

- FV Flush Valve, Mechanical (N/A for ADA)
- FVBO Flush Valve by Others
- FVH Flush Valve, Hydraulic (Wall Supply)
- FVL Flush Valve, ADA Lever Handle (Wall Supply)
- MVCFV Time-Trol Flush Valve (N/A for Top Supply)

**TOILET SEAT OPTIONS**

- HSBJ Big John<sup>®</sup> Hinged Seat (16-3/4" Rim Height)
- OFLC Open Front Less Cover (Shown Below)
- OFWC Open Front With Cover
- LPFS Less Punch for Hinged Seat (17" Rim Height)

**TOILET OPTIONS**



- BL Bedpan Lugs
- FVT Flush Thru Wall Connector (-W Models Only)
- PE Plain End Toilet Waste (3" Beyond Fixture)
- TF Transformer, 120VAC to 24VAC (For -MVCFV)
- TSC Toilet Shipping Cover

**PRODUCT OPTIONS**

- EGE Enviro-Glaze Color Specify: \_\_\_\_\_  
Toilet Exterior Only - [EG Color Selection Link](#)
- VAC AcornVac System (Refer to Vac. System Details)


**NOTES:**

1. OPTIONAL -HSBJ BIG JOHN HINGED SEAT
2. -RFV OFFSET FLUSHING INLET SHOWN FOR -W CONCEALED SUPPLY. -LFV IS OPPOSITE
3. 7-1/2" GASKET WASTE WALL OUTLET
4. LEFT AND RIGHT ACCESS PANELS
5. -T TOP SUPPLY SHOWN FOR REFERENCE
6. STANDARD PUNCHING FOR HINGED SEAT
7. 7-1/2" GASKET WASTE FLOOR OUTLET

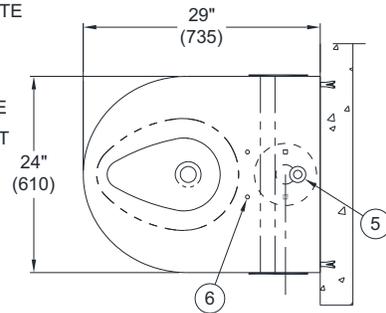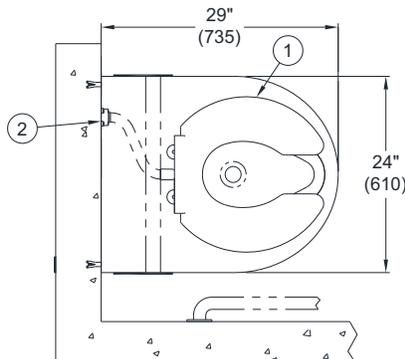


**RIM HEIGHT DETAILS:**

\*ADA requires a minimum of 17" to 19" maximum measured from finished floor to the top of the seat or rim.  
 - Units are provided standard 17" rim height.  
 - Units specified with the -HSBJ Seat option are provided with 16 3/4" rim height.  
 - Refer to Installation Instructions for complete rough-in details.

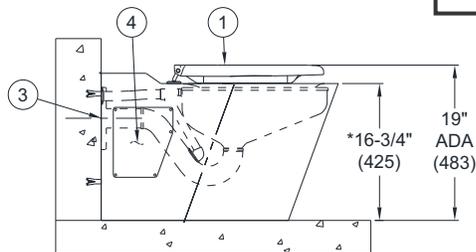

**2125A-W-2-FM-RFV-HSBJ WITH 16-3/4" RIM HEIGHT FOR -HSBJ SEAT OPTION**

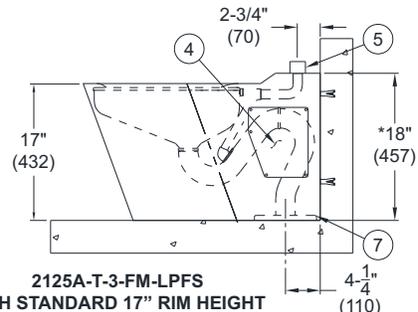

**2125A-T-3-FM-LPFS WITH STANDARD 17" RIM HEIGHT**

**⚠ WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**

**SELECTION SUMMARY & APPROVAL FOR MANUFACTURING**

Model Number & Options \_\_\_\_\_ Quantity \_\_\_\_\_  
 Company \_\_\_\_\_ Date \_\_\_\_\_  
 Contact \_\_\_\_\_ Title \_\_\_\_\_  
 Approval for Manufacturing/Signature \_\_\_\_\_

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or superseded data © Whitehall Manufacturing, Member of Morris Group International. Please visit [www.whitehallmfg.com](http://www.whitehallmfg.com) for most current specifications.