

Post Hydrant

MODEL M-75

3/4" FREEZE RESISTANT,
COMPRESSION-TYPE POST HYDRANT

STANDARD FEATURES

Model M-75 delivers year-round service outside or in unheated buildings. To provide freeze resistant functionality, the control valve is located below the frost line. Turning the handle raises or lowers the internal supply-line assembly, controlling the valve. Hydrant must be operated fully "on". Constructed of heavy red brass, premium-quality gray iron and steel, the M-75 is designed for trouble-free reliability and easy maintenance.

SUGGESTED SPECIFICATIONS

Hydrant shall be Murdock model M-75. Unit shall be capable of year-round use in freezing weather.

Unit shall extend below grade level so that centerline of supply inlet is positioned at or below frost line. Inlet shall have union connection.

Water shall be gravity-evacuated from inner supply column when valve is shut off.

Valve shall be turn-handle operated. Handle shall be fabricated of one-piece iron casting finished with a heavy grade of oil-based green enamel. Stock, top, and base shall be fabricated of heavy, one-piece iron castings finished with a heavy grade of oil-based green enamel.

Inner supply assembly shall incorporate solid-brass castings. All solid-brass castings shall conform to ASTM standards B61 and B62. Lead-free castings are used in all waterways.

Outer casing shall be black iron pipe, finished with a heavy grade of oil-based green enamel. Nozzle shall be solid brass casting, threaded for 3/4" hose connection.

Refer to [LINK](#) for Hydrant Discharge Flow Rates.



Standard Model: M-75

DEPTH OF BURY (additional costs may be incurred)

- | | |
|---|---|
| <input type="checkbox"/> 2 ft. (61 cm) | <input type="checkbox"/> 5 ft. (152.4 cm) |
| <input type="checkbox"/> 3 ft. (91.4 cm) | <input type="checkbox"/> 6 ft. (182.9 cm) |
| <input type="checkbox"/> 4 ft. (121.9 cm) | <input type="checkbox"/> Other _____ |

OPTIONS (additional costs may be incurred)

- BFH Double ball check valve and vacuum breaker*
- VB Vacuum breaker
- LC1 Locking cover, less padlock*
- R01 Shut off valve with plate*
- Plain end spout
- Sewer drain connection

* See separate option sheets

Certified to the following standards:




Federal Public Law 111-380 (No Lead)



Recyclable Product

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Post Hydrant
MODEL M-75
3/4" FREEZE RESISTANT,
COMPRESSION-TYPE POST HYDRANT

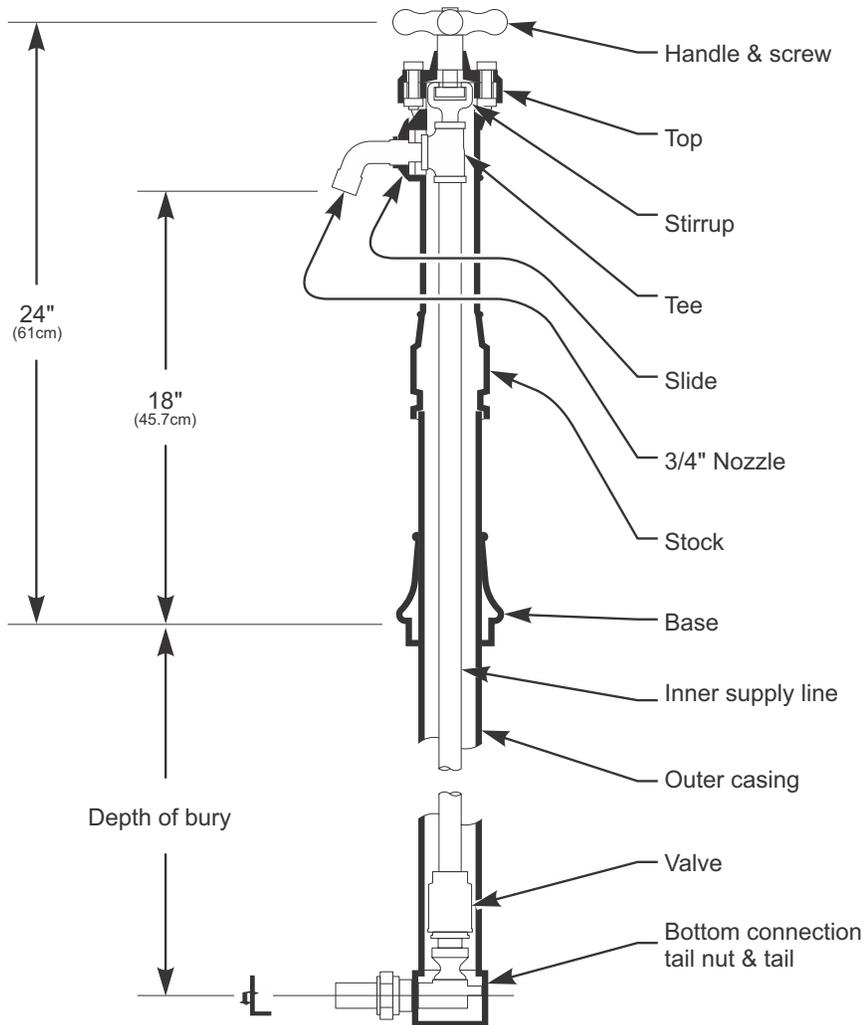

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	Model Number & Options _____	Quantity _____	<p><i>All dimensions are subject to manufactures tolerance of plus or minus 1/2" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.murdockmfg.com for most current specifications.</i></p>
	Company _____		
	Contact _____	Title _____	
	Signature (Approval for Manufacturing) _____	Date _____	