

## CLEANOUTS STAINLESS STEEL - CARBON STEEL

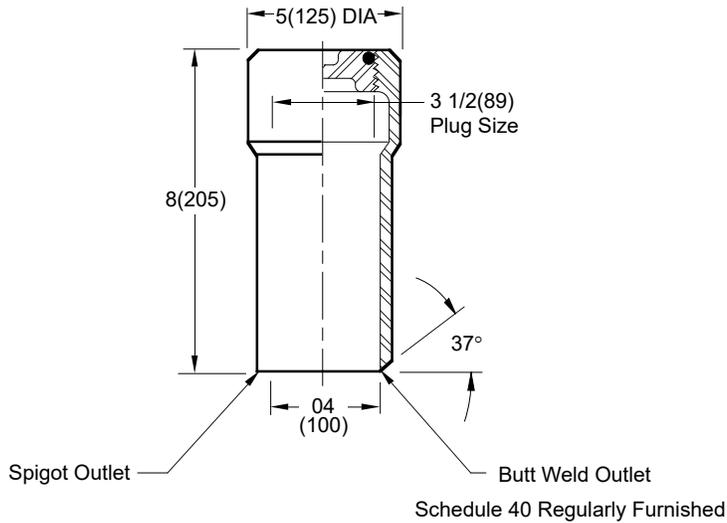


Fig. 9770S . . . SPIGOT OUTLET

**REGULARLY FURNISHED:**  
 CF8 (Equivalent to Type 304)  
 Rough Finish Stainless Steel  
 Body and Plug with Gasket.

**VARIATIONS:**

<input type="checkbox"/>	Satin Finish Top -SF
<input type="checkbox"/>	BW Butt Weld Outlet (Specify Schedule -S05, -S10, -S40 or -S80)

**OPTIONAL MATERIALS:**

<input type="checkbox"/>	Carbon Steel -A27
<input type="checkbox"/>	CF8M (Equivalent to Type 316) Stainless Steel -316

**Design Pressures and Temperatures**

1. With proper outlet connection, shall be watertight up to 10 ft. of water column (4.34 psig).
2. When exposed to effluent appropriate for drain material, the drain shall withstand effluent temperatures of 180 degrees F at ambient pressure.

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER **S9770**  
 SIZE **A**  
 SCALE: **NONE**  
 DATE: **11-12-84**  
 APPROVED BY: **T.D.**  
 CHECKED BY: **VGD**  
 DRAWN BY: **P.J.**  
**9770**  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE  
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

G F E D	10-16-24 8-28-23 5-18-15 10-18-11	Revised Variations Removed Function Revised Dimension Added Note	HS HS TBW TBW	JT CL CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	<b>FIGURE NUMBER</b>  <b>9770</b>
REV.	DATE	DESCRIPTION	BY	CKD. BY			