




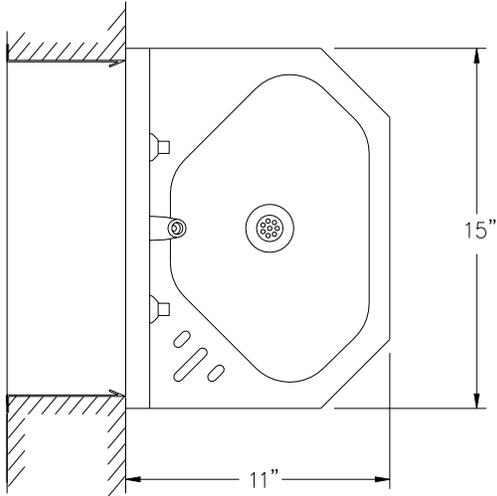

NOTE: USE MOUNTING HARDWARE FROM ORIGINAL UNIT TO MOUNT THE REPLACEWARE UNIT.

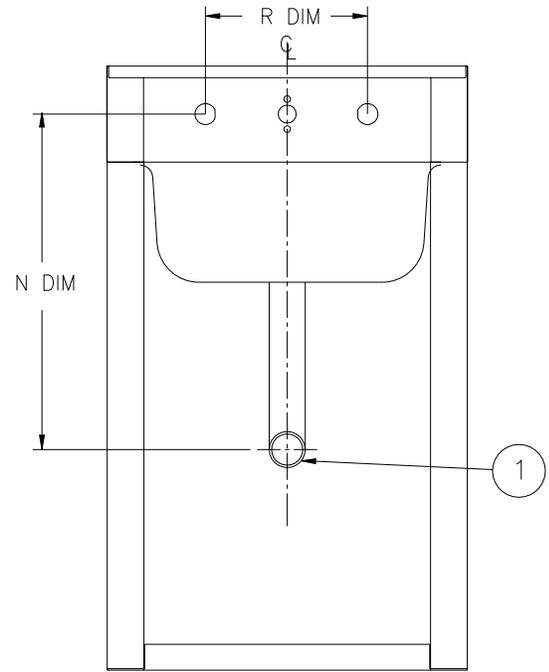

REFERENCE DRAWINGS	
-4 AIR-CONTROL (HOT & COLD)	9905-010-003
-3 AIR-CONTROL (SINGLE TEMP.)	9905-011-003
3395 ANCHORING ASSEMBLY	9925-759-001

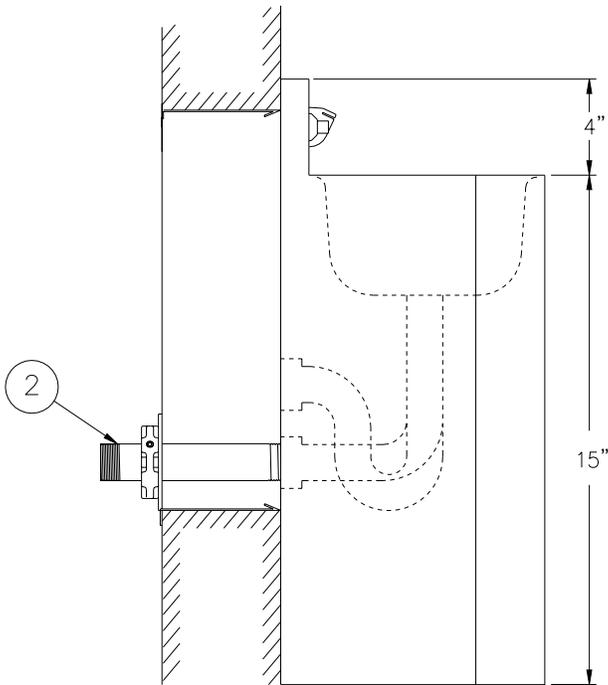


REAR VIEW


INSTALLATION INSTRUCTIONS:

- A-REFER TO VALVE INSTALLATION SHEETS LISTED. INSTALL VALVE TO FIXTURE. VALVE PROVIDES UPPER FIXTURE SUPPORT.
- B-MAKE UP FIXTURE WASTE CONNECTION 1-1/4" NPT ① FEMALE. RECOMMENDED ADDITIONAL MOUNTING IS WITH OPTIONAL MODEL #3395 MOUNTING ADAPTER ② .


<p>ACORN ENGINEERING COMPANY P.O. BOX 3527 INDUSTRY, CA. 91744 (626) 336-4561 FAX (626) 961-2200</p>	<p>TITLE 15" COMPACT LAVATORY CAT #3325 SERIES</p>	
	<p>MANUFACTURE DATE MARCH 12 1999 TO PRESENT</p>	<p>DATE ISSUED 03-12-99</p> <p>DATE REVISED 07-09-99</p>

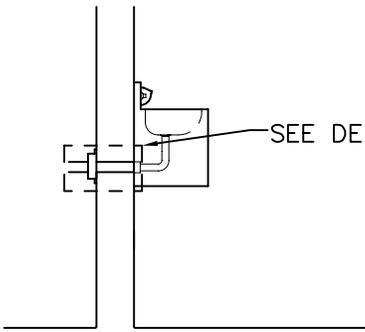


Lavy Waste Connection

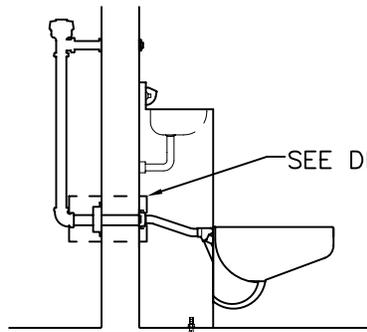

Comby Flushing Inlet Connection

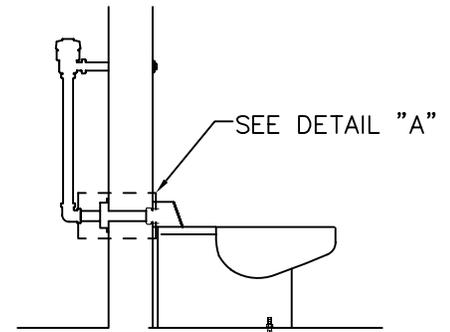

Toilet Flushing Inlet Connection

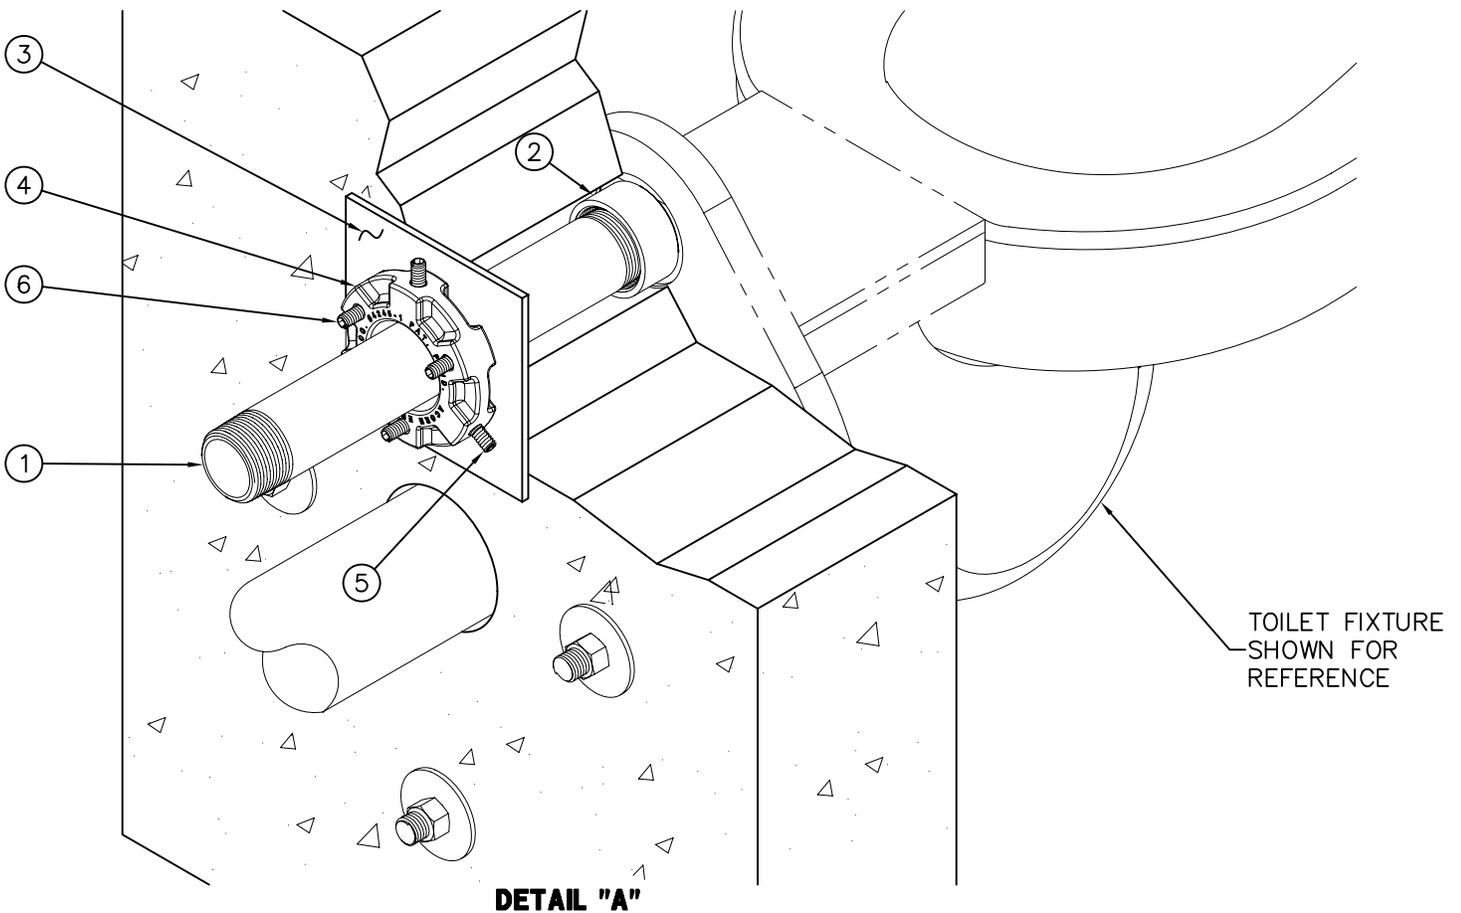

INSTALLATION INSTRUCTIONS:

- A- SECURE PIPE ① TO FIXTURE CONNECTION ② THROUGH WALL.
- B- PLACE THRUST PLATE ③ FLUSH AGAINST WALL.
- C- PLACE ANCHORING COLLAR ④ FLUSH AGAINST THRUST PLATE ③.
- D- HOLD UNIT AGAINST WALL, PARALLEL TO THE FLOOR.

- E- TIGHTEN SCREWS ⑤ (3 PLACES) TO SECURE ANCHORING COLLAR ④ TO PIPE ①.
- F- TIGHTEN SCREWS ⑥ (3 PLACES) TO PULL PIPE ① AND PUSH AGAINST THRUST PLATE ③ IN ORDER TO HOLD FIXTURE WITH TENSION AGAINST WALL.



ACORN ENGINEERING COMPANY
P.O. BOX 3527 INDUSTRY, CA. 91744
(626) 336-4561 FAX (626) 961-2200

TITLE 3395 ANCHORING ASSEMBLY		
MANUFACTURE DATE MAY 1998 TO PRESENT	DATE ISSUED 10/06/99	DRAWING NUMBER 9925-759-001
	DATE REVISED 04/08/11	