

D

DRAWING NUMBER  
S1010 (-E-W)

SIZE  
A

SCALE:  
NONE

DATE:  
02/12/08

APPROVED BY:  
CL

CHECKED BY:  
CL


DRAWN BY:  
JJ

FIGURE NUMBER  
**1010 (-E-W)**

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA  
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

# ROOF DRAINS

## FOR INSULATED "BUILT-UP" MEMBRANE ROOFS

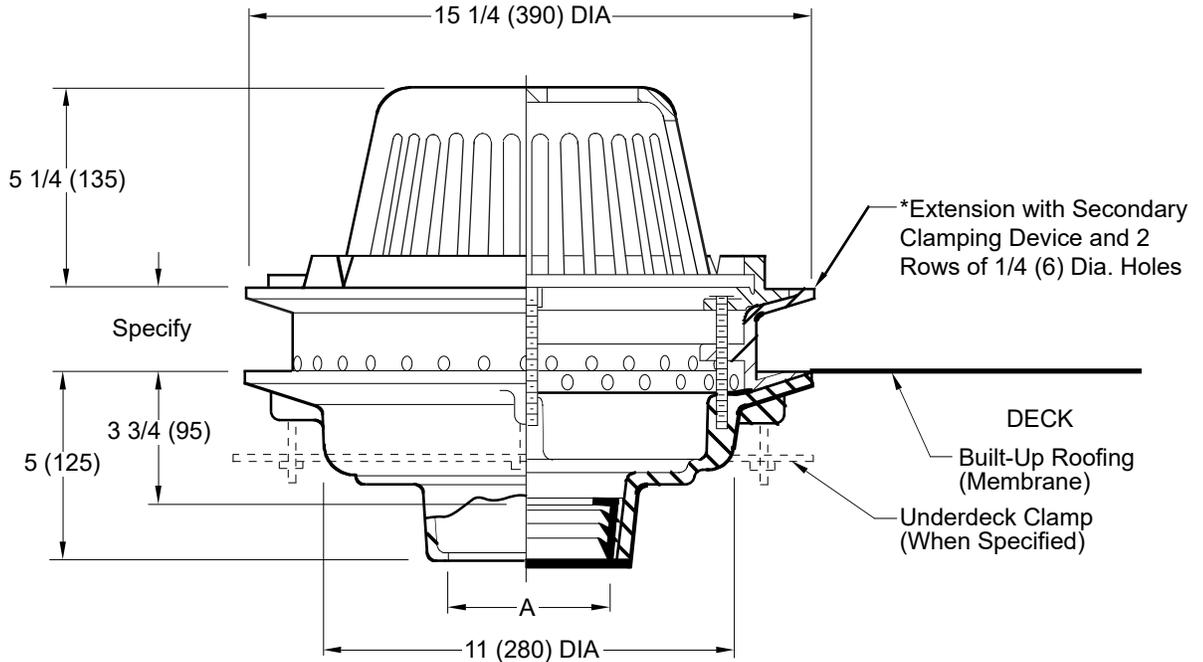

A (Pipe Size) = 02 (50), 03 (75), 04 (100), 05 (125) or 06 (150)

- Fig. 1010C (-E-W) . . . . . CAULK OUTLET
- Fig. 1010Y (-E-W) . . . . . NO-HUB OUTLET
- Fig. 1010T (-E-W) . . . . . THREADED OUTLET

recommended deck opening

with suffix -R	17 (430) DIA
less suffix -R	14 (355) DIA

\*Ext. thru 4" (100) size will be C.I.,  
 over 4" (100) will be fabricated  
 stainless steel. (C.I. ext. shown)

**REGULARLY FURNISHED:**

Duco Cast Iron Body, Extension with Secondary Clamping Device and 2 Rows of 1/4 (6) Dia. Holes, Combined Flashing Clamp and Gravel Stop and Polyethylene Dome.

**VARIATIONS:**

- Vandal Proof Dome -J
- Sump Receiver -R
- Underdeck Clamp -C
- Roof Deck Plate -RDP

**VARIATIONS:**

- ▲  Bronze Dome -RBD
- ▲  Cast Iron Dome -CID
- ▲  Galvanized Cast Iron -G
- ▲  Aluminum Dome -AD

**▲Optional domes' free area are as follows:**

Aluminum	98 (632)
Cast Iron	80 (516)
Bronze	95 (613)

**NOTE:** Dimensions shown in parentheses are in millimeters.

D	3-25-24	Revised Variations, Fig. Opts	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER <b>1010 (-E-W)</b>
C	7-30-19	Removed NOTE	MW	CL			
B	8-3-15	Added Flow Rate Note	TBW	BW			
A	06/01/09	Added Optional Dome Notes	JJ	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			