


FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS FOR UNFINISHED AREAS

ROUND EXTRA HEAVY DUTY CAST IRON TOP

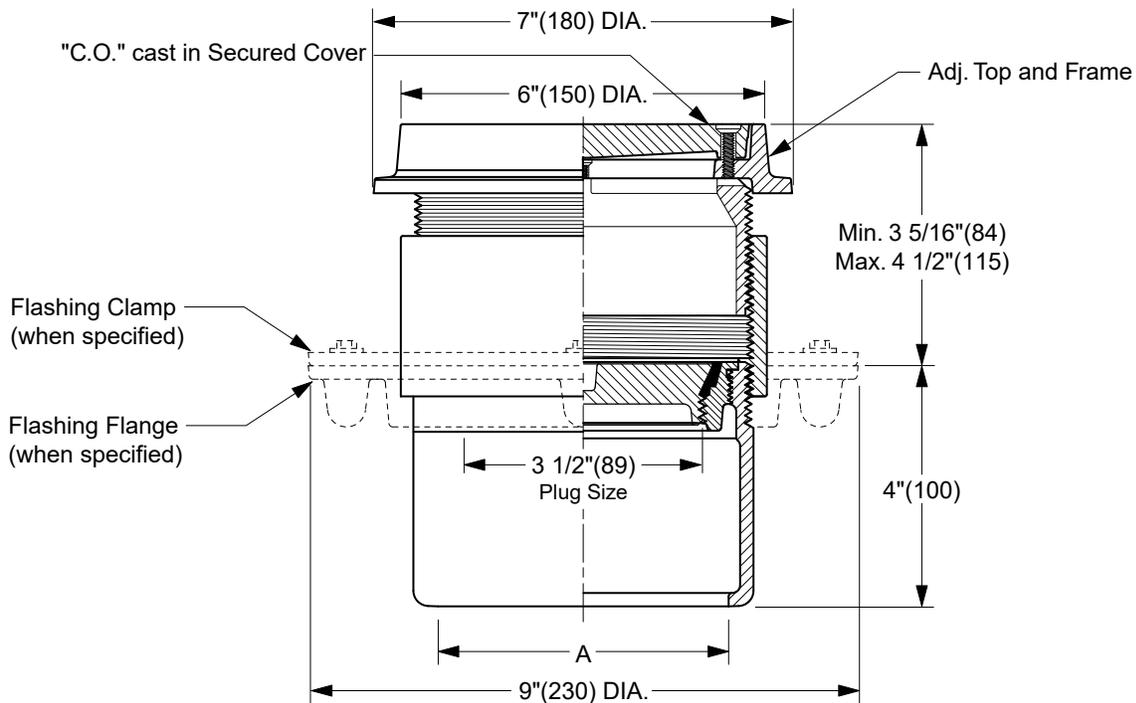

TWIS-TO-FLOOR® ADJUSTMENT
INSIDE CAULK OUTLET

"A" (Pipe Size) = 02(50), 03(75) or 04(100)

Conforms to ASME A 112.36.2/CSA B79.2

- Fig. 4225C.....Gasket Seal - ABS Plug
- Fig. 4226C.....Gasket Seal - Bronze Plug
- Fig. 4228C.....Taper Thread - Bronze Plug
- Fig. 4229C.....Taper Thread - ABS Plug

(Twis-to-Floor® design shown with gasketed plug.)

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Duco Cast Iron Cleanout with Round Adjustable Scoriated Secured Cast Iron Top. Closure Plug Type as Indicated By Figure Number Selected.

VARIATIONS:

- Flashing Flange -F
- Flange with Flashing Clamp -F-C
- Vandal Proof Top -U

OPTIONAL MATERIALS:

- Galvanized Cast Iron -G
- Ductile Iron Cover -M

DRAWING NUMBER S4225
 SIZE A
 SCALE: NONE
 DATE: 2-16-70
 APPROVED BY: JM
 CHECKED BY: BH
 DRAWN BY: RK
4225 SERIES
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
	4-11-24 11-3-23 6-10-22 12/17/04	Added ASME Note Removed Function Revised Options Added Width Dimension at Top	HS HS KK JJ	CL CL CL CL			4225 SERIES