




Option -FVT

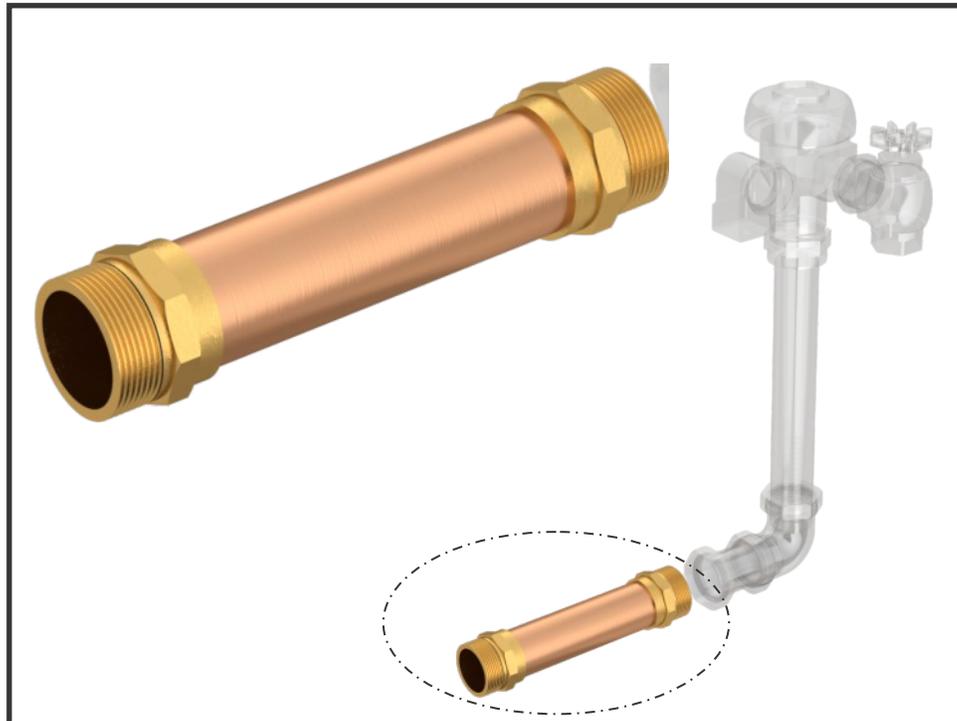

Flush Valve, Thru Wall Connection -

The -FVT Flush Valve Thru-Wall connection is an optional feature available for our chase wall mounted Combination and Toilet fixtures and used where the wall thickness exceeds 2".

This option provides an extension from the Flush Valve to the fixture Flushing Inlet extending through the wall, making installation easier and more accessible.

The FVT is installed in the plumbing chase and provides NPT (National Pipe Thread) adapter connections on both ends (sized to suit fixture flush inlet) with copper tubing sized to suit Wall thickness. In the chase, one end of the FVT connects to the Flush Valve Elbow; the FVT then extends through the wall and connects to the fixture Flushing Inlet.

This configuration allows the installer to complete the Flush Valve connection without reaching into the wall cavity, simplifying installation. The FVT assembly is to be dry-fit, cut to fit, and soldered in the field to accommodate actual site conditions.

Please visit www.acorneng.com for most current specifications.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

