Whitehall Manufacturing®
Manufacturer of Healthcare and Rehabilitation Products since 1946

Use

FOOT AND ANKLE WHIRLPOOLS

P SERIES

10 GALLON MOBILE WHIRLPOOL

WHP-10-M
WHP-10-MH
WHP-10-MU



WHP-10-MH
Fixture May Show Available Options

Whitehall® WHP-10-M Mobile Whirlpool

Tank Capacity is 10 gallons.

WHP-10-MH is a Mobile Whirlpool with Handle of heavy duty construction with the hand grip section approximately 36" above ground level for ease in maneuvering the whirlpool from one location to another.

WHP-10-MU is a Mobile Whirlpool with Undercarriage of heavy duty construction and fixed height which raises the tank for use on the upper extremities.

Whirlpool Tank is 22"L x 13"W x 12"D and is seamless welded construction, fabricated from heavy gauge, type 304 stainless steel, polished to a satin finish. Tank rim is reinforced with a concealed stainless steel rod. Tank bottom is a seamless, coved (rounded) design for effective cleaning.

Heavy Duty Swivel Casters support all mobile models. Rear pair of casters are lockable for stabilizing during Whirlpool use.

Turbine Raising and Lowering Device permits adjustment of desired height and direction of water agitation towards the area of the body during whirlpool use. It is spring balanced and provided with a locking device.

Turbine Assembly functions both as agitator and emptying device. It is equipped with Underwriters Laboratory listed 1/2 HP jet pump motor protected with an ABS plastic shell, automatic thermal overload protector, and lifetime-sealed bearings. All parts contacting the water are stainless steel, chrome plated brass or bronze.

Drain Option -SDP has a bottom drain, leading to a separate, concealed water evacuation pump. A hose is attached to the side of the unit during Whirlpool use to facilitate the evacuation. Note: -SDP option raises overall Whirlpool Rim Height by 2" (51mm). Refer to supplemental option submittal.

Thermometer is provided with a dual scale, adjustable calibration, and a stem inserts into a retainer to prevent rattle during whirlpool agitation.

Guide Specifications

Provide Whitehall Mobile Whirlpool (specify model number and options) with a 10-gallon capacity, 22"L x 13"W x 12"D. Whirlpool shall be fabricated from heavy gauge, type 304 stainless steel. Construction shall be seamless welded and exposed surfaces shall be polished to satin finish. Bottom of tank shall be a seamless, rounded coved design. Whirlpool shall have heavy duty swivel casters with locking device on rear pair of casters. Provide a turbine assembly with raising and lowering device which functions both as agitator and emptying device, permits adjustment of desired height, direction of water agitation, and can be locked into place. Turbine assembly shall be UL listed 1/2 HP jet pump motor with automatic thermal overload protector and lifetime-sealed bearings. Provide a thermometer with a stem retainer to prevent rattling when whirlpool is in operation.

P SERIES
FOOT AND ANKLE WHIRLPOOLS

MODEL NUMBER AND OPTIONS SELECTION

NOTE: *This is an interactive PDF. For maximum readability: Turn Preferences > Forms > Highlight Color "Off"*

SERIES

☑ **WHP** Foot and Ankle Whirlpool

CAPACITY

☑ **10** Gallons

TYPE (MUST SPECIFY)

❑ **-M** Mobile Whirlpool
❑ **-MH** Mobile Whirlpool with Handle
❑ **-MU** Mobile Whirlpool with Undercarriage

TURBINE ELECTRICAL REQUIREMENTS (MUST SPECIFY)


❑ 115VAC / 60Hz (6.2 AMPS)
❑ 230VAC / 50Hz (3.5 AMPS) Country of Use: _____

FOR MIXING VALVE: Refer to supplemental MXT15-OTG and DU-1 sheet for details.


SUFFIX OPTIONS

(Refer to Supplemental Product Option Submittals for Details)

❑ **ADH** Auxiliary Drain Hose Assembly
❑ **EG** Enviro-Glaze® Color Powder Coating – Specify Color: _____
❑ **GFI** Power Cord with Ground Fault Interrupter
❑ **HL** Hydrolift
❑ **LOGO** Applied Logos: Team, Company, Facility
❑ **SDP** Separate Drain with Pump (Increases Overall Height by 2")

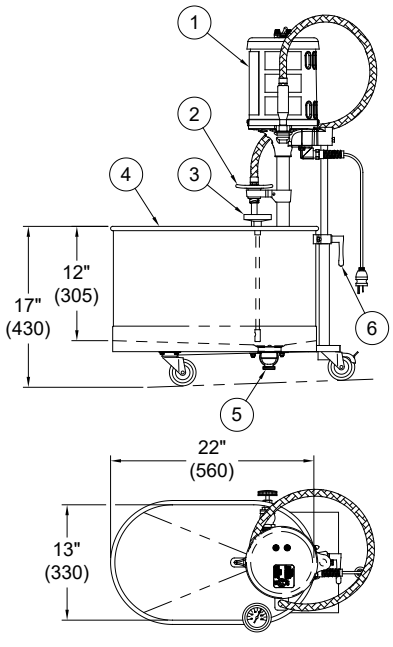

MODEL WHP-10-M

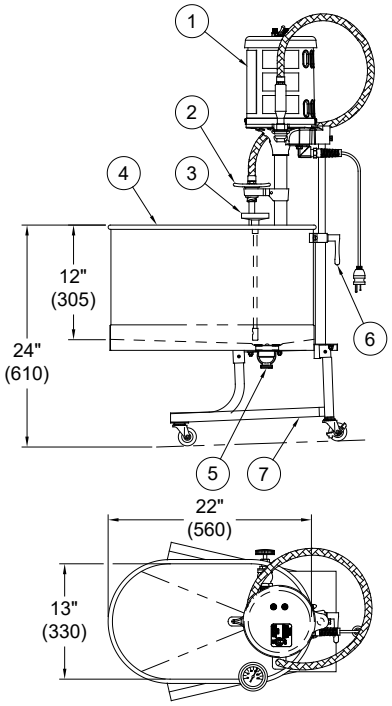

MODEL WHP-10-MU

NOTES:

1. 1/2 HP Jet Pump Motor
2. Variable Pressure Control
3. Thermometer
4. Stainless Steel Tank
5. Auxiliary Drain Valve
6. Turbine Raising & Lowering Device
7. Optional -MU Undercarriage

IMPORTANT: Dimensions shown for reference only. Refer to product installation instructions for complete details prior to rough-in.

APPROVAL FOR MANUFACTURING

Company _____ Date _____

Contact _____ Title _____

Approval for Manufacturing/Signature _____

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or superseded data. Please visit www.whitehallmfg.com for most current specifications. Warranty Info. © Copyright 2026

⚠ **WARNING:** Cancer and Reproductive Harm — www.P65Warnings.ca.gov