

Post Hydrant

MODEL M-2100

1" FREEZE RESISTANT, SELF-CLOSING
PEDAL OPERATED POST HYDRANT

STANDARD FEATURES

Model M-2100 delivers year-round service outside or in unheated buildings. To provide freeze resistant functionality, the control valve is located below the frost line. Stepping on the pedal raises the internal supply-line assembly to open, and the self-closing spring lowering the internal supply-line assembly to close. Constructed of heavy lead-free brass, premium-quality gray iron and steel, the M-2100 is designed for trouble-free reliability and easy maintenance.

SUGGESTED SPECIFICATIONS

Hydrant shall be Murdock model M-2100. Unit shall be capable of year-round use in freezing weather.

Unit shall extend below grade level so that centerline of supply inlet is positioned at or below frost line. Inlet shall have 1" NPT male connection.

Water shall be gravity-evacuated from inner supply column when valve is shut off.

Valve shall be pedal operated. Pedal shall be fabricated of one-piece iron casting finished with a heavy grade of oil-based green enamel. Stock, top, and base shall be fabricated of heavy, one-piece iron castings finished with a heavy grade of oil-based green enamel.

Inner supply assembly shall incorporate solid-brass castings. All solid brass castings shall conform to ASTM standards B61 and B62. Lead-free castings are used in all waterways.

Outer casing shall be black iron pipe, finished with a heavy grade of oil-based green enamel.

Hydrant shall consist of internal supply line and a surrounding outer casing pipe for protection of waterway.

Nozzle shall be solid brass casting, threaded for 1" NPS hose connection.

Refer to [LINK](#) for Hydrant Discharge Flow Rates.



Standard Model: M-2100

DEPTH OF BURY (additional costs may be incurred)

- | | |
|---|---|
| <input type="checkbox"/> 2 ft. (61 cm) | <input type="checkbox"/> 5 ft. (152.4 cm) |
| <input type="checkbox"/> 3 ft. (91.4 cm) | <input type="checkbox"/> 6 ft. (182.9 cm) |
| <input type="checkbox"/> 4 ft. (121.9 cm) | <input type="checkbox"/> Other _____ |

OPTIONS (additional costs may be incurred)

- | | |
|-------------------------------|---|
| <input type="checkbox"/> -BFH | Double Ball Check Valve and Vacuum Breaker* |
| <input type="checkbox"/> -VB | Vacuum Breaker |
| <input type="checkbox"/> -R01 | Shut Off Valve with Plate* |
| <input type="checkbox"/> -SE | Plain End Spout |
| <input type="checkbox"/> -SWD | Sewer Drain Connection |

* See separate option sheets

Certified to the following standards:



Recyclable Product

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov


MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • www.murdockmfg.com

Member of
MORRIS GROUP
INTERNATIONAL


Post Hydrant

MODEL M-2100

1" FREEZE RESISTANT, SELF-CLOSING
PEDAL OPERATED POST HYDRANT

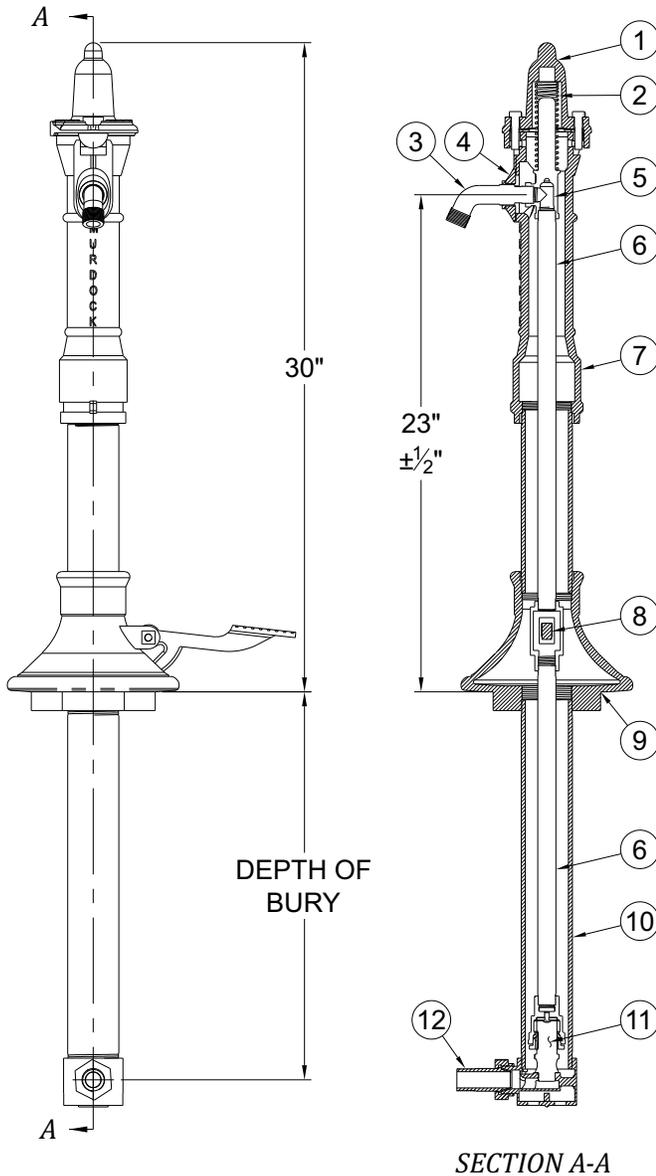

- | | |
|-------------------------------|-----------------------|
| ① TOP | ⑦ STOCK |
| ② SPRING | ⑧ PEDAL |
| ③ 3/4" NPSM HOSE BRASS NOZZLE | ⑨ BASE |
| ④ SLIDE | ⑩ 2" IPS OUTER CASING |
| ⑤ TEE | ⑪ VALVE |
| ⑥ INNER SUPPLY PIPE | ⑫ 1" NPT BRASS INLET |

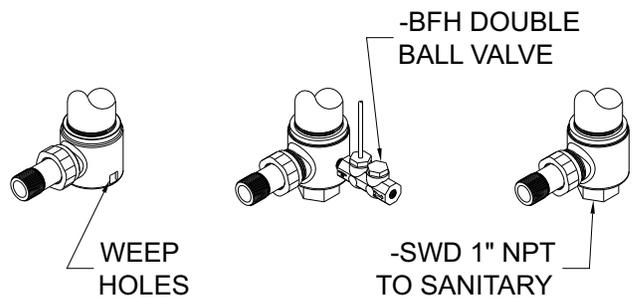

SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/2" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.murdockmfg.com for most current specifications.