

GENERAL PURPOSE FLOOR DRAIN WITH ADJUSTABLE STRAINER HEAD

DRAWING NUMBER **S9600**

SIZE **A**

SCALE: **NONE**

DATE: **7-16-14**

APPROVED BY: **JM**


CHECKED BY: **CL**

DRAWN BY: **TBW**

FIGURE NUMBER **9600**


WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

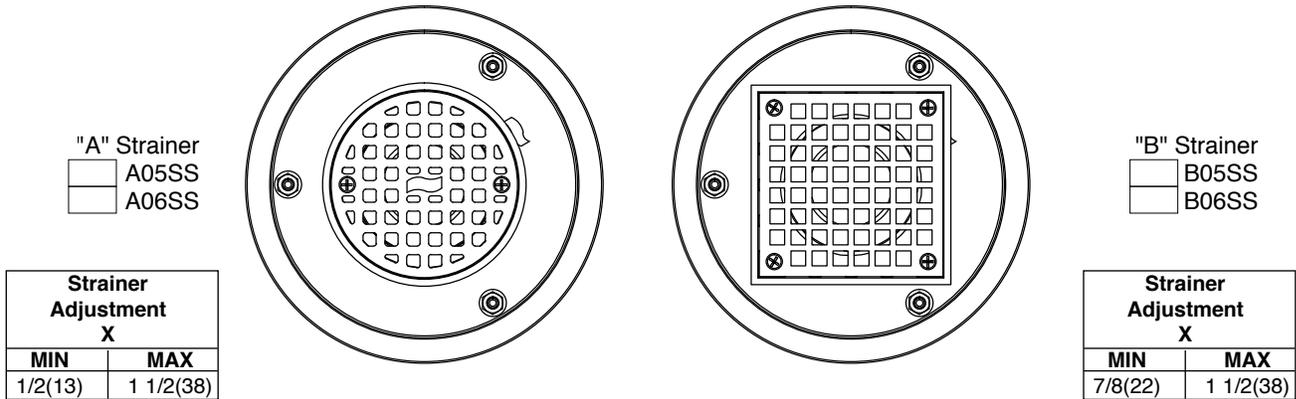

Strainer Adjustment X	
MIN	MAX
1/2(13)	1 1/2(38)

Strainer Adjustment X	
MIN	MAX
7/8(22)	1 1/2(38)

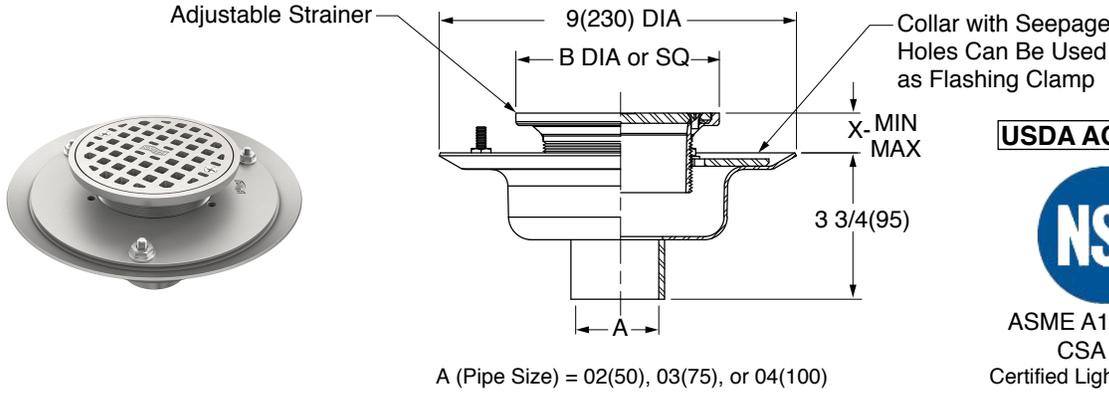

USDA ACCEPTED



ASME A112.6.3 &
CSA B79
Certified Light Duty Load

- Fig. 9600BW BUTTWELDED OUTLET ▲
 - Fig. 9600T THREADED OUTLET
 - Fig. 9600Y NO-HUB OUTLET
- ▲ Schedule 40 Regularly Furnished

Strainer Size B	Free Area SQ IN (SQ CM)	
	ROUND	SQUARE
05(125)	7(45)	6 1/2(42)
06(150)	9(58)	12 1/2(81)



REGULARLY FURNISHED:
14 Gauge Type 304 Stainless Steel Body with Flashing Collar and Adjustable Cast Strainer Head (As Indicated) with No. 4 Finish.

- VARIATIONS:**
- Plastic Sediment Bucket -B
 - Stainless Steel Bucket -SSB
 - Vandal Proof Screws -U
 - Less Seepage Holes -LSH
 - 1/2"(13) Trap Primer Connection -P050
 - USDA Compliant

OPTIONAL MATERIALS:
 Type 316 Stainless Steel -316

SUBJECT TO MANUFACTURING TOLERANCE AND CHANGE WITHOUT NOTICE.

NOTE: Dimensions shown in parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER <h1 style="margin: 0;">9600</h1>