



**JAY R. SMITH MFG. CO.**  
 MEMBER OF MORRIS GROUP INTERNATIONAL  
 POST OFFICE BOX 3237  
 MONTGOMERY, ALABAMA 36109-0237 (USA)  
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



LOCATION

DRAWING NUMBER  
**S2005-Hub-CAN**

SIZE  
**A**

SCALE:  
**NONE**

DATE:  
**05/18/07**

APPROVED BY:  
**AM**


CHECKED BY:  
**AM**

DRAWN BY:  
**JJ**

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

# FLOOR DRAIN WITH HUB ADAPTOR

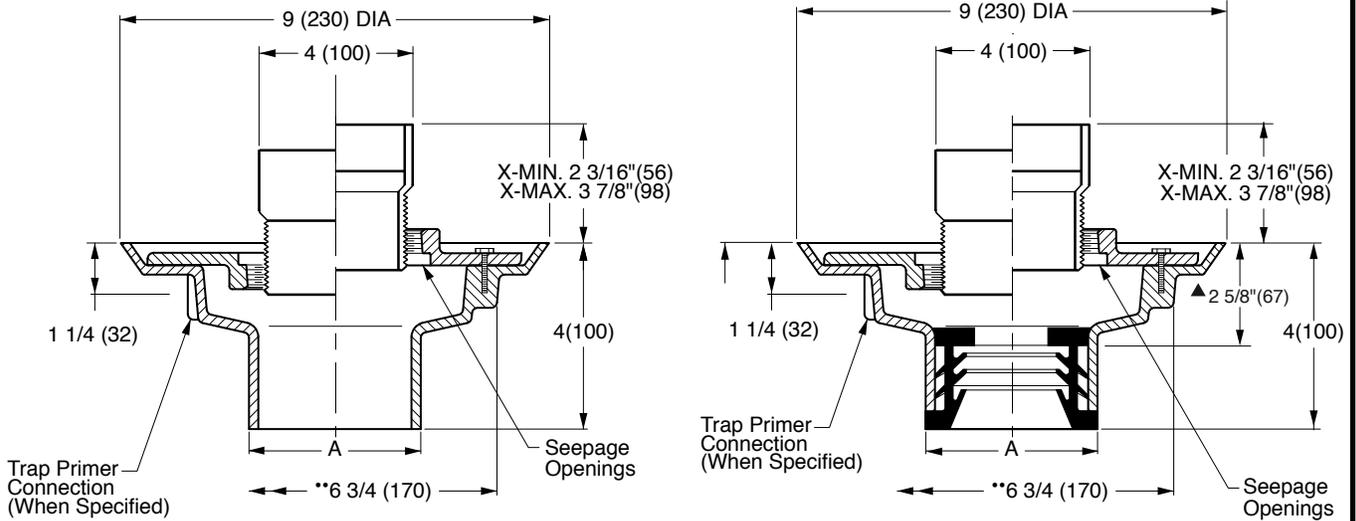

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

**NO-HUB OUTLET**

Fig. 2005Y.....w/Hub

**SPEEDI-SET OUTLET**

Fig. 2005L.....w/Hub

- ▲ This dimension to internal stop of speedi-set gasket.
- Collar is reversible to obtain extreme high and low strainer positions.
- MIN 6 3/4"(170) hole required for core drilled application.

**REGULARLY FURNISHED:**  
 Duct Cast Iron Body with Flashing Collar and Adjustable Cast Iron Soil Pipe Hub Adaptor.

**VARIATIONS**

- L Speedi-Set Service Weight 2(50), 3(75) & 4"(100) only
- LXH Speedi-Set Extra Heavy 2(50), 3(75) & 4"(100) only
- Trap Primer Connection -P050 1/2" (13) & -P075 3/4" (19)
- T Threaded Outlet
- Squeeze In Backwater Valve -V

**OPTIONAL MATERIALS:**

- Bronze Body -BB
- Galvanized Cast Iron Body -G
- Nickel Bronze Hub Adaptor -NB

**NOTE:** Dimensions shown in parentheses are in millimeters.  
 Meets ASME Standard A112.6.3-2001 02(50), 03(75) or 04"(100) sizes only.

**2005-Hub-CAN**

FIGURE NUMBER

REV.	DATE	DESCRIPTION	BY	CKD. BY

WEIGHT POUNDS	VOLUME CUBIC FEET

FIGURE NUMBER  
**2005-Hub-CAN**