



**Whitehall Manufacturing**<sup>®</sup>  
Manufacturer of Healthcare and Rehabilitation Products since 1946

## Extremity Whirlpools

Division of  
Acorn Engineering Company<sup>®</sup>



A MEMBER OF



Use



# E Series 22 Gallon Mobile Whirlpool

**WHE-22-M,  
WHE-22-MU**



WHE-22-MU

**Whitehall E-22-M Mobile Whirlpools** are recommended to facilitate hydrotherapy of the foot and ankle area, and when provided with a raised undercarriage, may also be used for the upper extremities.

**Tank Capacity** is 22 gallons.

**E-22-MU is a Mobile Whirlpool with Undercarriage** of heavy duty construction and fixed height which raises the tank for use in the upper extremities.

**Whirlpool Tank** is 28"L x 15"W x 18"D and is seamless welded construction, fabricated from heavy gauge, type 304 stainless steel, polished to a satin finish. Tank rim is reinforced with a concealed stainless steel rod. Tank bottom is a seamless, coved (rounded) design for effective cleaning.

**Heavy Duty Swivel Casters** support all mobile models. Rear pair of casters are lockable for stabilizing during Whirlpool use.

**Turbine Raising and Lowering Device** permits adjustment of desired height and direction of water agitation towards the area of the body to facilitate hydrotherapy. It is spring balanced and provided with a locking device.

**Turbine Assembly** functions both as agitator and emptying device. It is equipped with Underwriters Laboratory listed 1/2 HP jet pump motor protected with an ABS plastic shell, automatic thermal overload protector, and lifetime-sealed bearings. All parts contacting the water are stainless steel, chrome plated brass or bronze.

**Drain option -SDP** has a bottom drain, leading to a separate, concealed water evacuation pump. A hose is attached to the side of the unit to facilitate the evacuation.

**Thermometer** is provided with a dual scale, adjustable calibration, and a stem inserts into a retainer to prevent rattle during whirlpool agitation.

### GUIDE SPECIFICATIONS

Provide Whitehall Mobile Whirlpool (specify model number and options) with a 22-gallon capacity, 28"L x 15"W x 18"D. Whirlpool shall be fabricated from heavy gauge, type 304 stainless steel. Construction shall be seamless welded and exposed surfaces shall be polished to satin finish. Bottom of tank shall be a seamless, rounded coved design. Whirlpool shall have heavy duty swivel casters with locking device on rear pair of casters. Provide a turbine assembly with raising and lowering device which functions both as agitator and emptying device, permits adjustment of desired height, direction of water agitation, and can be locked into place. Turbine assembly shall be UL listed 1/2 HP jet pump motor with automatic thermal overload protector and lifetime-sealed bearings. Provide a thermometer with a stem retainer to prevent rattling when whirlpool is in operation.

Please visit [www.whitehallmfg.com](http://www.whitehallmfg.com)  
for most current specifications.



Whitehall Mfg. • P.O. Box 3527 • City of Industry, CA 91744 • (800) 591-9280 • (626) 968-6681

**WHE-22-M**

REV: 10/29/2025



## MODEL NUMBER AND OPTION SELECTIONS

### Series

WHE Extremity Series

### Capacity

-22 Gallons

### Type

- M Mobile Whirlpool  
 -M-MU Mobile Whirlpool with Undercarriage

### Turbine Electrical Requirements

- 115VAC / 60Hz (6.2 AMPS)  
 230VAC / 50Hz (3.5 AMPS)


Country of Use \_\_\_\_\_

### For Mixing Valve:

Refer to supplemental MXT15-OTG and DU-1 sheet for details.

### Suffix Options (See Whirlpool Options Section for Details)

- ADH Auxiliary Drain Hose Assembly  
 -EG Enviro-Glaze® Color Powder Coating - Specify Color: \_\_\_\_\_  
<https://www.whitehallmfg.com/enviro-glaze>  
 -GFI Ground Fault Interrupter  
 -HL Hydro Lift (Refer to -HL Page)  
 -LOGO Applied Logos: Team, Facility Company Logo  
 -SDP Separate Drain Pump

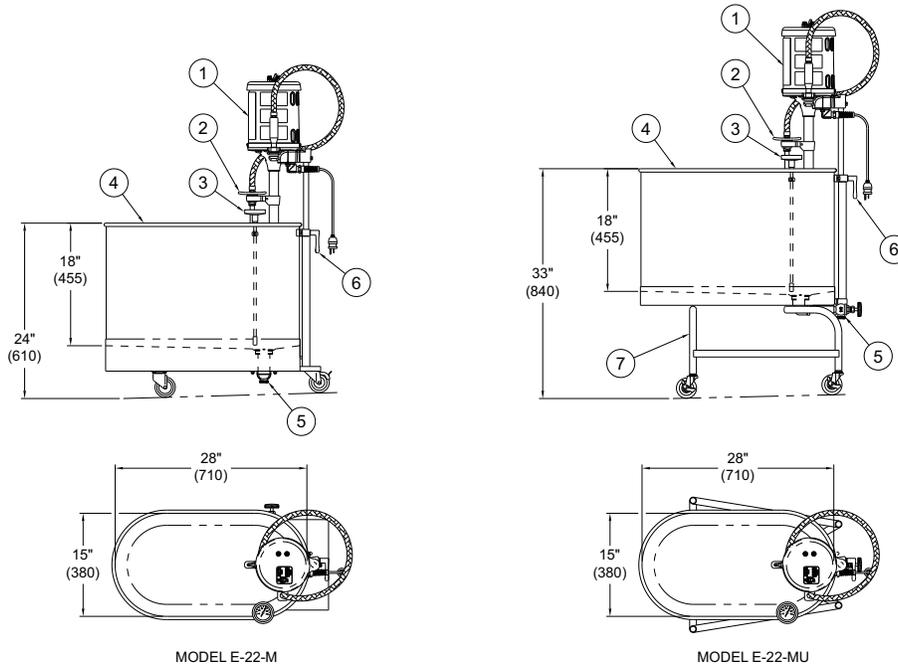

#### NOTES:

- |                              |                                      |
|------------------------------|--------------------------------------|
| 1. 1/2 hp Jet Pump Motor     | 5. Auxiliary Drain Valve             |
| 2. Variable Pressure Control | 6. Turbine Raising & Lowering Device |
| 3. Thermometer               | 7. Optional -MU Undercarriage        |
| 4. Stainless Steel Tank      |                                      |

MOBILE E-22-M SERIES WHIRLPOOL

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or superseded data © Whitehall Manufacturing, Member of Morris Group International. Please visit [www.whitehallmfg.com](http://www.whitehallmfg.com) for most current specifications.

### SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options \_\_\_\_\_ Quantity \_\_\_\_\_  
 Company \_\_\_\_\_ Date \_\_\_\_\_  
 Contact \_\_\_\_\_ Title \_\_\_\_\_  
 Approval for Manufacturing/Signature \_\_\_\_\_