


PROMENADE DECK DRAIN FOR INSULATED "LIQUID" MEMBRANE ROOF DECKS

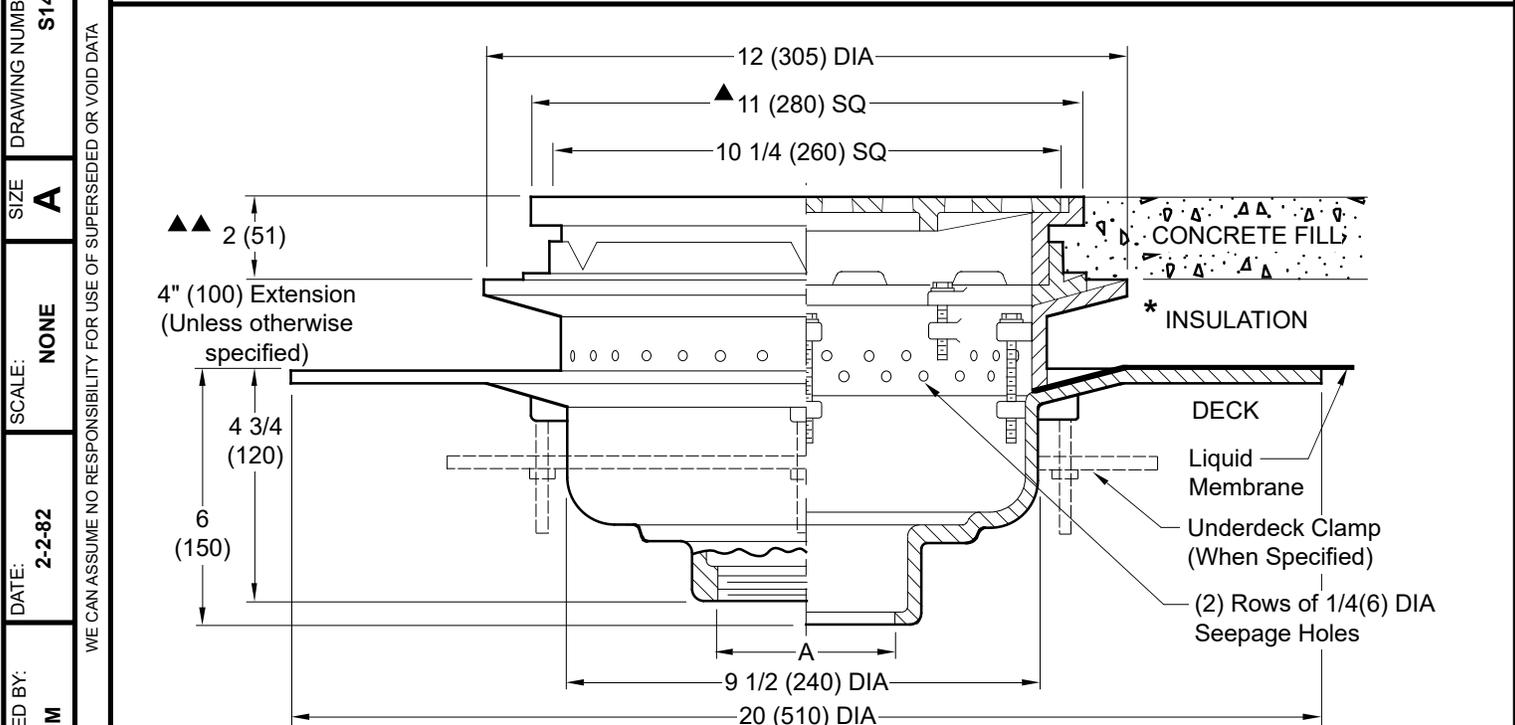

DRAWING NUMBER S1469
 SIZE A
 SCALE: NONE
 DATE: 2-2-82
 APPROVED BY: JM
 CHECKED BY: JM
 DRAWN BY: KG

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

FIGURE NUMBER
1469

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) & 06(150)

- Fig. 1469C CAULK OUTLET
- Fig. 1469T THREADED OUTLET
- Fig. 1469Y NO-HUB OUTLET

- ▲ Add 1/4"(6) when bronze top is specified.
- ▲▲ Add 1/8"(3) when bronze top is specified.

recommended deck opening	
with suffix -R	13(330) DIA
less suffix -R	11(280) DIA

REGULARLY FURNISHED:
 Duco Cast Iron Body and Flashing
 Clamp with Seepage Openings and
 Secured Square Hole ADA Grate.

- VARIATIONS:**
- Extension (Specify Height) -E
 - Expansion Joint (Specify Fig. 1710)
 - "L" Shaped Underdeck Clamp -CL
 - Secondary Flashing Clamp -C2
 - Underdeck Clamp -C
 - Vandal Proof Grate -U
 - L Speedi-Set® Service Weight
02(50), 03(75) & 04"(100) sizes only
 - LXH Speedi-Set® Extra Heavy
02(50), 03(75) & 04"(100) sizes only
 - Heel Proof Grate -HP

- OPTIONAL MATERIALS:**
- Ductile Iron Grate -M
 - Galvanized Cast Iron -G
 - Nickel Bronze Top -NB
 - Polished Bronze Top -PB

* On some systems this layer includes a layer of pea gravel and a layer of insulation.

NOTE: Dimensions shown in parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
N	12-19-24	Revised Dimension Note	HS	JT			1469
M	4-23-24	Revised Variations	HS	CL			
L	4-1-24	Revised Variations	HS	CL			
K	3-8-23	Added @ to "Speedi-Set"	KK	CL			