


GENERAL PURPOSE ROOF DRAINS

WIDE FLANGE BODY WITH SECURED DOME

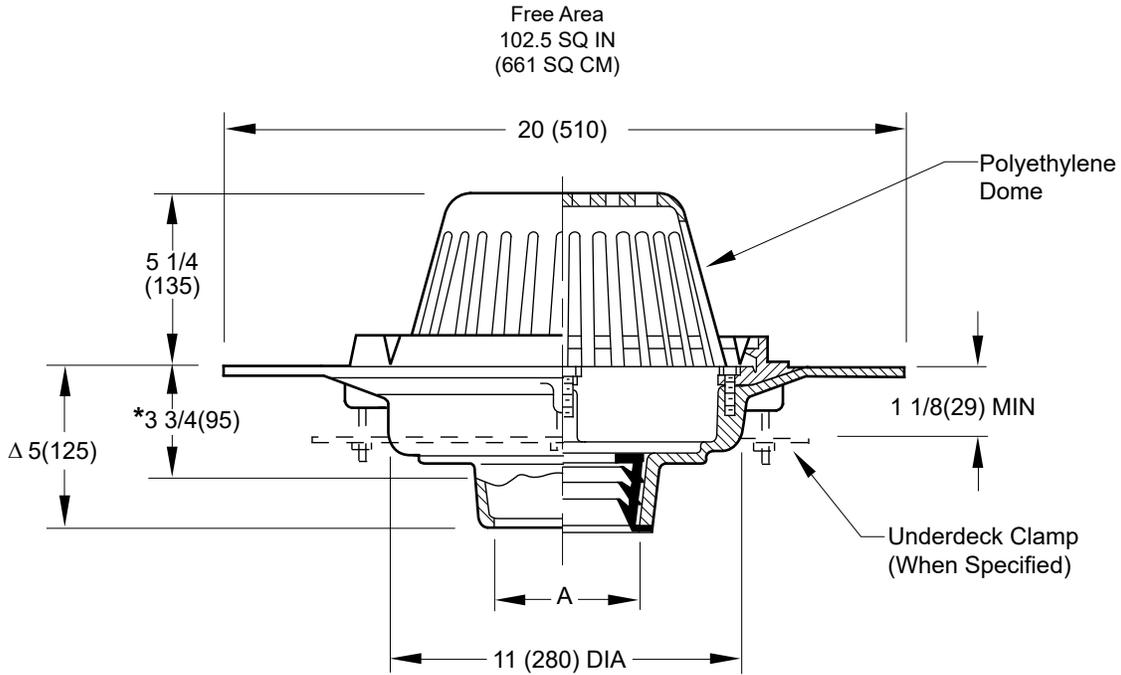

*This Dimension to Internal Stop of Speedi-Set® Gasket.

A (Pipe Size) = 02(50),03(75),04(100),05(125) or 06(150)

Fig. DX1010C CAULK OUTLET
 Fig. DX1010Y NO-HUB OUTLET

REGULARLY FURNISHED:
 Duco Cast Iron Wide Flange Body with Combined Flashing Clamp and Gravel Stop with Polyethylene Dome.

Δ Same for Caulk, NO-HUB and Speedi-Set®. 3 3/4(95) for Threaded
 NOTE: Recommended deck opening 14(355) DIA.

NOTE: Dimensions shown in parentheses are in millimeters.

VARIATIONS:

- "L" Shaped Underdeck Clamp -CL
- L Speedi-Set® Service Weight 02(50), 03(75) & 04"(100) sizes only
- LXH Speedi-Set® Extra Heavy 02(50), 03(75) & 04"(100) sizes only
- Securing Holes -SH
- Underdeck Clamp -C
- Vandal Proof Dome -U
- T Threaded Outlet

OPTIONAL MATERIALS:

- ▲ Aluminum Dome -AD
- ▲ Cast Iron Dome -CID
- ▲ Galvanized Cast Iron Dome -CIDG
- Galvanized Cast Iron Body and Collar -G
- ▲ Rough Bronze Dome -RBD

▲Optional domes' free area are as follows:

Aluminum	98 (632)
Cast Iron	80 (516)
Bronze	95 (613)

DRAWING NUMBER
SDX1010

SIZE
A

SCALE:
NONE

DATE:
8-10-06

APPROVED BY:
CL

CHECKED BY:
CL

DRAWN BY:
TBW

DX1010

FIGURE NUMBER

E D C B	9-29-23 3-9-23 7-30-19 12-2-15	Removed Function Added @ to "Speedi-Set" Removed NOTE Added Flow Rate Note	HS KK MW TBW	CL CL CL BW	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER DX1010
REV.	DATE	DESCRIPTION	BY	CKD. BY			

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE