


GENERAL PURPOSE ROOF DRAINS

8 1/2" (215) DIAMETER - LOW PROFILE DOME

Free Area
 41.5 SQ IN
 (268) SQ CM

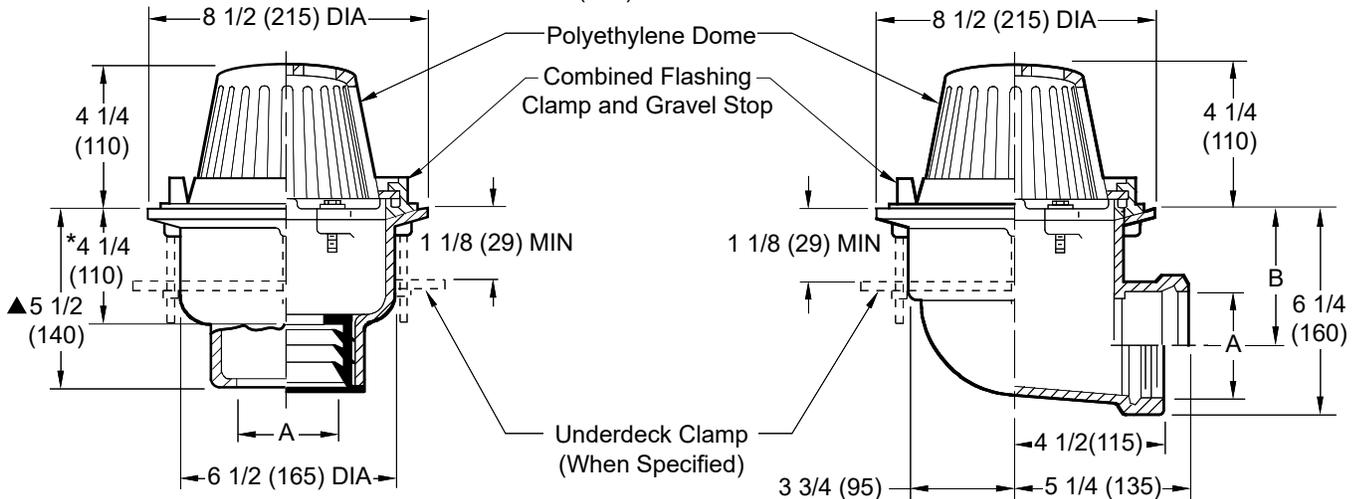

- Fig. 1330C CAULK OUTLET
- Fig. 1330Y NO-HUB OUTLET
- Fig. 1330T THREADED OUTLET

*This Dimension to Internal
 Stop of Speedi-Set® Gasket.
 ▲ Same for Caulk, NO-HUB
 and Speedi-Set®, 4 1/4(110)
 for Threaded.

- Fig. 1340C CAULK OUTLET
- Fig. 1340T THREADED OUTLET

A (Pipe Size) = 02(50), 03(75) or 04(100)

recommended deck opening	
with suffix -R	9(230) DIA
less suffix -R	7 3/4(195) DIA

A SIZE	02 (50)	03 (75)	04 (100)
B	4 1/2 (115)	4 (100)	3 1/2 (89)

REGULARLY FURNISHED:

Duco Cast Iron Body with
 Combined Flashing Clamp and
 Gravel Stop with Polyethylene
 Dome.

VARIATIONS:

- Expansion Joint (Specify Fig. 1710)
(Fig. 1330 only)
- Extension -E (Specify Height)
- "L" Shaped Underdeck Clamp -CL
- L Speedi-Set® Service Weight (Fig. 1330 only)
- LXH Speedi-Set® Extra Heavy (Fig. 1330 only)
- NO-HUB Adaptor (Specify
 Fig. 2646Y) (Fig. 1340 only)
- Secondary Flashing Clamp -C2
- Sump Receiver -R
- Underdeck Clamp -C
- Vandal Proof Dome -U
- Stainless Steel Mesh Over Dome -SSM
- Roof Deck Plate -RDP
- 02(51), 02 1/2(64) Water Dams
 Available -WD02, -WD025

OPTIONAL MATERIALS:

- Aluminum Dome -AD
- Cast Iron Dome -CID
- Galvanized Cast Iron Body & Collar -G
- Galvanized Cast Iron Dome -CIDG
- Rough Bronze Dome -RBD

NOTE: Dimensions shown in
 parentheses are in millimeters.

DRAWING NUMBER
S1330

SIZE
A

SCALE:
NONE

DATE:
5-24-85

APPROVED BY:
TD

CHECKED BY:
TD

DRAWN BY:
TD

1330, 1340

FIGURE NUMBER	P N M L	7-12-24 3-25-24 9-28-23 3-8-23	Revised Variations Revised Variations, Fig. Opts. Removed Function Added ® to "Speedi-Set"	HS HS HS KK	KV CL CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1330, 1340
REV.	DATE	DESCRIPTION	BY	CKD. BY				

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA