



**JAY R. SMITH MFG. CO.®**  
 MEMBER OF MORRIS GROUP INTERNATIONAL  
 POST OFFICE BOX 3237  
 MONTGOMERY, ALABAMA 36109-0237 (USA)  
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com




MEMBER OF:

LOCATION

# GENERAL PURPOSE ROOF DRAIN

## 12" (305) DIAMETER - LOW PROFILE DOME

Free Area  
 71.50 SQ IN  
 (461) SQ CM

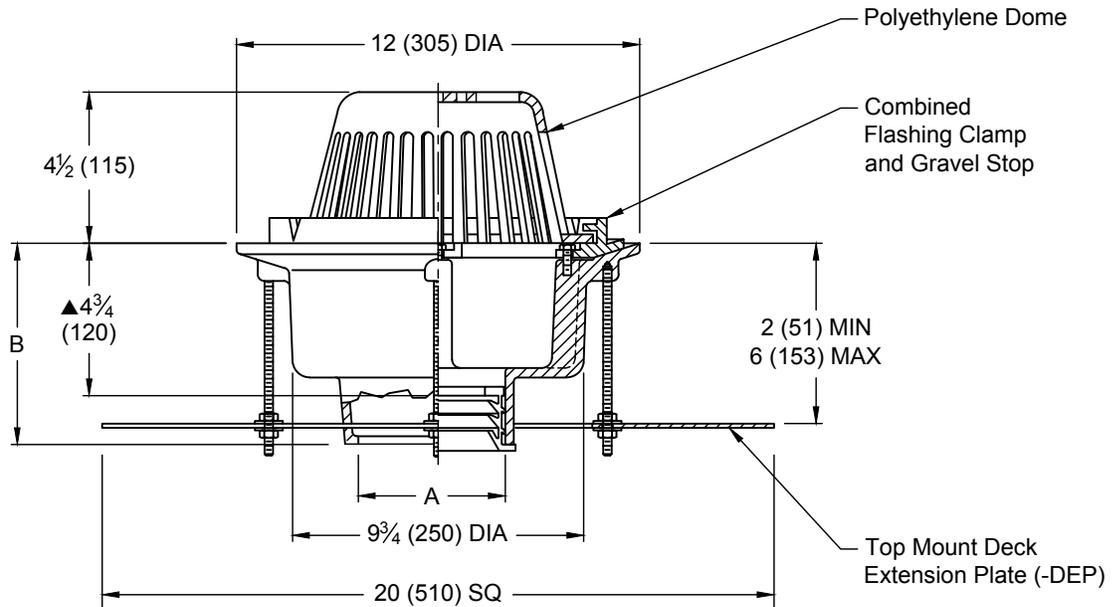

▲ This dimension to internal stop for Speedi-Set® gasket.

A SIZE	02 (50)	03 (75)	04 (100)	05 (125)	06 (150)
B	6 (150) for Caulk, NO-HUB and Speedi-Set® 4 3/4 (120) for Threaded				

Recommended Deck Opening  
 13(330) Dia.

- Fig. 1310C-DEP. . . . .CAULK OUTLET
- Fig. 1310T-DEP. . . . .THREADED OUTLET
- Fig. 1310Y-DEP. . . . .NO-HUB OUTLET

**REGULARLY FURNISHED:**  
 Duco Coated Iron Body with Top Mount Deck Extension Plate, Combined Flashing Clamp and Gravel Stop and Polyethylene Dome.

- VARIATIONS:**
- Vandal Proof Dome -U
  - Solid Water Dam Collar -WD02
  - L Speedi-Set® Service Weight (02(50), 03(75), 04(100) Sizes Only)
  - LXH Speedi-Set® Extra Heavy (02(50), 03(75) and 04(100) Sizes Only)

- OPTIONAL MATERIALS:**
- Cast Iron Dome -CID
  - Aluminum Dome -AD
  - Galvanized Cast Iron Body and Collar -G
  - Galvanized Cast Iron Dome -CIDG
  - Rough Bronze Dome -RBD

NOTE: Dimensions shown in parentheses are in millimeters

DRAWING NUMBER  
 s1310-DEP

SIZE  
 A

SCALE:  
 NONE

DATE:  
 8-12-2020

APPROVED BY:  
 CL

CHECKED BY:  
 CL

DRAWN BY:  
 MW

1310-DEP

FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

A	3-8-23	Added ® to "Speedi-Set"	KK	CL
REV.	DATE	DESCRIPTION	BY	CKD. BY

WEIGHT POUNDS	VOLUME CUBIC FEET
---------------	-------------------

FIGURE NUMBER  
**1310-DEP**