


D
 DRAWING NUMBER s2679
 SIZE A
 SCALE: NONE
 DATE: 7-20-09
 APPROVED BY: CR
 CHECKED BY: BW
 DRAWN BY: RN
 2679
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

PLANTER DRAIN

CAST IRON ROUND TOP WITH ANTI-TILT GRATE

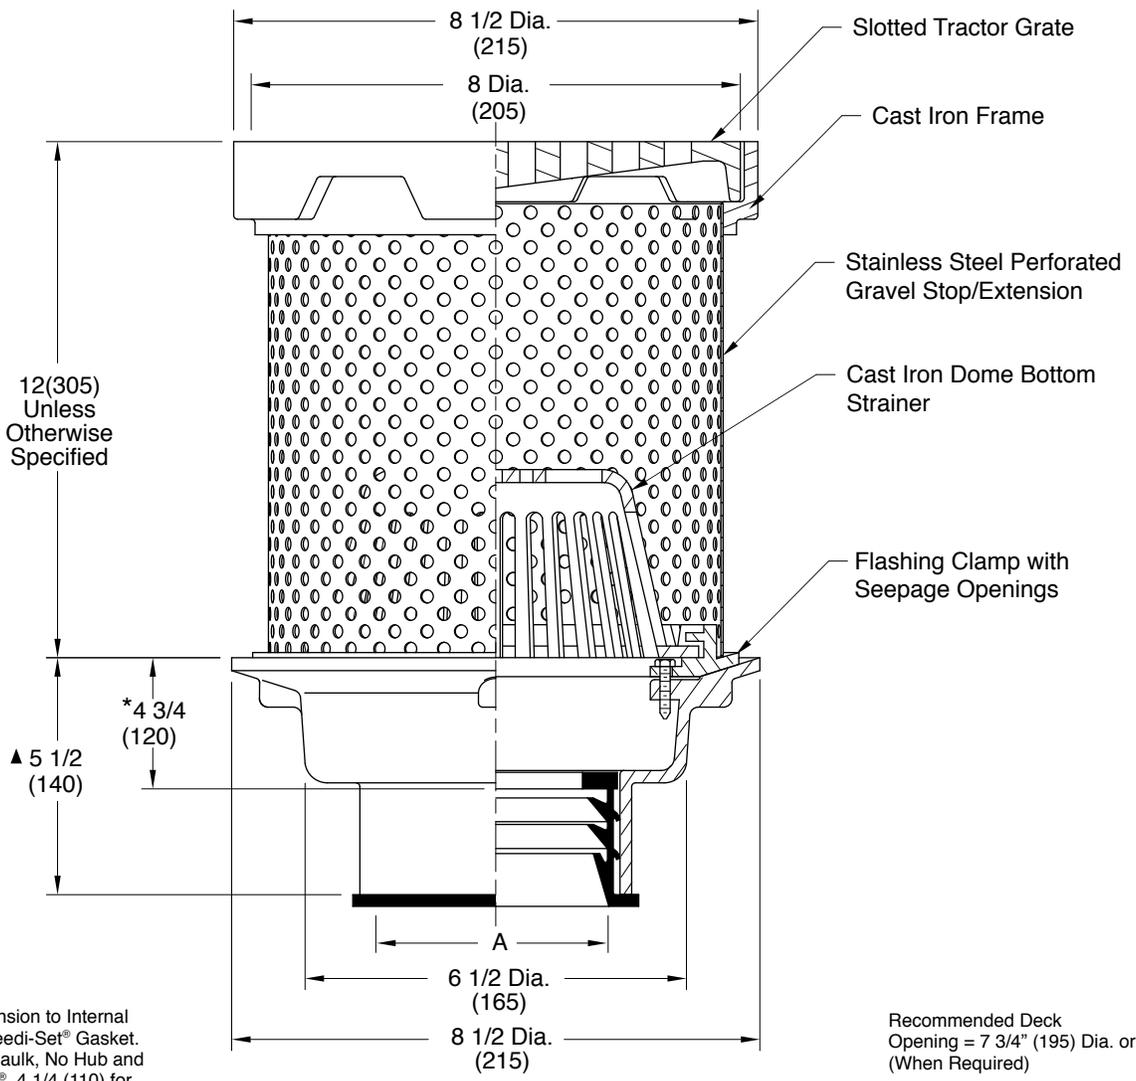

* This Dimension to Internal Stop of Speedi-Set® Gasket.
 ▲ Same for Caulk, No Hub and Speedi-Set®, 4 1/4 (110) for Threaded.

Recommended Deck Opening = 7 3/4" (195) Dia. or Sq. (When Required)

A (PIPE SIZE) = 02 (50), 03 (75) or 04 (100)

Fig. 2679C CAULK OUTLET
 Fig. 2679Y NO HUB OUTLET

REGULARLY FURNISHED:

Duco Coated Cast Iron Body, Flashing Clamp, and Dome Bottom Strainer with Stainless Steel Gravel Stop/Top Extender with Cast Iron Top Frame and Anti-Tilt Loose-Set Slotted ADA Grate.

VARIATIONS:

- L Speedi-Set® Service Weight Outlet Conn.
- LXH Speedi-Set® Extra Heavy Outlet Conn.
- T Threaded Outlet Conn.
- Vandal Proof Grate -U
- Dome Grate -D

OPTIONAL MATERIALS:

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
D	3-13-23	Added ® to Speedi-Set	KK	CL			2679
C	1-23-23	Added ADA	KK	JT			
B	8-17-18	Revised Height Callout	TBW	TWK			
A	8-5-14	Revised Variations	TBW	CL			