


PROMENADE DECK DRAINS

SMALL - 8" (205) SQUARE

Load Rating: Light Duty having a Safe Live (Static) Load less than 2,000 lbs. (900 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

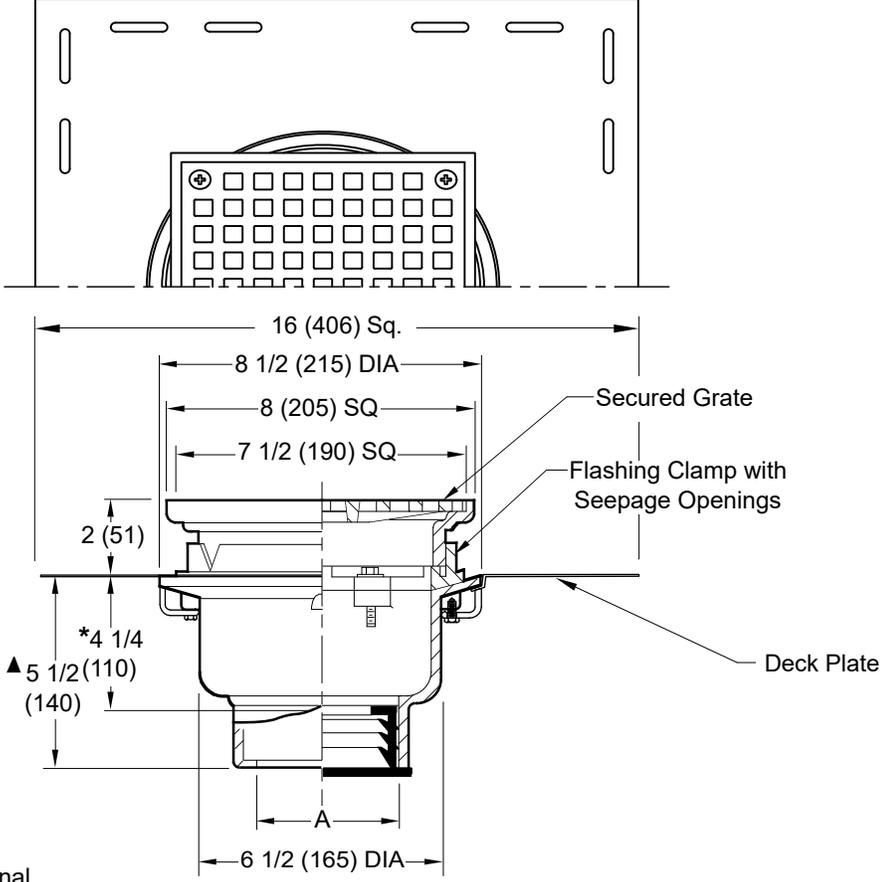

Free Area
19 SQ IN
(123) SQ CM

*This Dimension to Internal Stop of Speedi-Set® Gasket.
 ▲ Same for Caulk, NO-HUB and Speedi-Set® 4 1/4(110) for Threaded.

A (Pipe Size) = 02(50), 03(75) or 04(100)
 Fig. 1470C-RDP CAULK OUTLET
 Fig. 1470Y-RDP NO-HUB OUTLET

recommended deck opening 9(230) DIA
--

REGULARLY FURNISHED:
 Duco Cast Iron Body with Attached Deck Plate and Flashing Clamp with Seepage Openings and Secured Square Hole Light Duty ADA Grate.

- VARIATIONS:**
- Expansion Joint (Specify Fig. 1710)
 - Extension (Specify Height) -E
 - L Speedi-Set® Service Weight
 - LXH Speedi-Set® Extra Heavy
 - Vandal Proof Grate -U
 - T Threaded Outlet
 - Heel Proof -HP
 - Secondary Flashing Clamp -C2
 - Bucket -B

- OPTIONAL MATERIALS:**
- Ductile Iron Grate -M
 - Galvanized Cast Iron -G
 - Nickel Bronze Top -NB
 - Polished Bronze Top -PB

NOTE: Floor drains or area drains, when used to drain exterior areas (subject to rainfall) should have an open area equal to twice the cross sectional area of the connecting pipe.

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S1470-RDP
 SIZE A
 SCALE: NONE
 DATE: 2-8-24
 APPROVED BY: CL
 CHECKED BY: CL
 DRAWN BY: HS
1470-RDP
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

FIGURE NUMBER	A	5-9-25	Revised Variations	TB	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
	REV.	DATE	DESCRIPTION	BY	CKD. BY			1470-RDP