

PLANTING AREA DRAIN

FOR LARGE AREAS

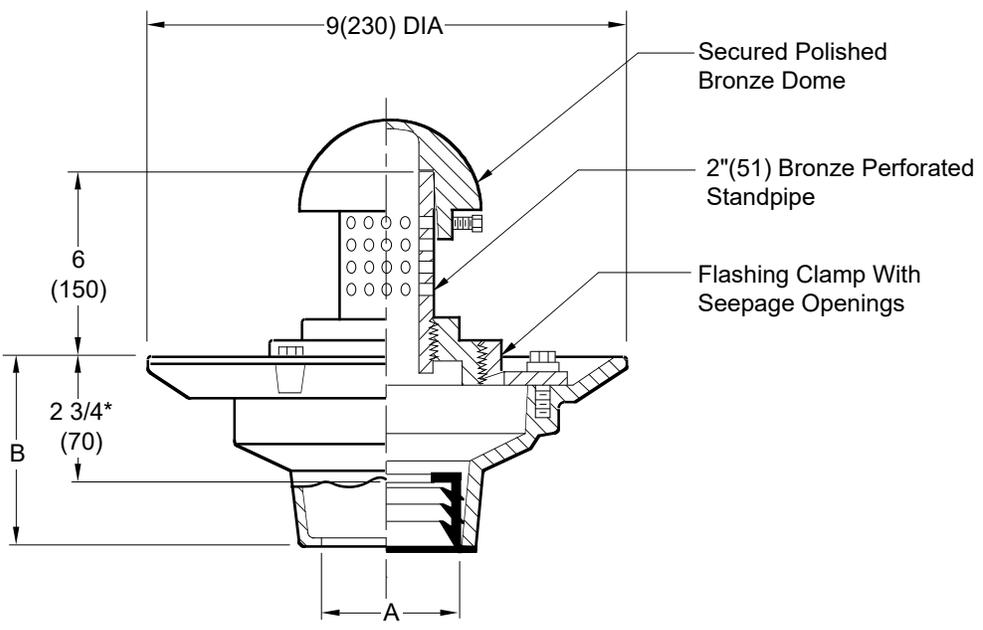


Fig. 2680C . . . CAULK OUTLET
 Fig. 2680Y . . . NO-HUB OUTLET

*This dimension to Internal Stop of Speedi-Set® Gasket.

NOTE: Clamp can be reversed.

A SIZE	02(50)	03(80)	04(100)
B	4(100) for Caulk, NO-HUB and Speedi-Set® 3(76) for Threaded		

DRAWING NUMBER **S2680**
 SIZE **A**
 SCALE: **NONE**
 DATE: **5-17-85**
 APPROVED BY: **TD**
 CHECKED BY: **TD**
 DRAWN BY: **PJ**
2680
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REGULARLY FURNISHED:
 Duco Cast Iron Body and Flashing Clamp with Bronze Standpipe and Polished Bronze Dome.

NOTE: Dimensions shown in parentheses are in millimeters.

- VARIATIONS:**
- Longer Standpipe (When Specified)
 - Solid Standpipe -SP
 - Standpipe Covered w/SS Mesh -SSM
 - L Speedi-Set® Service Weight
 - LXH Speedi-Set® Extra Heavy
 - T Threaded Outlet

- OPTIONAL MATERIALS:**
- Chrome Plated Dome -CPD
 - Galvanized Body -G
 - Nickel Bronze Dome and Stainless
 - Steel Standpipe -NBD
 - Rough Bronze Dome -RBD

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2680
D	8-10-23	Removed Function	HS	CL			
C	3-13-23	Added ® to Speedi-Set	KK	CL			
B	5-22-95	Revised and added millimeters	CMB	BS			
A	11-17-93	Submittal Update	EMB	BS			