


SPECIAL PURPOSE DRAIN

SPECIAL PLANTER DRAIN

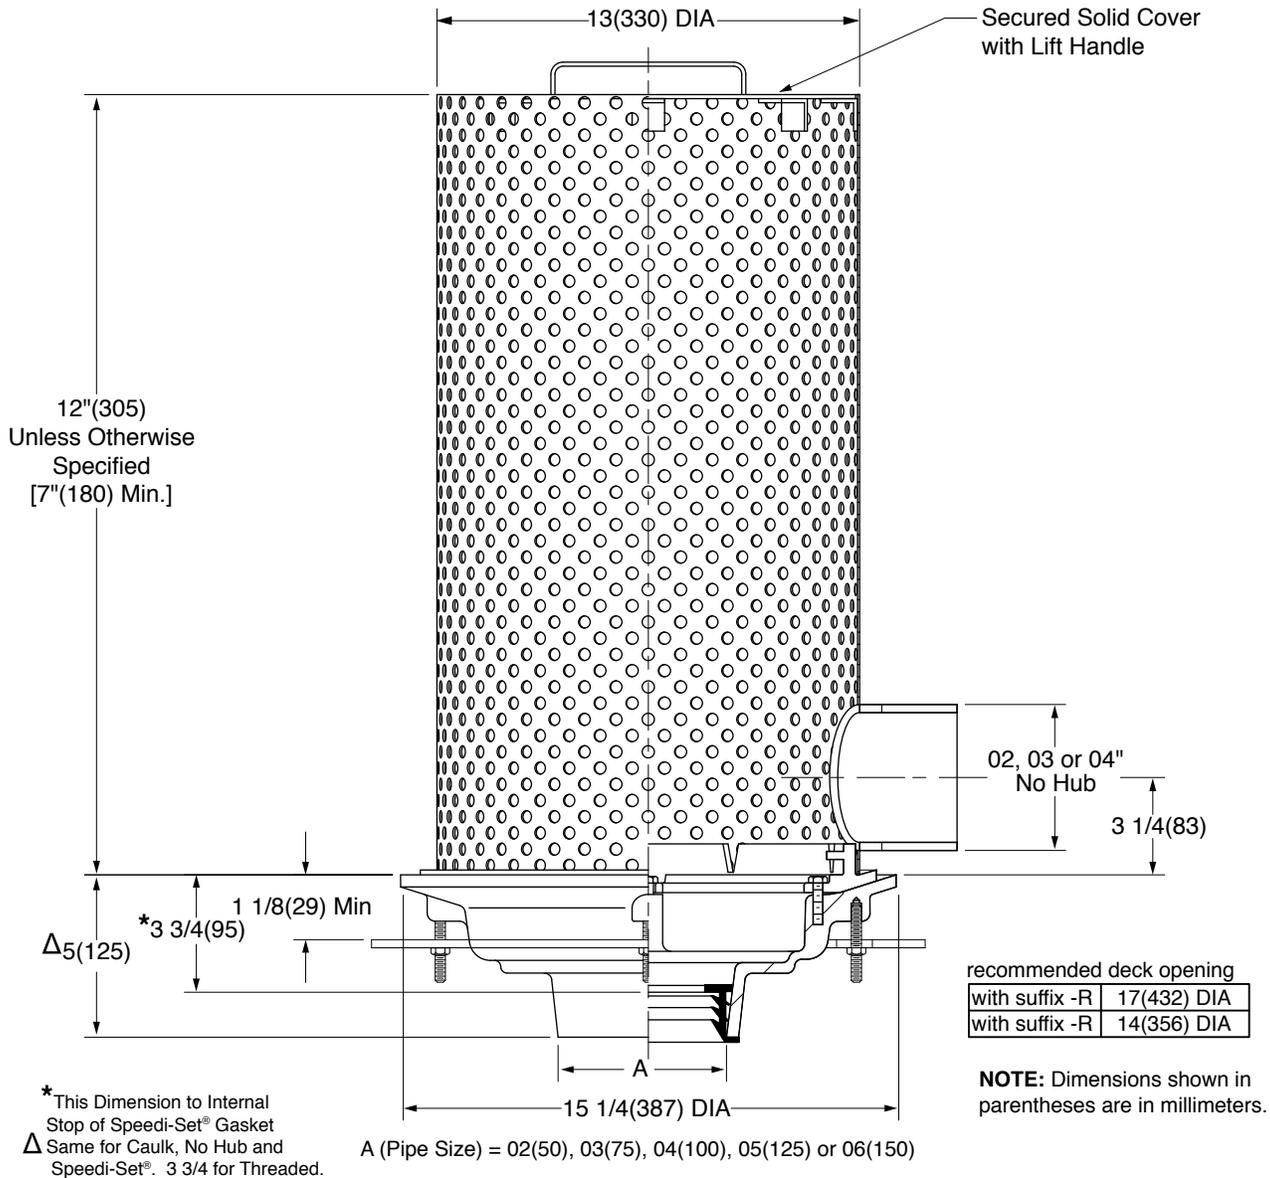

*This Dimension to Internal Stop of Speedi-Set® Gasket
 Δ Same for Caulk, No Hub and Speedi-Set®. 3 3/4 for Threaded.

- Fig. 1913Y.....NO HUB OUTLET
- Fig. 1913C.....CAULK OUTLET

REGULARLY FURNISHED:

Duco coated cast iron body and flashing collar with perforated stainless steel sleeve with auxiliary side inlet and solid cover with lift handle.

VARIATIONS:

- T Threaded Outlet
- L Speedi-Set® Service Weight (02, 03, & 04" Sizes Only)
- LXH Speedi-Set® Extra Heavy (02, 03, & 04" Sizes Only)

OPTIONAL MATERIALS:

- Galvanized Cast Iron -G
- Stainless Steel -SS

C
 DRAWING NUMBER s1913
 SIZE A
 SCALE: NONE
 DATE: 2-10-10
 APPROVED BY: CLR
 CHECKED BY: TK
 DRAWN BY: CLR
 1913
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
C	3-8-23	Added ® to "Speedi-Set"	KK	CL			1913
B	2-27-12	Rev. Dimensions	TBW	BW			
A	2-15-10	Formerly SQ-1-3934	TBW	TWK			