

DEEP SUMP ROOF DRAIN WITH DUAL OUTLET

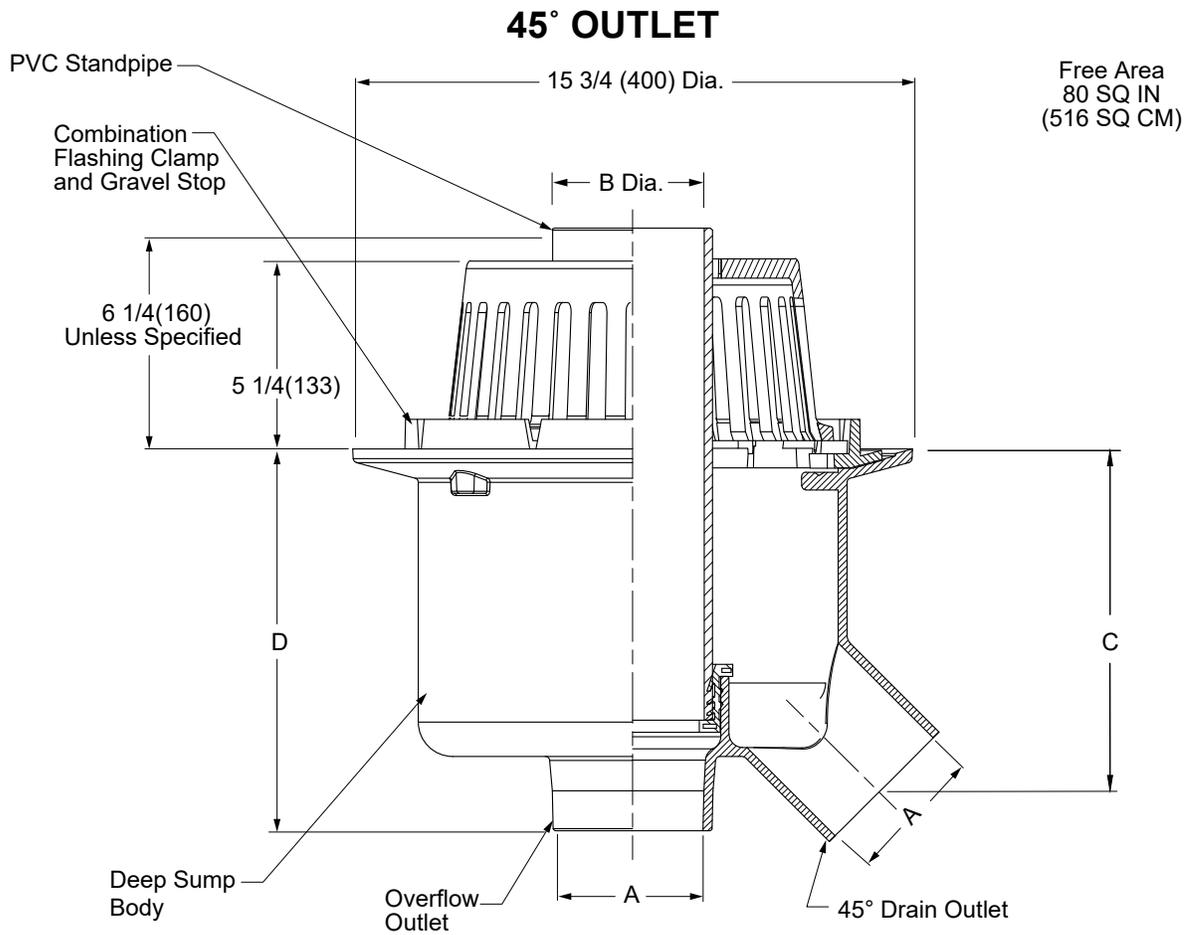


Fig. 1077Y-45.....NO-HUB Outlet

Recommended Deck Opening

with suffix -RDP	17 (430) Dia.
less suffix -RDP	15 (381) Dia.

Deck must also be notched for 45° Outlet

A Pipe Size	B Dia.	C	D
02(50)	4(100)	9 1/2(241)	10 3/4(273)
03(75)	4(100)	9 3/4(248)	10 3/4(273)
04(100)	4(100)	9 1/2(241)	10 3/4(273)
06(150)	6(150)	8 3/8(213)	11 1/8(282)

REGULARLY FURNISHED:
 Duco Coated Cast Iron Body with 45° Side Outlet Drain Connection and Bottom Outlet Overflow Connection with Standpipe Type Overflow, Combined Flashing Clamp and Gravel Stop and Cast Iron Dome.

- VARIATIONS:**
- Vandal Proof Dome -U
 - Top Mount Deck Plate -RDP
 - Overflow Pipe Dome -OFD
 - Extension -E
 - Cast Iron Standpipe -CIS
 - S.S. Gravel Guard -GG (Specify Height)
 - Sump Receiver -R
 - Underdeck Clamp -C

- OPTIONAL MATERIALS:**
- Polyethylene Dome -PD
 - Rough Bronze Dome -RBD
 - Stainless Steel Mesh Covered Dome -SSM
 - Galvanized Cast Iron -G

NOTE: Dimensions shown in Parentheses are in millimeters.

DRAWING NUMBER: S1077-45
 SIZE: A
 SCALE: NONE
 DATE: 9-14-16
 APPROVED BY: CL
 CHECKED BY: CL
 DRAWN BY: TBW
 FIGURE NUMBER: 1077-45
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1077-45
------	------	-------------	----	---------	------------------	----------------------	---------------------------------

D
 DRAWING NUMBER **S1077-45 BackSheet**
 SIZE **A**
 SCALE: **NONE**
 DATE: **9-14-16**
 APPROVED BY: **CL**
 CHECKED BY: **CL**
 DRAWN BY: **TBW**
 FIGURE NUMBER **1077-45 (Back Sheet)**

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

DEEP SUMP ROOF DRAIN WITH DUAL OUTLET

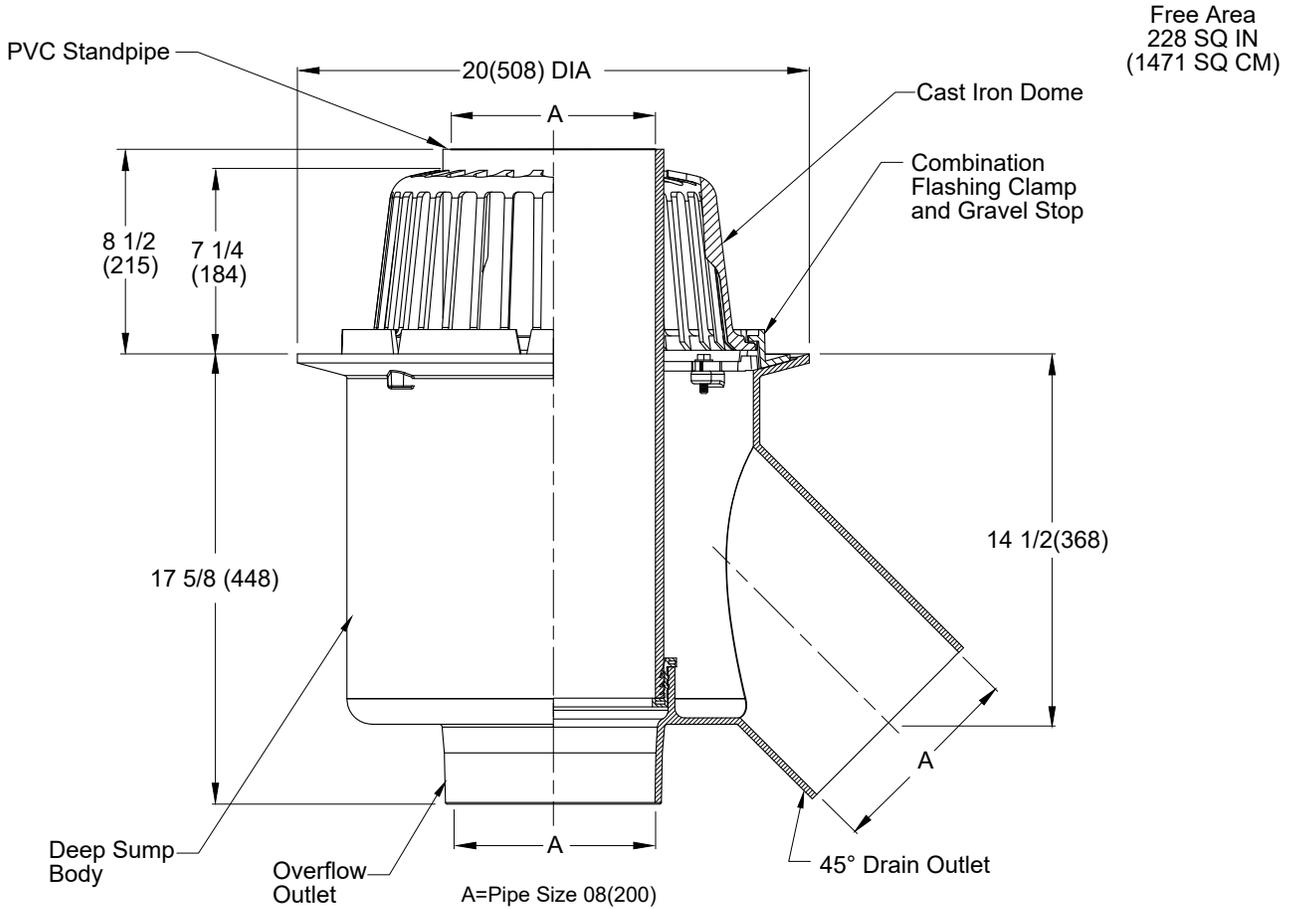


Fig. 1077Y08(-45).....NO-HUB Outlet

Recommended Deck Opening

with suffix -RDP	18 3/4(475) Dia.
less suffix -RDP	21(535) Dia.

Deck must also be notched for 45° Outlet

REGULARLY FURNISHED:
 Duco Coated Cast Iron Body with 45° Side Outlet Drain Connection and Bottom Outlet Overflow Connection with Standpipe Type Overflow, Combined Flashing Clamp and Gravel Stop and Cast Iron Dome.

- VARIATIONS:**
- Vandal Proof Dome -U
 - Top Mount Deck Plate -RDP
 - Overflow Pipe Dome -OFD
 - Extension -E
 - Cast Iron Standpipe -CIS
 - S.S. Gravel Guard -GG (Specify Height)
 - Sump Receiver -R
 - Underdeck Clamp -C

- OPTIONAL MATERIALS:**
- Aluminum Dome -AD
 - Stainless Steel Mesh
 - Covered Dome -SSM
 - Galvanized Cast Iron -G

NOTE: Dimensions shown in Parentheses are in millimeters.

D	3-6-25	Revised Variations	HS	KV	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1077-45 (Back Sheet)
C	2-28-24	Revised Variations, Optional Mat.	HS	CL			
B	7-18-23	Removed Note, Changed B.S.	HS	CL			
A	10-11-22	Changed 7 1/2 to 8 1/2	KK	CR			
REV.	DATE	DESCRIPTION	BY	CKD. BY			