
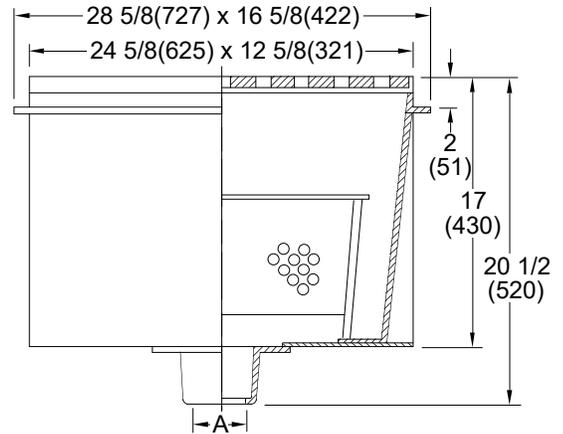


# SANI-CEPTOR® ACID RESISTANT COATED FLOOR & INDIRECT WASTE DRAINS

## RECTANGULAR A.R. COATED NON-TRAFFIC TOP 24 (610) x 12 (305) TOP-EXTRA LARGE DEEP RECEPTORS

Conforms to ASME A112.6.7/CSA B79.7

Free Area  
 125 SQ IN  
 (807) SQ CM

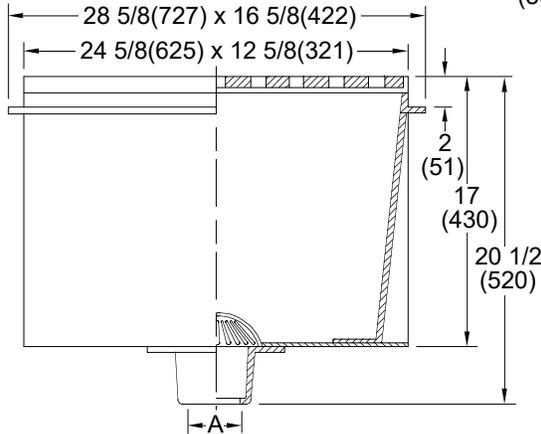

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

WITH DOME BOTTOM STRAINER

WITH SEDIMENT BUCKET

- |  |                          |
|--|--------------------------|
| <input type="checkbox"/> Fig. 3482C . . . . . CAULK OUTLET . . . . . Fig. 3483C  | <input type="checkbox"/> |
| <input type="checkbox"/> Fig. 3482Y . . . . . NO-HUB OUTLET . . . . . Fig. 3483Y | <input type="checkbox"/> |

### FEATURES, OPTIONS & ORDERING INFORMATION

**REGULARLY FURNISHED:** Fabricated Steel Flanged Receptor with Acid Resistant Coated Interior with Loose Set Acid Resistant Coated Grates, Aluminum Dome Bottom Strainer or Stainless Steel Sediment Bucket as Indicated by Figure Number.

**VARIATIONS:**

- Flashing Clamp -C
- Acid Resistant Coated Flat Bottom Strainer -FBS
- S.S. Mesh Lined Bucket -BS
- Vandal Proof Screws -U
- 1/2" (13) Trap Primer Connection -P050

**OPTIONAL MATERIALS:**

- All Galvanized -G
- All Duco Coated Receptor -CI

**NOTE:** This grate is not recommended for any type of traffic including pedestrian traffic.

### OPTIONAL TOP GRATES/COVERS FOR INDIRECT WASTE APPLICATIONS

**SUFFIX**

| NUMBER                       | DESCRIPTION                                     |
|------------------------------|---|
| <input type="checkbox"/> -10 | LESS GRATE                                      |
| <input type="checkbox"/> -12 | WITH 1/2 GRATE                                  |
| <input type="checkbox"/> -13 | WITH 3/4 GRATE                                  |
| <input type="checkbox"/> -14 | WITH GRATE WITH 2 1/2 (64) SQ CENTER HOLE       |
| <input type="checkbox"/> -41 | WITH SOLID COVER                                |
| <input type="checkbox"/> -42 | WITH 1/2 SOLID COVER                            |
| <input type="checkbox"/> -43 | WITH 3/4 SOLID COVER                            |
| <input type="checkbox"/> -44 | WITH SOLID COVER WITH 2 1/2"(64) SQ CENTER HOLE |

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S3482  
 SIZE A  
 SCALE: NONE  
 DATE: 5-15-89  
 APPROVED BY: SJM  
 CHECKED BY: SB  
 DRAWN BY: EMB  
**3482, 3483**  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

|                  |   |  |                      |                      |                  |                      |                                    |
|------------------|---|--|----------------------|----------------------|------------------|----------------------|------------------------------------|
| R<br>Q<br>P<br>N | 1-28-26<br>4-19-24<br>10-18-23<br>7-26-23 | Revised Variations and Text<br>Added ASME Note<br>Added Optional Grates/Covers<br>Removed Function | TB<br>HS<br>HS<br>HS | CL<br>BW<br>CL<br>CL | WEIGHT<br>POUNDS | VOLUME<br>CUBIC FEET | FIGURE NUMBER<br><b>3482, 3483</b> |
| REV.             | DATE                                      | DESCRIPTION  | BY                   | CKD. BY              |                  |                      |                                    |