


ROOF DRAINS

IRMA ROOF APPLICATIONS

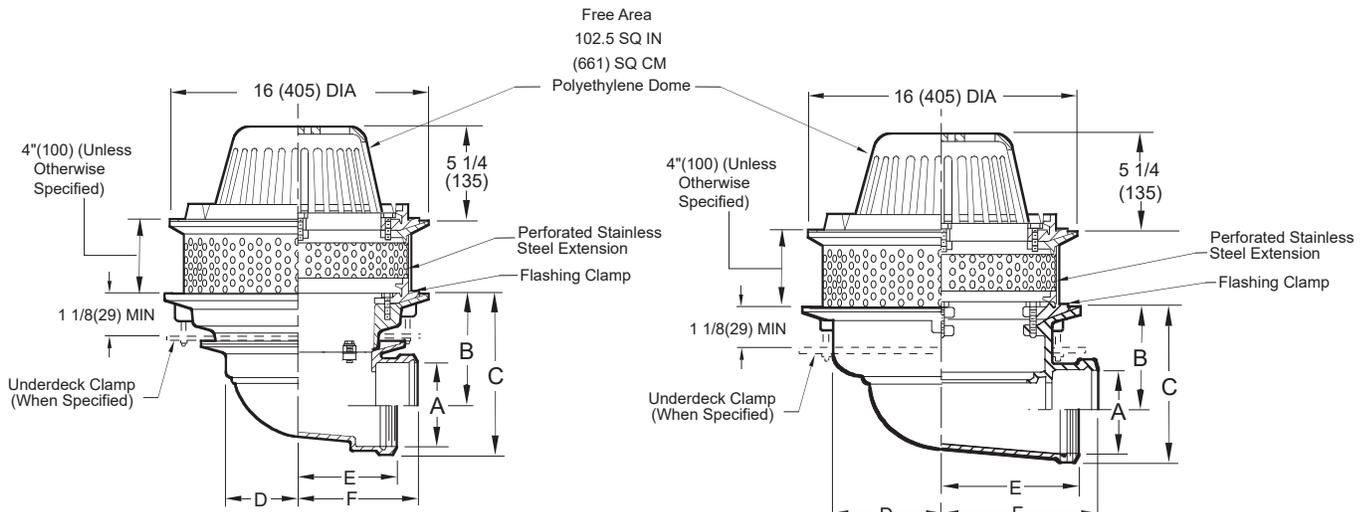

A= 02(50), 03(75), 04(100)

A= 05(125), 06(150)

Fig. 1027C ... CAULK OUTLET
 Fig. 1027T ... THREADED OUTLET

recommended deck opening

with suffix -R	17(430) DIA
less suffix -R	14(355) DIA

NOTE: Dimensions shown in parentheses are in millimeters.

A SIZE	02 (50)	03 (75)	04 (100)	05 (125)	06 (150)
B	6 7/8 (175)	6 3/8 (162)	5 7/8 (149)	5 (125)	4 1/2 (115)
C	8 5/8 (219)	8 3/4 (220)	8 3/4 (220)	8 1/2 (215)	8 1/2 (215)
D	4 3/4 (120)	4 3/4 (120)	4 3/4 (120)	6 1/4 (160)	6 1/4 (160)
E	6 (150)	6 (150)	6 (150)	6 7/8 (175)	6 7/8 (175)
F	7 3/4 (195)				

▲ Optional domes' free area are as follows:
 Aluminum 98 (632)
 Cast Iron 80 (516)
 Bronze 95 (613)

REGULARLY FURNISHED:

Duco Cast Iron Body with Flashing Clamp, Perforated Stainless Steel Extension, Gravel Stop and Polyethylene Dome.

VARIATIONS:

- Extension -E (Specify Height)
- "L" Shaped Underdeck Clamp -CL
- Sump Receiver -R
- Underdeck Clamp -C
- Vandal Proof Dome -U

OPTIONAL MATERIALS:

- ▲ Aluminum Dome -AD
- ▲ Cast Iron Dome -CID
- Galvanized Cast Iron Body & Collar -G
- ▲ Galvanized Cast Iron Dome -CIDG
- ▲ Rough Bronze Dome -RBD

DRAWING NUMBER S1027
 SIZE A
 SCALE: NONE
 DATE: 10/25/00
 APPROVED BY: CEL
 CHECKED BY: CL
 DRAWN BY: RN
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 FIGURE NUMBER 1027

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
B A	9-27-23 06/03/09	Removed Function Added Optional Dome Notes	HS JJ	CL CL			1027