

SIPHONIC GUTTER DRAIN

6" (150) DIAMETER - LOW PROFILE GUTTER DRAIN

DRAWING NUMBER S1605

SIZE A

SCALE: NONE

DATE: 4-14-06

APPROVED BY: CR

CHECKED BY: CR



DRAWN BY: RN

FIGURE NUMBER 1605

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

Free Area
5.42 Sq. In.
(35) Sq. Cm.

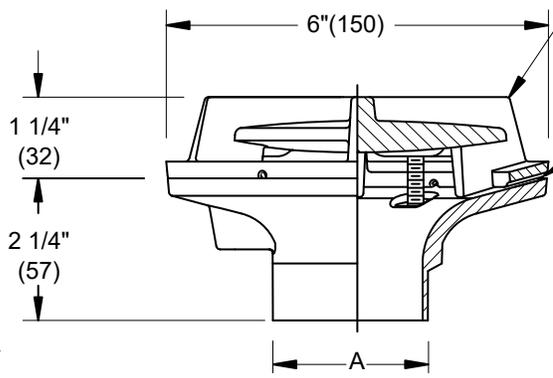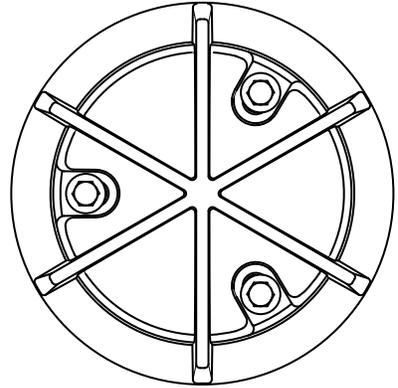

A(Pipe Size) = 02(50)

Combination Flashing
Clamp and Air Baffle

Seepage Openings

- NOTES:**
1. Drain shall be installed per local code requirements
 2. Dimensions shown in parentheses are in millimeters.
 3. Only for use in engineered siphonic roof drainage systems.

Performance Data *		
Size (A) in(mm)	Max Capacity cfs (lps)	Resistance Value, K
02 (50)	0.40 (11.3)	0.66

Fig. 1605Y NO-HUB OUTLET

REGULARLY FURNISHED:
Duco Cast Iron Body with
Combination Flashing Clamp and
Air Baffle.

VARIATIONS:
 Vandal Proof -U

OPTIONAL MATERIALS:
 Galvanized Cast Iron -G

U.S. Patent No. D576,257S

*As tested and certified by ANSI/ASME A112.6.9
"Siphonic Roof Drains" procedures and test
apparatus.
IAPMO Listed File No. 5138

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1605
		Removed Function Removed Threaded Outlet from Fig. Added Note Added Patent No.	HS KK KK RN	CL CL CL CL			