



PFAS Water Filter

Model # WF3000

3rd Party Verified Conformance For The Following:

- NSF/ANSI 53 for Cyst and Total PFAS Reduction Including: PFOA, PFOS, PFHpA, PFHxS, PFNA *
 (* Meets EPA requirements when supply water is less than 390 PPT)
- NSF/ANSI 42+53 for Lead Reduction
- NSF/ANSI 42 Including Particulate Class 1
- NSF/ANSI 401 for Reduction of Microplastics
- ASTM F838-20 for Bacteria Removal to 0.1 Micron (99.9%)**
 (** SGS Certified to comply with ASTM F838-20)
- Two Stage Hollow Core Fiber & Carbon Block Technology Provides Superior Filtration versus Single Stage Designs
- Easy 1/4 Turn Filter Head with Auto-Shut Off
- Filter Head Assembly with Quick Connect Inlet and Outlet
- Maximum Flow Rate 1.5 GPM to Meet Filter Specifications (Refer to Product Submittal for Fixture Flow Rates)



Model WF3000 is a Two Stage PFAS Water Filter Assembly with Hollow Core Fiber and Carbon Block Technology intended for use with Whitehall® Drinking Fountains, Water Coolers and Bottle Fillers. Filter Head includes a Quick Connect Quarter-turn Couplers with auto-shut off feature for easy replacement. Third Party Filter verification includes compliance to ASTM F838-20 and NSF/ANSI 42+53 with reduction to 0.1 micron of sediment, chlorine, bacteria (cyst), and lead. Filter provides total PFAS reduction including PFOA, PFOS, PFHpA, PFHxS, and PFNA. Certifications include compliance with NSF/ANSI 401 for reduction of Microplastics. Life span capacity is 3000 gallons or one year (whichever occurs first) with a maximum flow rate of 1.5 GPM [5.7 L/min]. The Filter is intended for cold water use only. Installation should be in compliance with state and local laws and regulations.

Please visit www.whitehallmfg.com for most current specifications.

NSF/ANSI/CAN 61: Q ≤ 1

- NSF/ANSI/CAN 61 Compliant including lower lead leaching criteria.
- Tested to temperatures of 35°F - 100°F [2°C - 38°C]
- Operating pressure is not to exceed 105 PSIG (724 kPa)

Note: Declarations are based upon Third Party Verifications. Information is deemed reliable however, subject to change without notice.

Important: Do not use where the microbiological condition of the water is deemed unsafe or of unknown quality. Provide adequate disinfection before or after the unit.




3000 Gallon PFAS Filter Certifications



BASE MODEL NUMBER

WF3000 3000-Gallon PFAS Water Filter NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics

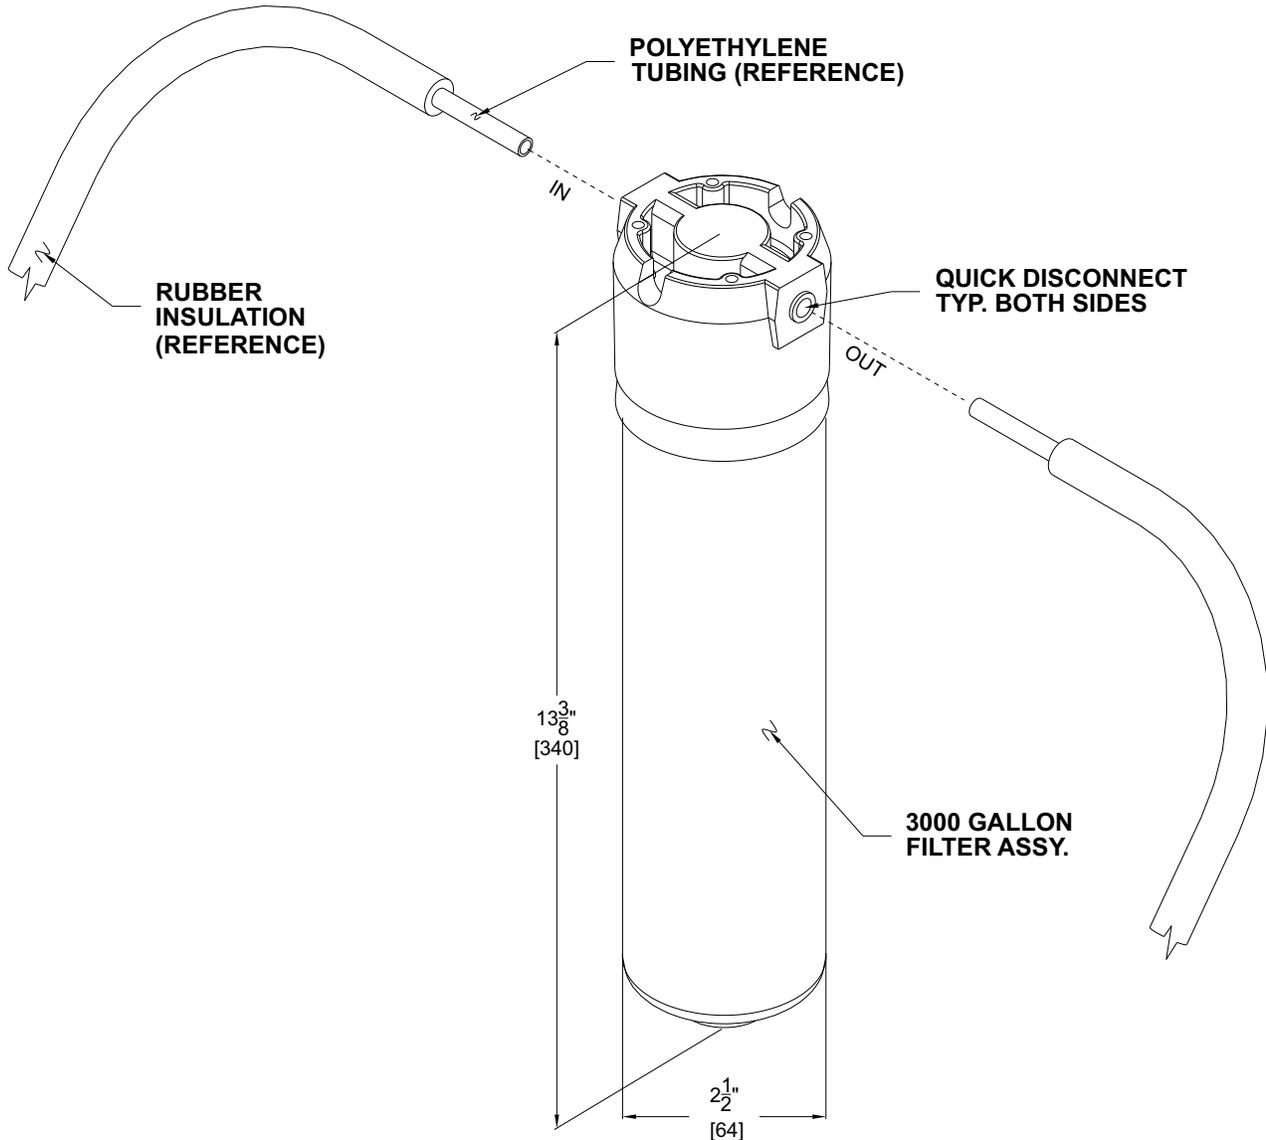

GENERAL NOTES:

1. MOUNTING HARDWARE VARIES BY PRODUCT.
2. CERTAIN ITEMS SHOWN ARE SUPPLIED WITH FOUNTAIN / BOTTLE FILLER PRODUCT.
3. ALL DIMENSIONS ARE IN INCHES [MM].

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
 Company _____ Date _____
 Contact _____ Title _____
 Approval for Manufacturing/Signature _____

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or suspended data © Whitehall Manufacturing, Member of Morris Group International. Please visit www.whitehallmfg.com for most current specifications.