



Dura-Ware® 2105 Series Siphon Jet Toilet - Off Floor



2105-W-1-CN

Fixture May Show Some Available Options



Please visit www.acorneng.com for most current specifications.

Siphon Jet Toilet - Off Floor

Fixture is arranged to be installed on finished wall from the front side and intended for mounting on a (4) Bolt in-Wall Support Carrier (by others). Unit is fabricated from 16 gage, type 304 stainless steel and is seamless welded construction. Exterior has a satin finish with an integral contoured seat. The inside of the toilet bowl also has a satin finish. Wall flange is reinforced for maximum strength.

Toilet is Siphon Jet type with elongated bowl manufactured to comply with ASME A112.19.3-2008 and CSA B45.4-2008 standards. Toilet requires a minimum of 25 PSI flow pressure and uses a minimum water consumption of 1.28 GPF. Trap has a minimum 3-1/2" seal, will pass a 2-1/8" ball and is fully enclosed. Toilet has a 1-1/2" NPT flush valve connection and a gasketed waste outlet.

Flush Valve supply is additionally available for exposed or concealed flush valve styles in 1.28 GPF, 1.6 GPF or 3.5 GPF with 1-1/2" NPT connection.

GUIDE SPECIFICATION

Provide and install Acorn Dura-Ware Siphon Jet Toilet (specify model number and options). Fixture shall be fabricated from 16 gage, type 304 stainless steel. Construction shall be seamless welded and exposed surfaces shall have a satin finish with an integral contoured toilet seat. Toilet shall be concealed Siphon Jet type with an elongated bowl and a self-draining flushing rim. Toilet shall be ASME A112.19.3-2008 and CSA B45.4-2008 compliant. Toilet requires a minimum of 25 PSI flow pressure and uses a minimum water consumption of 1.28 GPF. Toilet trap shall have a minimum 3-1/2" seal that shall pass a 2-1/8" diameter ball and be fully enclosed. Toilet waste outlet shall be a gasketed waste.

Compatible Water Closet Support

www.jrsmith.com/uploads/fileLibrary/pm2584.pdf

Dura-Ware®: 2105 Siphon Jet Toilet - Off Floor



WALL THICKNESS AND TYPE (Must Specify)

Thickness: _____ Type: Concrete Block Steel

MODEL NUMBER AND OPTIONS SELECTION:

BASE MODEL NUMBER

2105 Siphon Jet Toilet

SUPPLY (Must Specify)

-T Top (Exposed)
 -W Wall (Concealed)

FIXTURE MOUNTING AND WASTE

-1 Off-Floor, Wall Outlet
 -ADA 18" Integral Seat Height

FLUSH VALVE GPFs (Must Specify)

-1.28 GPF
 -1.6 GPF (Not Available in California)
 -3.5 GPF (Not Available in California)

FLUSH VALVE OPTIONS (Must Specify)

***NOTE: FOR FLUSH VALVE ACCESS PANEL OR COVER REFER TO ACORN MODEL #2898 (-W SUPPLY) OR #2802 (-T SUPPLY).**

-FV Flush Valve, Mechanical (-W, -T, -T-ADA, N/A for -W-ADA)
 -FVBO Flush Valve by Others (Select with 2898 & 2802 Covers)
 -FVH Flush Valve, ADA Hydraulic (-W and -W-ADA Only)
 -FVL Flush Valve, ADA Lever Handle (-W and -W-ADA Only)
 -MVCFV Time-Trol® Flush Valve (-W and -W-ADA Only)

TOILET SEAT OPTIONS

-HPS High Polish Integral Seat
 -HS-OFLC Hinged Seat, Open Front Less Cover
 -HS-OFWC Hinged Seat w/ Cover
 -PFS Punched for Seat by Others

TOILET OPTIONS

-FT Flood-Trol (N/A with Top Supply)**
 -FTA Flood-Trol Auto-Reset (N/A with Top Supply)**
 -FTE Flood-Trol Electronic**


(NOTE: **Not available with Top Supply. Requires min. 6" wall depth and Access Panel to install and service.)

-FVT Flush Thru Wall Connector
 -PE Plain End Waste Extended 3" Beyond Rear of Fixture
 -TSC Toilet Shipping Cover

PRODUCT OPTIONS

-BCN Blind Cap Nuts (4)
 -BL Bedpan Lugs
 -CN Cap Nuts (4)
 -EGE Enviro-Glaze Color Specify: _____ Toilet Exterior Only
 -FG 14 Gage Housing
 -TF Transformer, 120VAC to 24VAC (-MVCFV option)
 -VAC AcornVac System

Please visit www.acorneng.com for most current specifications.

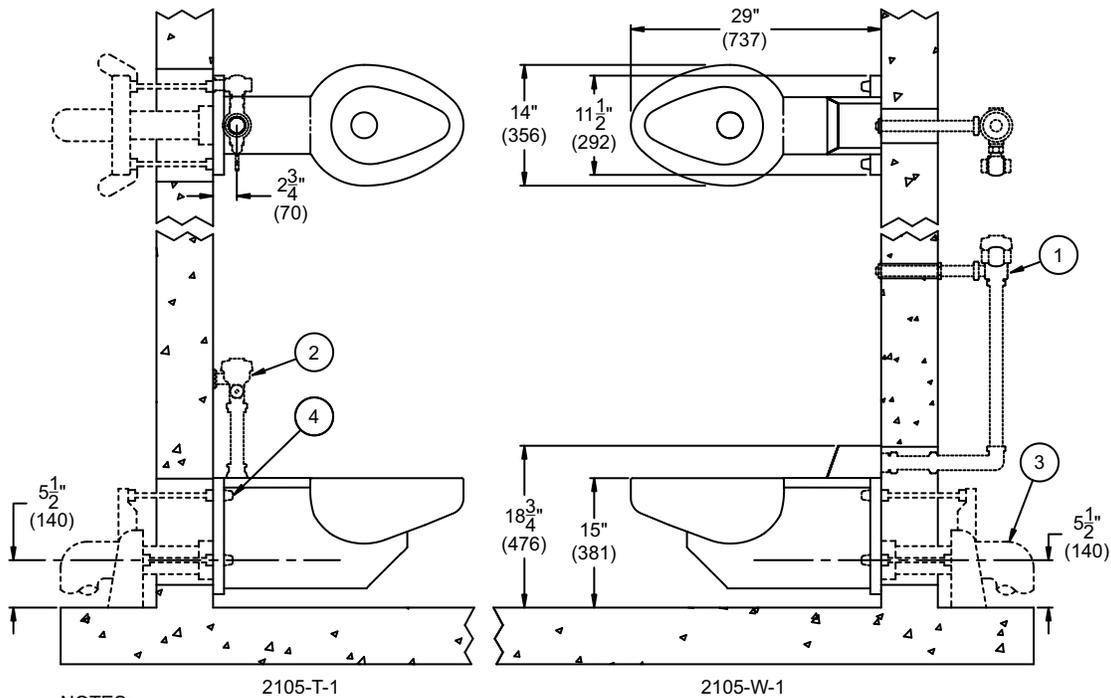

NOTES:

1. Optional -FV Flush Valve - Wall Supply
2. Optional -FV Flush Valve - Top Supply

3. Mounting Carrier (By Others)
4. Optional -CN Cap Nuts

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

<p>Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2009 Acorn Engineering Company</p>	
<p style="text-align: center;">Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>