



# CONROLS

## PRESSURE REDUCING VALVES

MODEL YRV03 SERIES

**SIZES: 1/2", 3/4", 1", 1-1/4", 1-1/2", AND 2"**

**USED IN RESIDENTIAL, COMMERCIAL, INSTITUTIONAL, AND INDUSTRIAL APPLICATIONS.**

Eliminate the need to install a "Y" strainer along with a pressure reducing valve. The Acorn ConTrols® YRV03 Pressure Reducing Valve integrates a "Y" strainer into its design, streamlining installation.


### FEATURES

- » All Stainless Steel Hardware eliminates need for "Sealed Cage"
- » Integral 300 Series Stainless Steel Strainer
- » Integral "Y" Strainer with 20 x 20 Stainless Steel Mesh  
Provides two levels of straining — coarse and fine.  
Allows for easy blow-down to remove debris from the first strainer.
- » Utilizes the same repair parts and adapter kits as the RV03 valve
- » Available Valve Sizes 1/2" to 2"
- » Sweat, NPTF, PEX-A, PEX-B, Press Fit and CPVC Adapter Kits
- » Brass Body and Internal Stem
- » Lead-free construction meets NSF 61 Requirements
- » EPDM Seals and Reinforced Rolling Diaphragm
- » Available with Engineered UV Resistant Thermoplastic, Brass or Steel Bonnet
- » Optional Pressure Gauge Available
- » Valve Bodies and Gauge Adapters have female NPT threads to allow for installation without optional adapter(s).

### STANDARDS

- » NSF/ANSI 61
- » ASSE 1003
- » CSA B356-10
- » UPC
- » Lead-Free

MODEL YRV03PH-5AAG

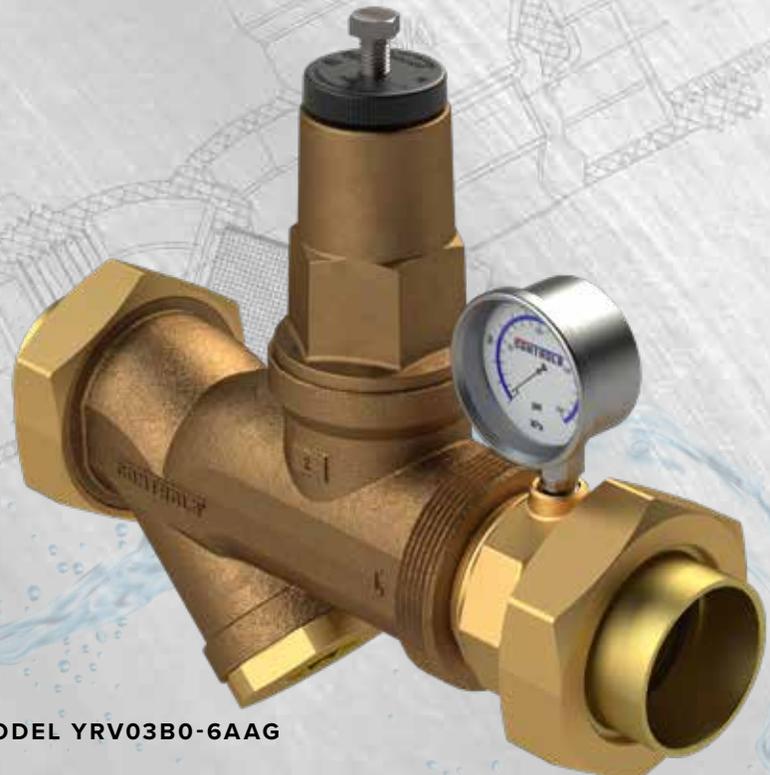

MODEL YRV03B0-6AAG



 MORRIS GROUP INTERNATIONAL

WWW.MORRISGROUPINT.COM

# PRESSURE REDUCING VALVES

## YRV03

INLET

OUTLET

### BONNET MATERIAL

- » **B0** | Brass
- » **P0** | Plastic
- » **S0** | Steel
- » **BH** | Brass High Pressure Spring
- » **PH** | Plastic High Pressure Spring
- » **SH** | Steel High Pressure Spring

### VALVE SIZE

- » **1** | 1/2"
- » **2** | 3/4"
- » **3** | 1"
- » **4** | 1-1/4"
- » **5** | 1-1/2"
- » **6** | 2"

### ADAPTER TYPE

- » **0** | None
- » **A** | Sweat
- » **B** | NPTF
- » **C** | PEX-B
- » **D** | CPVC
- » **E** | Press Fit
- » **F** | PEX-A

### PRESSURE GAUGE

- » **0** | No Gauge Adapter
- » **G** | Adapter with 0-20psi Gauge
- » **T** | Adapter with 1/4" Plug (No Gauge)

### OPTIONAL PRESET

- » Indicate Factory Preset Pressure required when it differs from the Standard Factory Preset of 50 PSI.



MODEL YRV03B0-3AAG

MODEL YRV03S0-4DD0



**STREET ADDRESS**  
15125 PROCTOR AVENUE  
CITY OF INDUSTRY, CA 91746

**MAILING ADDRESS**  
P.O. BOX 3527  
CITY OF INDUSTRY, CA 91744

**PHONE:** (626) 336-4561  
**E-MAIL:** CUSTSERV@ACORN-CONTROLS.COM  
**WEBSITE:** ACORN-CONTROLS.COM

 **WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

L1001688 | 0325