


FLOOR DRAINS STAINLESS STEEL - CARBON STEEL

8 1/2" (215) ROUND TOP SOLID SCORIATED COVER AND CLOSURE PLUG

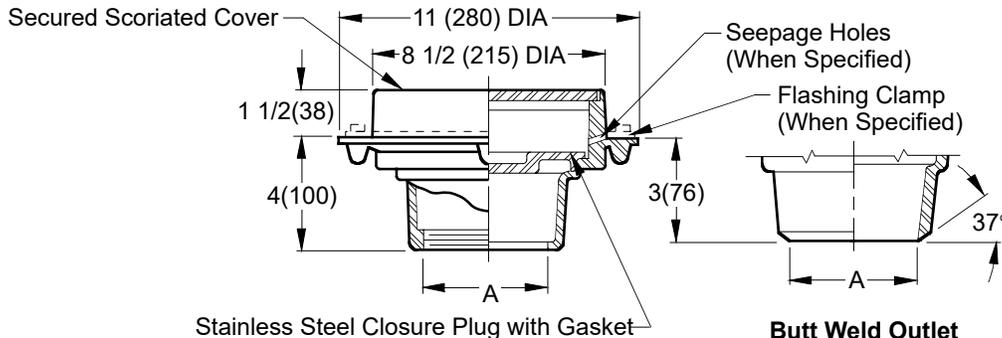

Butt Weld Outlet
 Schedule 40 Regularly Furnished
 (specify schedule if different -S05,
 -S10 or -S80)

A (Pipe Size) = 02(50), 03(75) or 04(100)

- Fig. 9720BW . . . BUTT WELD OUTLET
- Fig. 9720C . . . CAULK OUTLET
- Fig. 9720T . . . THREADED OUTLET
- Fig. 9720Y . . . NO-HUB OUTLET

REGULARLY FURNISHED:

CF8 (Equivalent to Type 304) Rough Finish Stainless Steel Body, Secured Scoriated Cover and Stainless Steel Closure Plug with Gasket.

VARIATIONS:

- 4"(100) Extension -E04
- Plastic Closure Plug and Gasket -XPP
- Closure Plug with 3/4" (19) Test Plug -TP (Specify Material)
- Flashing Clamp with Seepage Holes -C
- Satin Finish Top -SF
- Seepage Holes -WSH
- Vandal Proof -U
- 90° Side Outlet (Specify Fig. 9759)

OPTIONAL MATERIALS:

- A-27 Carbon Steel -A27
- CF8M (Equivalent to Type 316) Stainless Steel -316

Design Pressures and Temperatures

- With proper outlet connection, shall be watertight up to 10 ft. of water column (4.34 psig).
- When exposed to effluent appropriate for drain material, the drain shall withstand effluent temperatures of 180 degrees F at ambient pressure.

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: S9720
 SIZE: A
 SCALE: NONE
 DATE: 11-12-84
 APPROVED BY: TD
 CHECKED BY: VGD
 DRAWN BY: PJ
 FIGURE NUMBER: 9720
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

J	8-28-23	Removed Function	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 9720
H	11-18-20	Revised Opt.(s), Butt Weld Outlet	MW	CL			
G	10-18-11	Added Note	TBW	CL			
F	4-28-06	Revised Variations	RN	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			