


FLOOR DRAIN

Load Rating: Light Duty having a Safe Live (Static) Load less than 2,000 lbs. (900 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

FREE AREA
9.25 SQ IN
(59.67 SQ CM)

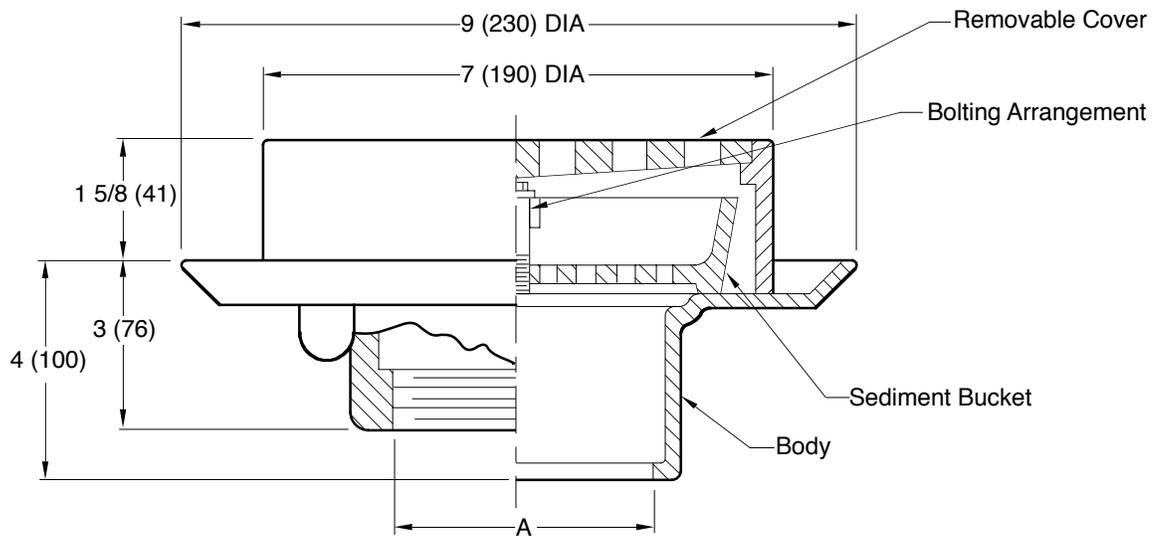

A(pipe Size) = 02(50), 03(75) or 04(100)

- Fig. 2109C . . . CAULK OUTLET
- Fig. 2109T . . . THREADED OUTLET
- Fig. 2109Y . . . NO-HUB OUTLET

REGULARLY FURNISHED:
Duct Cast Iron Body, Sediment Bucket and Grate.

- VARIATIONS:**
- Flat Bottom Strainer -FBS
 - Non-Tilting Grate L/ Bucket (Specify Fig. 2108)
 - Side Outlet
 - L Speedi-Set® Service Weight Outlet
 - LXH Speedi-Set® Extra Heavy Outlet
 - Quad Close Trap Seal (Specify Fig. 2692)
 - Trap Primer Connection -P050 1/2(13), -P075 3/4(19)

- OPTIONAL MATERIALS:**
- All Galvanized -G
 - Nickel Bronze Top -NB
 - Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

2109

FIGURE NUMBER	P N M L	3-10-23 12-8-22 5-3-22 7-25-19	Added ® to "Speedi-Set" Removed Seepage Opening Added Free Area, Rev. Vari. & Op.M Added Load Rating	KK KK KK MW	CL JT CL JM	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2109
REV.	DATE	DESCRIPTION	BY	CKD. BY				